

#12414 / 12 Designs

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.







12414-01 Barn Appliqué 4.41 X 4.20 in. 112.01 X 106.68 mm 5,310 St.

12414-02 Fence 1.59 X 4.58 in. 40.39 X 116.33 mm 8,187 St. ♥

12414-03 Tractor Appliqué 3.90 X 3.54 in. 99.06 X 89.92 mm 4,423 St. ♥

12414-04 Truck Appliqué 3.41 X 6.02 in. 86.61 X 152.91 mm 4,197 St. ♥ L



12414-05 Cow Appliqué4.33 X 3.80 in.
109.98 X 96.52 mm
4,205 St. •



12414-06 Pony Appliqué 3.97 X 4.87 in. 100.84 X 123.70 mm 3,066 St.



12414-07 Pig Appliqué 3.41 X 2.40 in. 86.61 X 60.96 mm 1,874 St. ♥



12414-08 Rooster Appliqué 2.79 X 3.60 in. 70.87 X 91.44 mm 1,665 St.



12414-09 Labrador Appliqué 3.45 X 2.81 in. 87.63 X 71.37 mm 993 St.



12414-10 Tree Appliqué 2.73 X 3.67 in. 69.34 X 93.22 mm 892 St.



12414-11 Tree 2 Appliqué 3.03 X 4.43 in. 76.96 X 102692.20 mm 1,527 St. L



12414-12 EIEIO Appliqué 2.32 X 7.50 in. 58.93 X 190.50 mm 1,948 St. L

- ★ Design contains a loose fill.
- Some white areas shown are not stitched.

- L Design is larger than 5" (127 mm) in either direction.
- S Design is smaller than 1.5" (38.1 mm) in either direction.



#12414 / 12 Designs

Listings below indicate color sample, stitching order and suggested thread color number. Most numbers indicate Isacord thread. However, colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

12414-01 Barn Applique	
1. Barn Placement Stitch	0015
2. Barn Tackdown	0800
3. Barn Detail	0015
4. Roof	1366
12414-02 Fence	
1. Fence	
2. Fence Linework	0015
12414-03 Tractor Appliqué	
☐ 1. Tractor Placement Stitch	
2. Tractor Tackdown	
☐ 3. Window Placement Stitch	0015
4. Window Tackdown & Smokestack	3971
☐ 5. Tire Placement Stitch	0015
☐ 6. Tire Tackdown	0015
7. Rims	0800
8. Rim Details	0015
12414-04 Truck Appliqué	
□ 1. Truck Placement Stitch	0015
2. Truck Tackdown	5944
☐ 3. Window Placement Stitch & Details	0015
4. Window Tackdown	5833
5. Bumpers	3971
☐ 6. Tire Placement Stitch	0015
☐ 7. Tire Tackdown & Rims	0015
8. Tire Details	0108

12414-05 Cow Appliqué	
☐ 1. Cow Placement Stitch	0015
2. Hooves	0108
☐ 3. Cow Tackdown	
4. Pink Details	
= 5. Tail	
6. Face Details	
7. Horns	
12414-06 Pony Appliqué	
☐ 1. Horse Placement Stitch	0015
2. Hooves	
3. Horse Tackdown & Details	
4. Mane & Tail Linework	
12414-07 Pig Appliqué	
■ 1. Pig Placement Stitch	0015
2. Hooves	0108
3. Pig Tackdown & Details	2363
4. Eye	4174
12414 00 D A 1: 4	
12414-08 Rooster Appliqué ☐ 1. Chicken Placement Stitch	0015
2. Chicken Tackdown	
3. Eye	
4. Comb & Wattle	
5. Tail Placement Stitch	
6. Tail Tackdown, Beak, & Feet	

12414-09 Labrador Appliqué	
□ 1. Puppy Placement Stitch	0015
2. Puppy Tackdown	
3. Face Details	
4. Eye Outlines	
12414-10 Tree Appliqué	
□ 1. Trunk Placement Stitch	0015
2. Trunk Tackdown & Linework	0532
□ 3. Tree Top Placement Stitch	0015
4. Tree Top Tackdown	
12414-11 Tree 2 Appliqué	
1. Trunk Placement Stitch	0015
2. Trunk Tackdown & Linework	
☐ 3. Tree Top Placement Stitch	
4. Tree Top Tackdown	
5. Tree Top Linework	
12414-12 EIEIO Appliqué	
□ 1. Letters Placement Stitch	0015
2 Letters Tackdown	

Note: Appliqué fabric not included.



Appliqué Instructions

Pre-Cut Appliqué Instructions

- 1. Print out the necessary pages from the PDF of the applique pattern(s).
- 2. Mark the right side of the pattern pieces so you'll know which direction to lay the pattern on the fabric.
- 3. Lightly spray the wrong side of the pattern pieces with temporary adhesive spray and allow it to set for a few minutes.
- 4. Place the pattern pieces on the right side of the fabric and carefuly cut them out. **PHOTO 1**
- 5. Sew the placement stitch on your hooped fabric. **PHOTO 2**
- 6. With the paper still stuck to the right side of the appliqué fabric, spray the wrong side of the fabric with temporary spray adhesive.
- 7. Place the fabric inside the sewing placement stitch so that it matches the stitching line then remove the paper pattern. **PHOTO 3**
- 8. Sew the tackdown. **PHOTO 4**
- 9. Sew the remainder of the design and repeat for any remaining pieces. **PHOTO 5**

NOTE: The patterns are sized for the designs as they were made. If you resize the design, you will need to resize the pattern the same amount. You can print out the pattern at the normal size then copy it on a copy machine at the changed size, i.e. resize the designs to 80%, resize the printed pattern to 80%.

TIP: When Printing the patterns, make sure that the "Fit to page" option is UNCHECKED in the Print Dialog Box. If this option is checked the printed patterns will not be actual size.














Appliqué Patterns


ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

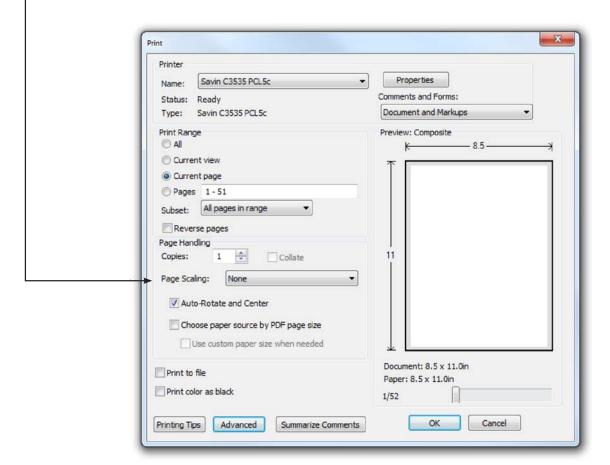

TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.



It is a violation of Copyright law to make and distribute copies of software or artwork. Software is licensed to the original purchaser for use at one location. ©2012 OESD, LLC. All rights reserved.



