
#12512

- 14 applique designs
- 1 freestanding lace design
- Project instructions included



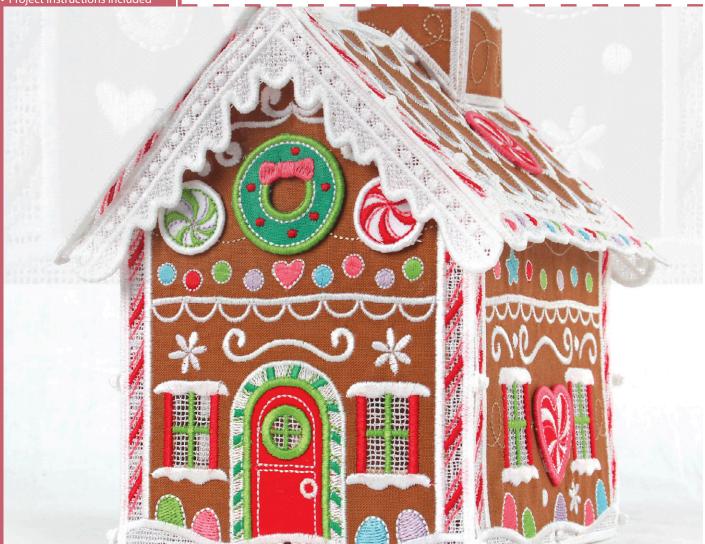

] DESIGNS

Freestanding Gingerbread House

THREAD LIST



Isacord Thread Colors

0015 White

1061 Taupe

3040 Lavender

4430 Island Waters

2220 Tropicana

5912 Erin Green

1900 Geranium

5613 Light Kelly

DESIGNS



Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

*Fabric Required

12512-01 Front Wall FSA

Size	Inches:	Size mm:	Stitch Count:
4.92	X 6.47 in.	124.97 X 164.34 mm	n 37,419 St.
□ 1.	Wall Placen	nent Stitch	0015
2 .	Window Cut	t Outs, Wall Cut Line & Ta	ckdown0015
☐ 3.	Door Placer	ment Stitch	0015
4 .	Wreath Cut	Out, Door Cut Line & Tac	kdown0015
5.	Tan Linewoo	rk	1061
		dy	
9.	Green Cand	dy	5912
□ 10.	White Lace	& Detail	0015
		Candy Stripes	
		& Window Trim	
	•	Stripes	
		Stripes & Window Trim	
□ 1 5.	White Cove	r Stitch & Detail	0015





*Fabric Required



12512-02 Back Wall FSA

Size	Inches:	Size mm:	Stitch Count:
4.92	X 6.47 in.	124.97 X 164.34 mm	36,056 St.
□ 1.	Wall Placen	nent Stitch	0015
2 .	Window Cu	t Out, Wall Cut Line & Tack	down 0015
3.	Green Cand	dy Placement Stitch	5613
4.	Green Cand	dy Cut Line & Tackdown	5613
		dy Stripes	
6.	Green Cand	dy Cover Stitch & Stripes	5912
7.	Tan Linewo	rk	1061
8.	White Lace	& Detail	0015
1 0.	Light Green	Candy & Window Trim	5912
11 .	Pink Candy	& Stripes	2220
		Stripes & Window Trim	
13.	Purple Can	dy & Stripes	3040
		r Stitch & Detail	

*Fabric Required



12512-03 Right Wall FSA

Size	Inches:	Size mm:	Stitch Count:
5.47	X 4.45 in.	138.94 X 113.03 mm	30,422 St.
2 .	Window Cu	Placement Stitcht Nuts, Right Wall Cut Line	& Tackdown0015
☐ 3.	White Lace		0015
4.	Tan Linewo	rk	1061
5.	Light Green	Candy & Window Trim	5912
6.	Purple Can	dy	3040
7.	Blue Candy	,	4430
8.	Pink Candy	& Stripes	2220
		Stripes & Window Trim	
	•	r Stitch & Detail	





*Fabric Required

12512-04 Left Wall FSA




Size	Inches:	Size mm:	Stitch Count:
5.47	X 4.45 in.	138.94 X 113.03 mm	n 30,231 St.
□ 1.	Left Wall Pla	acement Stitch	0015
2 .	Window Cu	t Out, Left Wall Cut Line 8	& Tackdown 0015
		rk	
4 .	Red Candy	Placement Stitch	0015
5 .	Red Candy	Cut Line & Tackdown	0015
6.	Red Candy	Stripes	1900
7.	Red Candy	Cover Stitch & Stripes	2220
8 .	White Lace	& Detail	0015
9.	Green Cand	dy & Window Trim	5912
10.	Purple Can	dy	3040
1 2.	Pink Candy	& Stripes	2220
		& Stripes	
<u> </u>	White Cove	r Stitch & Detail	0015

*Fabric Required

12512-05 Right Roof FSA

Size mm:

Size Inches:

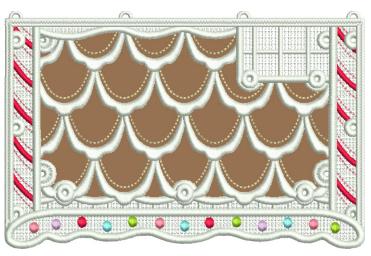

6.58	X 4.34 in. 167.13 X 110.24 mm	40,088 St.
□ 1.	Right Roof Placement Stitch	0015
2 .	Right Roof Cut Line & Tackdown	0015
3.	Tan Linework	1061
4 .	White Lace	0015
5.	Pink Candy & Stripes	2220
6.	Red Candy & Stripes	1900
7.	Green Candy	5912
8.	Purple Candy	3040
9.	Blue Candy	4430
□ 10.	White Cover Stitch & Detail	0015


Stitch Count:






*Fabric Required



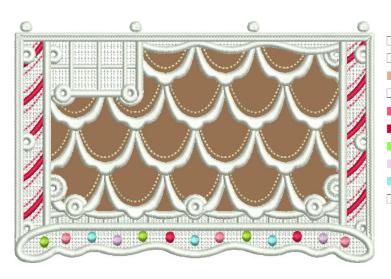

Size Inches:		Size mm:	Stitch Count:
6.58	X 4.42 in. 1	67.13 X 112.27 mm	40,266 St.
□ 1	Left Roof Place	ement Stitch	0015
		ine & Tackdown	
3.	Tan Linework		1061
4 .	White Lace		0015
5.	Pink Candy & S	Stripes	2220
6.	Red Candy & S	Stripes	1900
7.	Green Candy		5912
8.	Purple Candy .		3040
9.	Blue Candy		4430
□ 10.	White Cover St	titch & Detail	0015

*Fabric Required




12512-07 Chimney FSA

Size Inches:		Size mm:	Stitch Count:
1.84	X 6.81 in.	46.74 X 172.97 mm	15,670 St.
□ 1.	Chimney Pl	acement Stitch	0015
□ 2.	Chimney Cu	ut Lines & Tackdown	0015
3.	Tan Linewo	rk	1061
4.	White Cove	r Stitch & Detail	0015






*Fabric Required

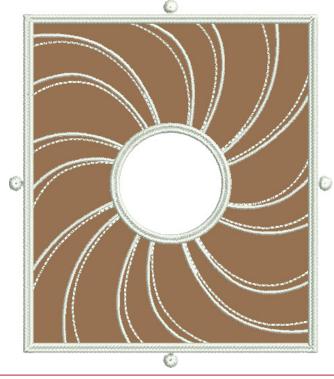

12512-08 Floor FSA

Size	inches:	Size mm:	Stitch Count:
4.95	X 5.64 in.	125.73 X 143.26 mm	15,672 St.
□ 1.	Floor Place	ment Stitch	0015
2 .	Candle Cut	Out, Floor Cut Line & Tack	down 0015
☐ 3.	White Cove	r Stitch & Detail	0015

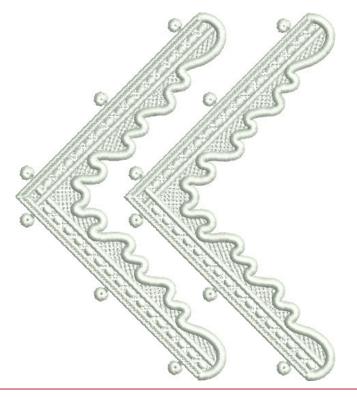

12512-09 Icicles FSL

Size Inches:	Size mm:	Stitch Count:
4.87 X 5.61 in.	123.70 X 142.49 mm	27,553 St.
☐ 1. Single Colo	r Design	0015





*Fabric Required





Size Inches:	Size mm:	Stitch Count:
1.41 X 1.41 in.	35.81 X 35.81 mm	2,412 St.
1. Wreath Plac	ement Stitch	5912
	Out, Wreath Cut Line & Tac	
3. Cover Stitch		5912
4. Bow		2220
5. Berries		1900
6. White Linew	ork	0015

*Fabric Required





12512-11 Mini Candies FSA

Size Inches: .91 X 4.86 in.		Size mm: 23.11 X 123.44 mm	
1. 2. 3. 4. 5. 6. 7. 8. 9.	Candy Plac Candy Cut I Top Candy Top Candy Middle Can Middle Can Middle Can Bottom Can	23.11 X 123.44 mm ement Stitches	
		dy Blue Swirls	







*Fabric Required



12512-12 Mini Buttons FSA

Size Ind	ches:	Size mn	n:	Stitch Count:
1.03 X 3	.23 in.	26.16 X 82.0)4 mm	2,574 St.
□ 1. Bu	tton Place	ment Stitch		0015
□ 2. Bu	tton Cut L	ines & Tackdowr	1	0015
3. Top	p Button (over Stitch & Lir	iework	5912
☐ 4. Top	p Button V	Vhite Linework		0015
5. Bo	ttom Butto	on Cover Stitch 8	Linework	2220
☐ 6. Bo	ttom Butto	n White Linewor	k	0015



*Fabric Required




12512-13 Candy Heart FSA

Size Inches:		Size mm:	Stitch Count:
1.29	X 1.27 in.	32.77 X 32.26 mm	2,055 St.
1. Heart Placement Stitch			1900
2. Heart Cut Line & Tackdown			1900
3. Pink Cover Stitch & Linework			2220
4	White Swirls	s & Linework	0015





*Fabric Required



1.28 X 1.28 in.

Size Inches:

Stitch Count: 1,590 St.

Stitch Count:



1.	Button Placement Stitch	2220
2.	Button Cut Line & Tackdown	2220
3.	Pink Cover Stitch & Linework	2220
4.	White Linework	0015

32.51 X 32.51 mm

*Fabric Required

12512-15 Candy FSA

Size mm:

1.28 X 1.28 in.	32.51 X 32.51 mm	2,043 St.
1. Candy Place	ement Stitch	2220
2. Candy Cut	2220	
3. Pink Cover		
4. Red Stripes	· }	1900




STEP 1

- The same technique will be used for 12512-02 and 12512-04.
- Prep fabric by applying 2 sheets of StabilStick TearAway to the wrong side of the fabric.
- **Note** this stabilizes your fabric so it isn't too limp and produces a nice, crisp project.




STEP 2

- Hoop two sheets of AquaMesh.
- Stitch Wall Placement Stitch.
- Note we've stitched our placement stitch in brown for visibility

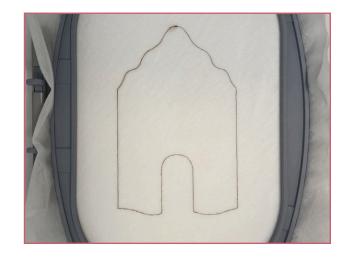


- Place fabric over placement stitch and make sure to cover stitches completely.
- Stitch Window Cut Outs, Wall Cut Line & Tackdown.
- **Optional** use TearAway tape to hold items in place.





STEP 4

- If tape was used, remove tape, carefully.
- Remove hoop from machine, **DO NOT** unhoop fabric/stabilizer.
- Trim along cut line.



STEP 5

- Stitch Door Placement Stitch.
- Place fabric over door as pictured, make sure to cover door opening completely.
- Stitch Wreath Cut Out, Door Cut Line & Tackdown.
- Optional use TearAway tape to hold items in place.



- If tape was used, remove tape, carefully.
- Remove hoop from machine, **DO NOT** unhoop fabric/stabilizer.
- Trim along cut line.





STEP 7

• Stitch Tan Linework.



STEP 8

• Stitch Purple Candy.



STEP 9

• Stitch Blue Candy.





STEP 10

• Stitch Pink Candy.



STEP 11

Stitch Green Candy.



STEP 12

• Stitch White Lace & Detail.





STEP 13

• Stitch Dark Green Candy Stripes.



STEP 14

Stitch Green Door & Window Trim.



STEP 15

• Stitch Pink Candy Stripes.





STEP 16

• Stitch Red Candy Stripes & Window Stripes.



STEP 17

Stitch White Cover Stitch & Detail.



- Remove from hoop, trim AquaMesh ¼"-½" away from fabric, be careful **NOT** to cut your eyelets or buttonettes!
- · Wash away stabilizer and let dry.
- **Note** for instructions and tips, see last page.






STEP 1

- The same technique will be used for 12512-03, 12512-05, 12512-06, 12512-07, 12512-10, 12512-11, 12512-12, 12512-13, 12512-14, and 12512-15.
- Prep fabric by applying 2 sheets of StabilStick TearAway to the wrong side of the fabric.
- Note this stabilizes your fabric so it isn't too limp and produces a nice, crisp project.




STEP 2

- · Hoop two sheets of AquaMesh.
- Stitch Floor Placement Stitch.



- Place fabric over placement stitch and make sure to cover stitches completely.
- Stitch Candle Cutout, Floor Cut Line & Tackdown.
- Optional use TearAway tape to hold items in place.






STEP 4

- · Remove tape, carefully.
- Remove hoop from machine, **DO NOT** unhoop fabric/stabilizer.
- Trim along cut line.




STEP 5

Stitch White Cover Stitch & Detail.



- Remove from hoop, trim AquaMesh ¼"-½" away from fabric, be careful **NOT** to cut your eyelets or buttonettes!
- Wash away stabilizer and let dry.
- **Note** for instructions and tips, see last page.





STEP 1

• For freestanding lace instructions and tips, see last page.



INSTRUCTIONS



Freestanding Gingerbread House - Summary Requires

- Front Wall FSA 12512-01
- Back Wall FSA 12512-02
- Right Wall FSA 12512-03
- Left Wall FSA 12512-04
- Right Roof FSA 12512-05
- Left Roof FSA 12512-06
- Chimney FSA 12512-07
- Floor FSA 12512-08
- Icicles FSL 12512-09

Optional

- Wreath FSA 12512-10
- Mini Candies FSA 12512-11
- Mini Buttons FSA 12512-12
- Candy Heart FSA 12512-13
- Button FSA 12512-14
- Candy FSA 12512-15

Supplies

- Embroidery thread
- Fabric for appliqué
- Embroidery machine
- Stabilizer
- Optional Alligator Clamps and Button Clips



Follow the General Freestanding Lace Guidelines and Cut in Place Appliqué Instructions and stitch the nine pieces required as listed in the summary above.

Adding Optional FSA Pieces

Glue or stitch on the Optional FSA pieces as desired. Photo 1

Build Gingerbread House Walls

- Attach the front wall (12512-01) to the right wall (12512-03) by inserting the three buttonettes along the right side of the front wall into the three eyelets on the left side of the right wall. **Photo 2**
- Repeat this process with the back wall (12512-02) and left wall (12512-04), until the wall structure is complete.
- Set aside assembled Gingerbread House wall structure.






Build Gingerbread House Roof and Chimney and Attach to Walls

- Connect right roof (12512-05) and left roof (12512-06) together by inserting buttonettes from the left side of one piece into the eyelets from the right side of the other piece.
- Attach the constructed roof to the gingerbread wall structure by inserting the buttonettes along the top of each wall section into the coordinating eyelets located toward the bottom of each roof piece. The buttonettes will be pulled up through the roof pieces. The chimney will be towards the back of the gingerbread house. **Photo 3**
- Connect the two buttonettes into the eyelets to form the chimney (12512-07). Attach the constructed roof to the gingerbread wall structure by inserting the three buttonettes along the top edge of the right wall section into the three

INSTRUCTIONS



- eyelets located near the bottom edge of the right roof section. The buttonettes will be pulled up through the roof slices. The chimney should be at the back of the house
- Attach the chimney to the back of the gingerbread house roof by inserting the four buttonettes along the bottom of the chimney into the coordinating eyelets located on either side of the back of the roof structure. **NOTE:** It is easier to reach in from the inside with a pair of alligator clamps and pull the buttonettes through the eyelets. **Photo 4**




Attach Gingerbread House Floor to Walls

• Connect the floor (12512-08) to all walls by inserting the floor buttonettes through the centered eyelets. **Photo 5**

Attach Icicles to Gingerbread House

• Attach the Icicles (12512-09) to the Front and Back roof overhang by inserting the buttonettes along the icicles into the coordinating eyelets located on the edge of the roof. The buttonettes will be pulled up through the roof pieces. **Photo 6**








INSTRUCTIONS



Cut in Place Appliqué Instructions Cut-in-Place Applique Instructions

- 1. Hoop your fabric and backing.
- 2. Sew the Placement stitch. PHOTO 1
- 3. Place a piece of applique fabric over the placement stitch so that it is completely covered.
- 4. Sew the Cut Line & Tackdown.
- 5. Carefully cut away the excess applique fabric. PHOTO 2
- 6. Sew the remainder of the design and repeat for any remaining pieces. PHOTO 3







General Freestanding Lace Guidelines

Supplies:

Embroidery Thread:

- Use the same embroidery thread in the bobbin as the needle. **Needles:**
- Use an Organ 80/12 Titanium needle for extended needle life. **Stabilizer:**
- Use OESD AquaMesh stabilizer.

Handy Hints:

For Stiffer Lace:

- DO NOT rinse away all of the stabilizer for a "stiffer" lace. Note that the thread may appear a shade darker if stabilizer is not removed completely.
- If you happen to wash too much out, easily re-stiffen by diluting some stabilizer scraps in water and dipping the item in the solution.

For Very Soft Lace:

 Cut away excess stabilizer. Remove remaining stabilizer by rinsing under warm running water until all traces of the stabilizer are gone. NOTE: If lace should become too limp to work with, dissolve stabilizer scraps in warm water and apply to the lace.

Drying Lace:

 The lace looks best when left to dry completely. Lay lace piece with right side down to dry. This will minimize the tendency for the lace to curl. Be sure to flatten the piece out entirely and allow ample time to dry.

General Instructions

- 1. Hoop two layers of OESD AquaMesh Stabilizer.
- 2. Attach the hoop to the machine and select the design of your choice.
- 3. Stitch the design.
- 4. Remove the hoop from the machine and the design from the hoop. Trim excess stabilizer from the design.
- 5. Rinse away remaining stabilizer and allow it to dry.

Handy Hints:

For 3D Lace Projects:

- If item becomes too limp to work with, iron the lace pieces on the wrong side while applying spray starch. After ironing, spray again with starch and allow to dry completely. This will stiffen the lace pieces nicely and aid in construction.
- A pair of tweezers, hemostats, stiletto or a tiny crochet hook can be extremely helpful when inserting the buttonettes into the eyelets. (Please see **Diagram 1** for explanation of "buttonette" and "eyelet".)
- Insert the tip of the alligator clamps, tweezers, hemostats or crochet hook into the eyelet, grasp the buttonette and pull through the eyelet. Or a stiletto could be used to push the buttonette through the eyelet.




Diagram 1