

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.



12624-01 Round Banner
5.42 X 5.89 in.
137.67 X 149.61 mm
2,986 St.



12624-02 Round Border Banner
5.42 X 5.59 in.
137.67 X 141.99 mm
2,315 St.



12624-03 Round Blank Banner
5.42 X 5.59 in.
137.67 X 141.99 mm
1,329 St.



12624-04 Triangle Banner
5.50 X 5.91 in.
139.7 X 150.11 mm
2,518 St.



12624-05 Triangle Border Banner
5.50 X 5.51 in.
139.7 X 139.95 mm
2,359 St.



12624-06 Blank Banner
5.50 X 5.51 in.
139.7 X 139.95 mm
1,236 St.



12624-07 Heart Banner
4.88 X 5.52 in.
123.95 X 140.21 mm
2,209 St.



12624-08 Heart Border Banner
4.79 X 5.52 in.
121.67 X 140.21 mm
2,369 St.



12624-09 Heart Blank Banner
4.79 X 5.52 in.
121.67 X 140.21 mm
1,171 St.



12624-10 Shield Banner
5.22 X 5.70 in.
132.59 X 144.78 mm
2,976 St.



12624-11 Shield Border Banner
5.22 X 5.52 in.
132.59 X 140.21 mm
2,392 St.



12624-12 Shield Blank Banner
5.22 X 5.52 in.
132.59 X 140.21 mm
1,311 St.

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.



12624-13 Castle Banner

5.38 X 5.50 in.
136.65 X 139.7 mm
2,693 St.



12624-14 Castle Border Banner

5.38 X 5.26 in.
136.65 X 133.60 mm
2,738 St.



12624-15 Castle Blank Banner

5.38 X 5.26 in.
136.65 X 133.60 mm
1,595 St.



12624-16 Cross Banner

4.99 X 6.83 in.
126.75 X 174.24 mm
3,035 St.



12624-17 Cross Border Banner

4.99 X 6.52 in.
126.75 X 165.61 mm
2,623 St.



12624-18 Cross Blank Banner

4.99 X 6.52 in.
126.75 X 165.61 mm
1,699 St.

Listings below indicate color sample, stitching order and suggested thread color number. Most numbers indicate Isacord thread. Colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

12624-01 Round Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
□	6.Stitching.....	0015
■	7.Ribbon and Back Placement Stitch.....	0020
■	8.Seam Stitch.....	0020

12624-02 Round Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-03 Round Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

12624-04 Triangle Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
□	6.Stitching.....	0015
■	7.Ribbon and Back Placement Stitch.....	0020
■	8.Seam Stitch.....	0020

12624-05 Triangle Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-06 Triangle Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

12624-07 Heart Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
□	6.Stitching.....	0015
■	7.Ribbon and Back Placement Stitch.....	0020
■	8.Seam Stitch.....	0020

12624-08 Heart Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-09 Heart Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

12624-10 Shield Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
■	6.Placement Guide 4.....	0020
■	7.Tackdown and Fold Line 4.....	0020
□	8.Stitching.....	0015
■	9.Ribbon and Back Placement Stitch.....	0020
■	10.Seam Stitch.....	0020

12624-11 Shield Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-12 Shield Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

12624-13 Castle Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
□	6.Stitching.....	0015
■	7.Ribbon and Back Placement Stitch.....	0020
■	8.Seam Stitch.....	0020

12624-14 Castle Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-15 Castle Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

12624-16 Cross Banner

■	1.Design Placement Stitch and Placement Guide 1....	0020
■	2.Placement Guide 2.....	0020
■	3.Tackdown and Fold Line 2.....	0020
■	4.Placement Guide 3.....	0020
■	5.Tackdown and Fold Line 3.....	0020
□	6.Stitching.....	0015
■	7.Ribbon and Back Placement Stitch.....	0020
■	8.Seam Stitch.....	0020

12624-17 Cross Border Banner

■	1.Design Placement Stitch.....	0020
□	2.Border.....	0015
■	3.Ribbon and Back Placement Stitch.....	0020
■	4.Seam Stitch.....	0020

12624-18 Cross Blank Banner

■	1.Design Placement Stitch.....	0020
■	2.Ribbon and Back Placement Stitch.....	0020
■	3.Seam Stitch.....	0020

Supplies

- OESD Fusible Tear Away
- Small appliqué iron
- Removable tape
- Fabric scraps (see fabric guides for sizes)
- 10” of ribbon for each bunting piece
- Point turner
- OESD Fuse & Seal or hand needle to close seam openings

Patchwork Bunting

Use these instructions for designs 12624-01, 12624-04, 12624-07, 12624-10, 12624-13, and 12624-16

1. Print the fabric guide for your selected design. **Photo 01**
2. Hoop a piece of OESD Fusible Tear Away with the fusible side UP. **Photo 02**
3. Select the desired design.
4. Stitch color change 1 on the stabilizer (no fabric). This will stitch the fabric placement lines. **Photo 03**
5. Cut a scrap of fabric that is at least ¼” larger than area 1 on your fabric placement guide. **Photo 04**
6. Place the fabric right side up over area 1 on the stabilizer. **Photo 05**
7. Press the fabric to the stabilizer with a small appliqué iron. If desired, use a Teflon pressing sheet to prevent touching the fusible area of the stabilizer to the sole of the iron. **Photo 06.**
8. Stitch color change 2, which will stitch a placement line for fabric 2. **Photo 07**
9. Trim fabric 1 to a ¼” seam allowance from the placement line on the side that overlaps area 2. See your fabric placement guide for reference. **Photo 08**
10. Cut a scrap of fabric that is at least ¼” larger than area 2 on all sides. This will be fabric 2. Use the fabric placement guide for reference for size and shape. **Photo 09**
11. Place fabric 2 right sides together with fabric 1, aligning the raw edge with the seam allowance you trimmed in step 9. **Photo 10**
12. Stitch color change 3, which will stitch a seam line for fabric 2. **Photo 11**
13. Remove the hoop from the machine. Fold back fabric 2 so it covers area 2. Press into place. **Photo 12**

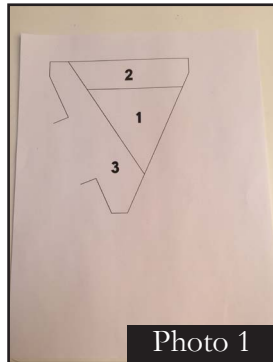


Photo 1



Photo 2



Photo 3

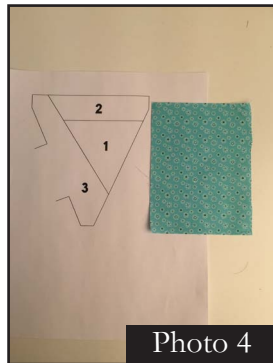


Photo 4



Photo 5

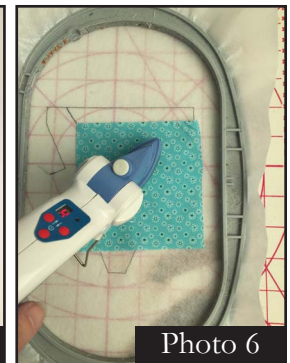


Photo 6



Photo 7

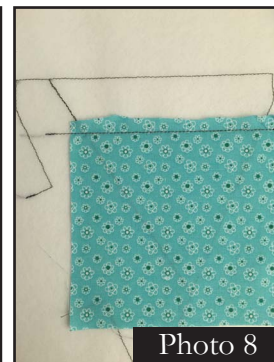


Photo 8

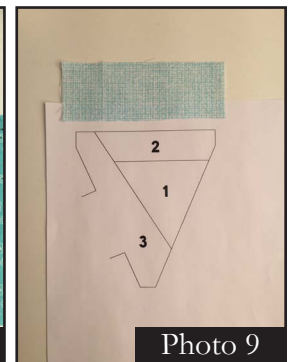


Photo 9



Photo 10

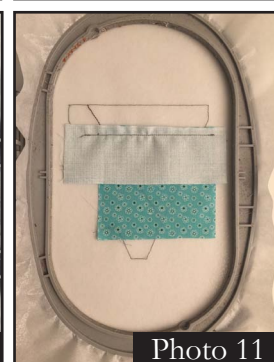


Photo 11



Photo 12

14. Replace the hoop on the machine. Stitch color change 4, which is the placement stitch for fabric 3. **Photo 13**

15. Trim fabric 1 & 2 to a 1/4" seam allowance from the placement line you just stitched. **Photo 14**

16. Cut a scrap of fabric that is at least 1/4" larger than area 3 on your fabric placement guide. **Photo 15**

17. Place fabric 3 right sides together with fabric 1 and 2, aligning the raw edges with the seam allowance you trimmed in step 15. **Photo 16**

18. Stitch color change 5, which is the seam stitch for fabric 3. **Photo 17**

19. Remove the hoop from the machine. Fold back fabric 3 so it covers area 3. Press into place. **Photo 18**

- For Design 12624-10, repeat steps 14-19 for the fourth fabric. Color change 6 will stitch the placement stitch for fabric 4. Color change 7 will stitch the seam line for fabric 4.

20. Replace the hoop on the machine. Stitch color change 6 (color change 8 for design 12624-10), which will stitch decorative stitches over the seams. **Photo 19**

21. Stitch color change 7 (color change 9 for design 12624-10), which will baste the fabrics to the stabilizer and provide a placement for the ribbons and the back of the bunting. **Photo 20**

22. Cut a length of ribbon approximately 10" long. Place each end of the ribbon so the cut end of the ribbon aligns with the ribbon tabs stitched in Step 21. Tape the ends of the ribbon in place. Tape the excess ribbon in place so it is entirely within the bunting – making sure it will not be caught by the seam. **Photo 21 and 22**

23. Cut a scrap of fabric at least 1/4" larger than the bunting placement line on all sides. Refer to the fabric placement guide for size and shape reference. This will be the backing fabric. **Photo 23**

24. Place the backing fabric right sides together with the hooped project, being sure to cover the entire placement line. Tape the edges of the backing in place to secure temporarily. **Photo 24**

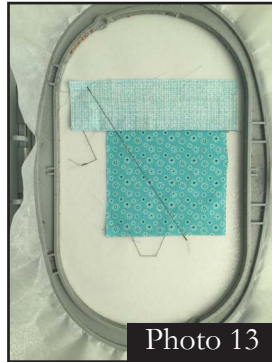


Photo 13



Photo 14

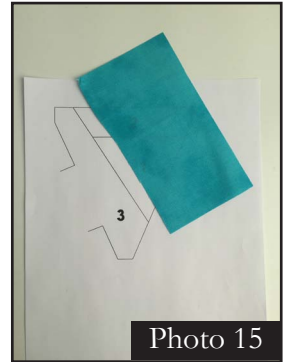


Photo 15



Photo 16



Photo 17



Photo 18



Photo 19



Photo 20

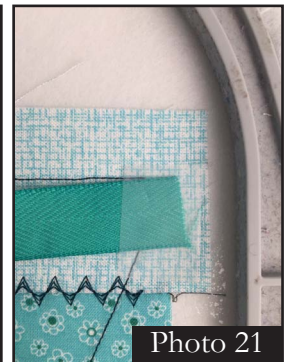


Photo 21



Photo 22

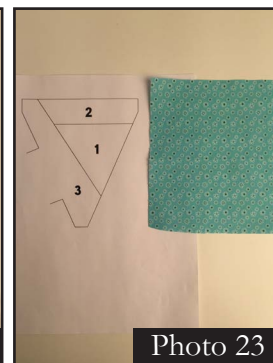


Photo 23



Photo 24

25. Stitch color change 8 (color change 10 for design 12624-10). This will be the seam stitch for the project. **Photo 25**
26. Remove the project from the hoop. Tear away the excess stabilizer. Trim the entire project to 1/4" from the seam line on all sides. Clip corners and grade curves. **Photo 26**
27. Turn the project through the opening in the seam. **Photo 27**
28. Use a point turner to smooth out corners. **Photo 28**
29. Press well. Seal the opening closed a small scrap of OESD Fuse & Seal or whipstitch closed with needle and thread. **Photo 29**
30. To tie bunting to the next bunting piece, clip the ribbon loop in half. Tie bunting pieces end to end as desired. **Photo 30 and 31**



Photo 25



Photo 26



Photo 27



Photo 28



Photo 29



Photo 30



Photo 31

Bordered Bunting

Use these instructions for designs 12624-02, 12624-05, 12624-08, 12624-11, 12624-14, and 12624-17

1. Hoop a piece of OESD Fusible Tear Away with the fusible side UP. **Photo 01**
2. Stitch color change 1 on the stabilizer (no fabric). **Photo 02**
3. Place a piece of fabric right side up over the placement line. Fabric should be larger than the placement line by at least 1/4" on all sides. Press into place with a small appliqué iron. **Photo 03**
4. Stitch color change 2, which will stitch the decorative border. **Photo 04**
5. Stitch color change 3, which will stitch the ribbon and back placement stitch. **Photo 05**
6. Cut a length of ribbon approximately 10" long. Place each end of the ribbon so the cut end of the ribbon aligns with the ribbon tabs stitched in Step 5. Tape the ends of the ribbon in place. Tape the excess ribbon in place so it is entirely within the bunting – making sure it will not be caught by the seam. **Photo 6**
7. Cut a scrap of fabric at least 1/4" larger than the bunting placement line on all sides. This will be the backing fabric. Place the backing fabric right sides together with the hooped project, being sure to cover the entire placement line. Tape the edges of the backing in place to secure temporarily. **Photo 7**
8. Stitch color change 4. This will be the seam stitch for the project. **Photo 8**
9. Remove the project from the hoop. Tear away the excess stabilizer. Trim the entire project to 1/4" from the seam line on all sides. Clip corners and grade curves. **Photo 9**
10. Turn the project through the opening in the seam. **Photo 10**
11. Use a point turner to smooth out corners. **Photo 11**
12. Press well. Seal the opening closed a small scrap of OESD Fuse & Seal or whipstitch closed with needle and thread. **Photo 12**
13. To tie bunting to the next bunting piece, clip the ribbon loop in half. Tie bunting pieces end to end as desired. **Photo 13 and 14**



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8




Photo 9



Photo 10



Photo 11




Photo 12



Photo 13




Photo 14

Solid Bunting

Use these instructions for designs 12624-03, 12624-06, 12624-09, 12624-12, 12624-15, and 12624-18

1. Hoop a piece of OESD Fusible Tear Away with the fusible side UP. **Photo 01**
2. Stitch color change 1 on the stabilizer (no fabric). **Photo 02**
3. Place a piece of fabric right side up over the placement line. Fabric should be larger than the placement line by at least $\frac{1}{4}$ " on all sides. Press into place with a small appliqué iron. **Photo 03**
4. Stitch color change 2, which will stitch the ribbon and back placement stitch. **Photo 04**
5. Cut a length of ribbon approximately 10" long. Place each end of the ribbon so the cut end of the ribbon aligns with the ribbon tabs stitched in Step 4. Tape the ends of the ribbon in place. Tape the excess ribbon in place so it is entirely within the bunting – making sure it will not be caught by the seam. **Photos 5 and 6**
6. Cut a scrap of fabric at least $\frac{1}{4}$ " larger than the bunting placement line on all sides. This will be the backing fabric. Place the backing fabric right sides together with the hooped project, being sure to cover the entire placement line. Tape the edges of the backing in place to secure temporarily. **Photo 7**
7. Stitch color change 3. This will be the seam stitch for the project. **Photo 8**
8. Remove the project from the hoop. Tear away the excess stabilizer. Trim the entire project to $\frac{1}{4}$ " from the seam line on all sides. Clip corners and grade curves. **Photo 9**
9. Turn the project through the opening in the seam. **Photo 10**
10. Use a point turner to smooth out corners. **Photo 11**
11. Press well. Seal the opening closed a small scrap of OESD Fuse & Seal or whipstitch closed with needle and thread. **Photo 12**
12. To tie bunting to the next bunting piece, clip the ribbon loop in half. Tie bunting pieces end to end as desired. **Photo 13 and 14**



Photo 1



Photo 2




Photo 3



Photo 4




Photo 5




Photo 6



Photo 7




Photo 8



Photo 9



Photo 10



Photo 11



Photo 12




Photo 13



Photo 14


ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

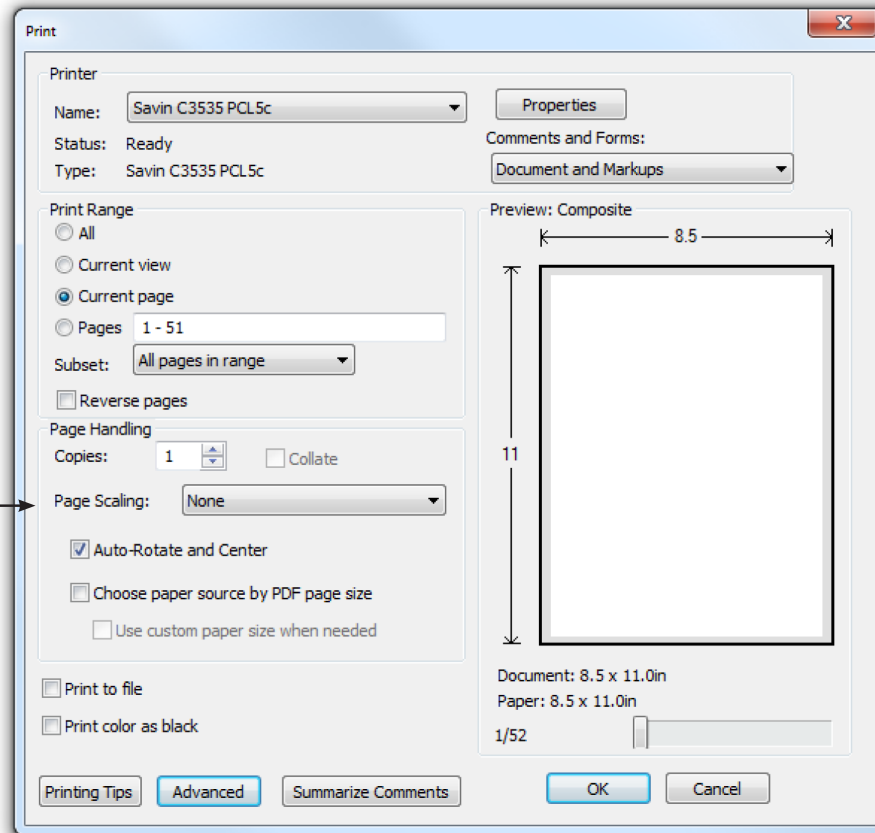


TO SAVE PAPER


Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.

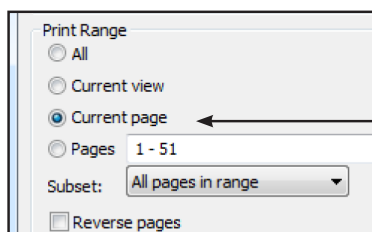


12624-01

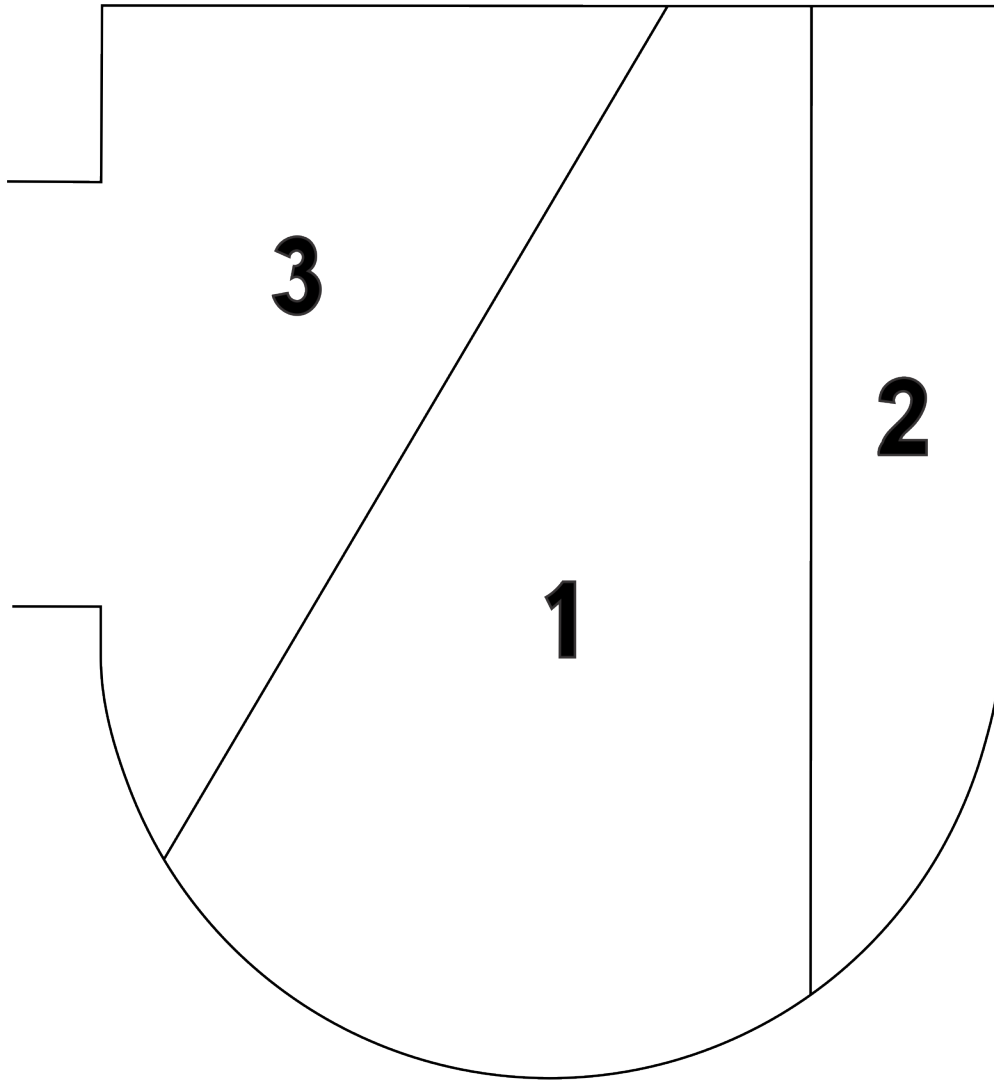


12624-04

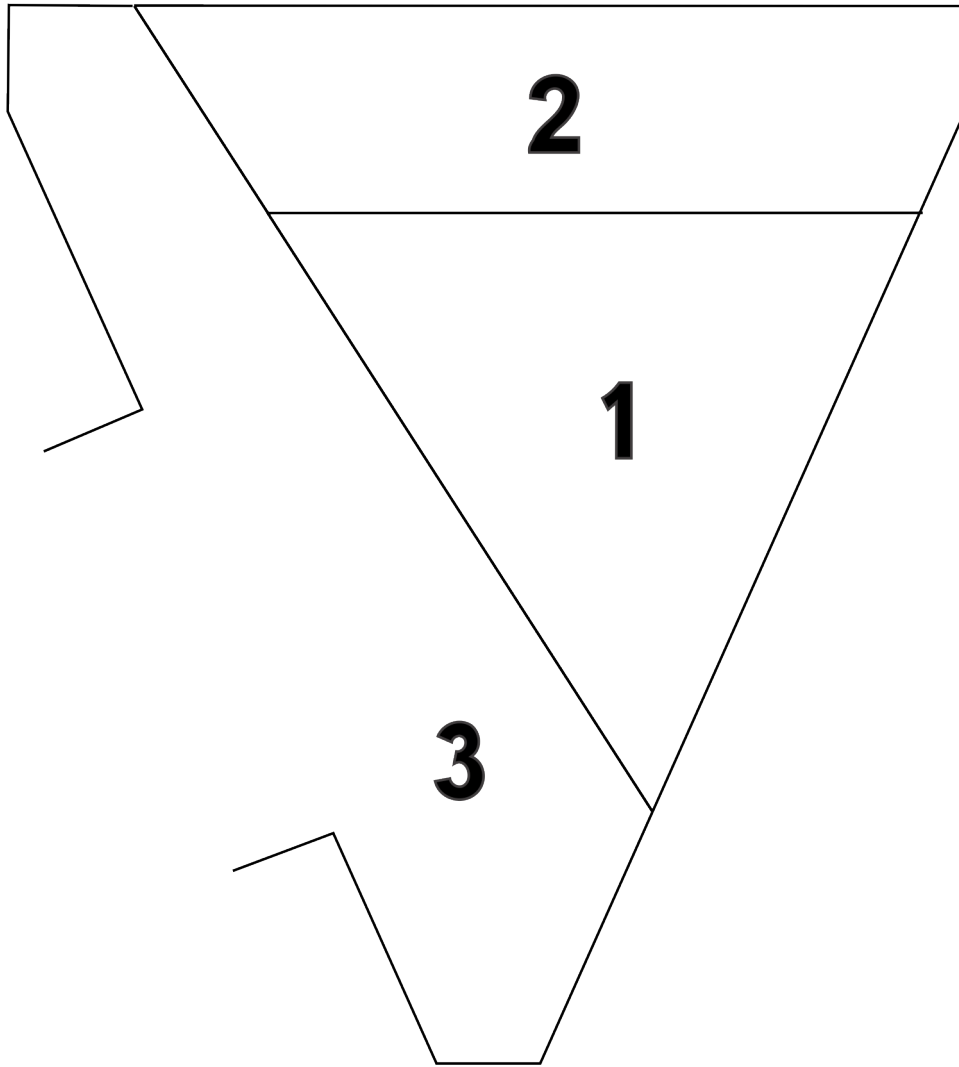


12624-07

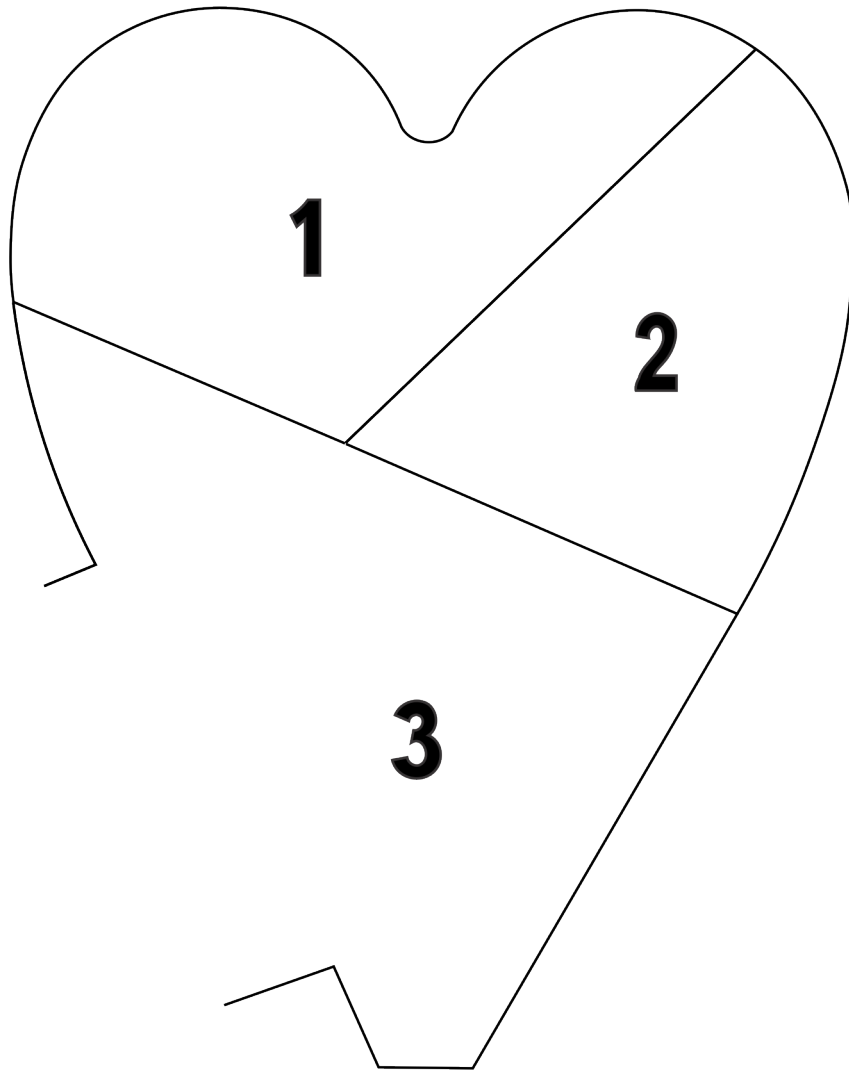

12624-10

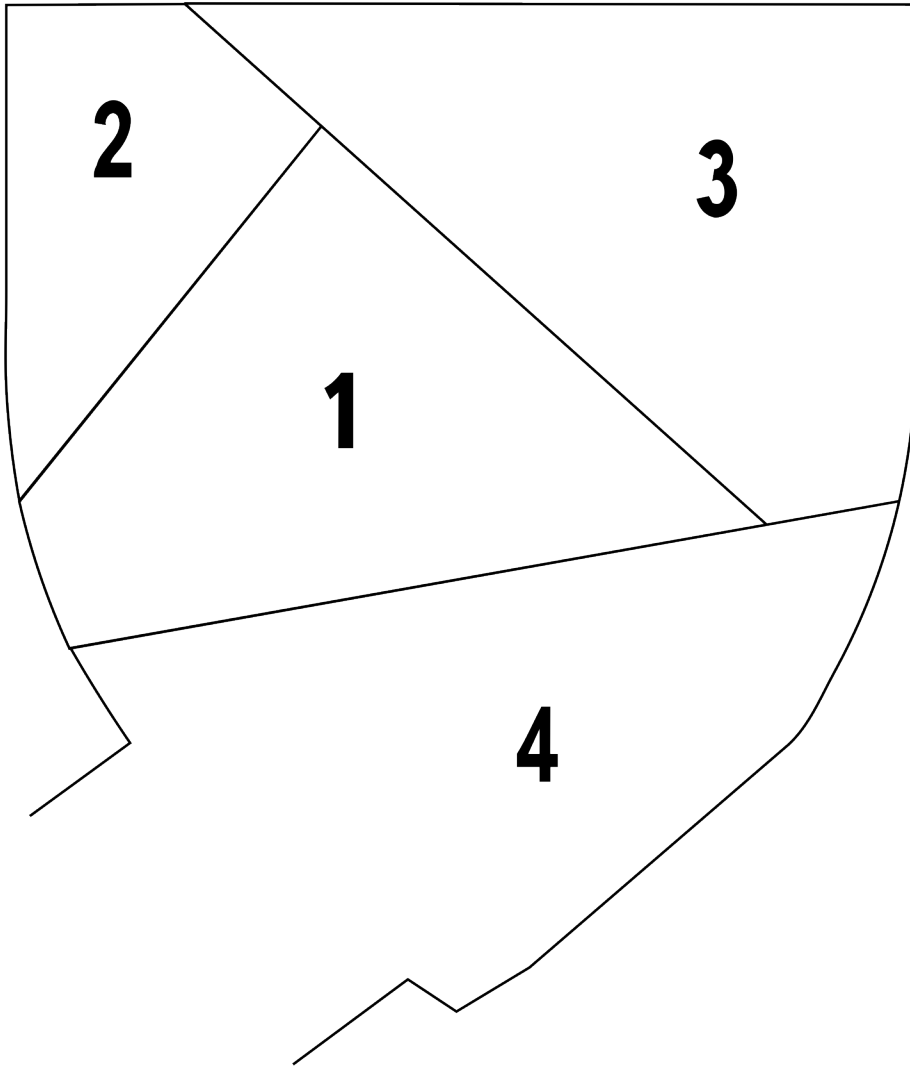

12624-13

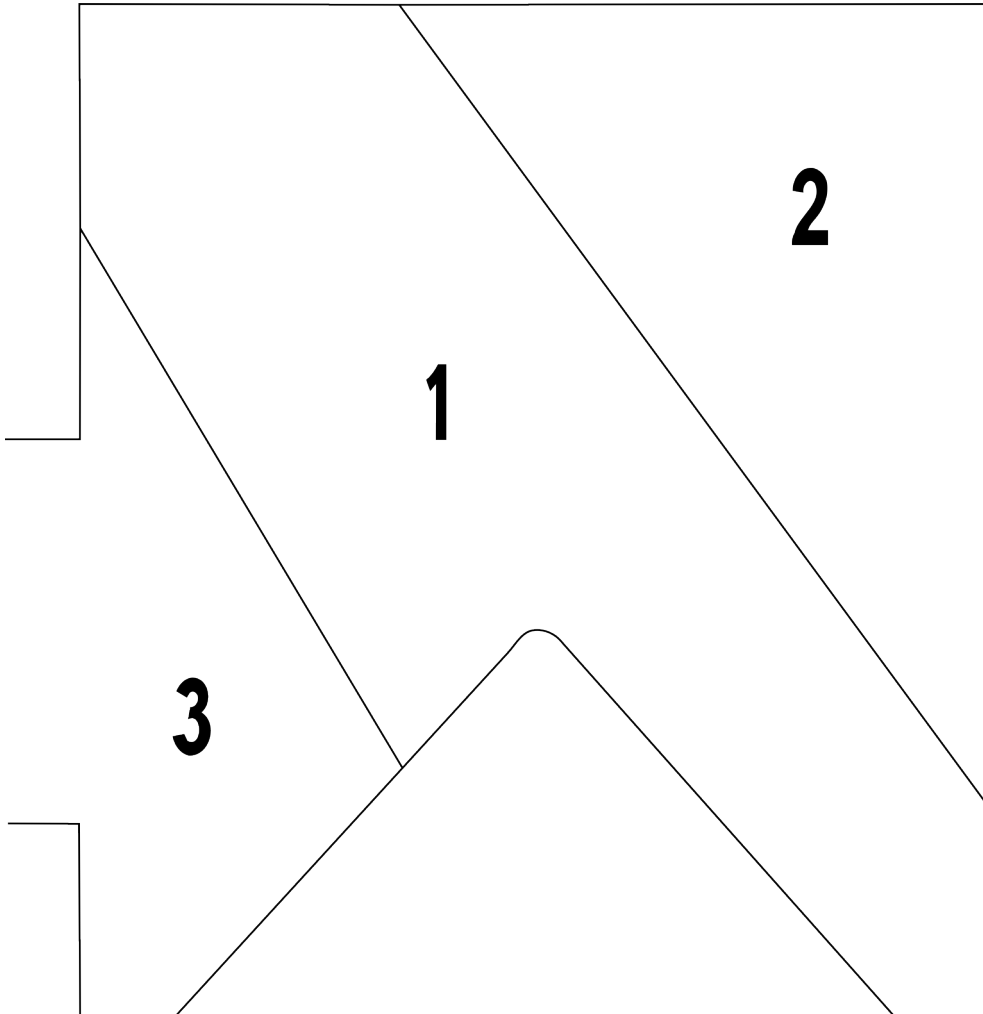

12624-16

