

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.



12677-01 Camper Appliqué

4.81 X 4.73 in.
122.17 X 120.14 mm
13,213 St.



12677-02 Van Appliqué

4.59 X 4.53 in.
116.59 X 115.06 mm
12,327 St.



12677-03 Tent Appliqué

5.83 X 4.11 in.
148.08 X 104.39 mm
8,045 St.

Listings below indicate color sample, stitching order and suggested thread color number. Most numbers indicate Isacord thread. Colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

12677-01 Camper Appliqué

- 1. Camper Front Placement Stitch 2520
- 2. Camper Front Cut Line and Tackdown.....2520
- 3. Camper Top Placement Stitch..... 2520
- 4. Camper Top Cut Line and Tackdown 2520
- 5. Camper Bottom Placement Stitch 2520
- 6. Camper Bottom Cut Line and Tackdown..... 2520
- 7. Door Placement Stitch 2520
- 8. Door Cut Line and Tackdown 2520
- 9. Fender Placement Stitch..... 2520
- 10. Fender Cut Line and Tackdown 2520
- 11. Tire Placement Stitch 2520
- 12. Tire Cut Line and Tackdown..... 2520
- 13. Window Placement Stitch 2520
- 14. Window Cut Line and Tackdown 2520
- 15. Rose Detail..... 2520
- 16. Tire Cover Stitch and Gray Detail 0108
- 17. White Detail..... 0015
- 18. Bird..... 0741
- 19. Camper Cover Stitch..... 4111
- 20. Fender Cover Stitch and Orange Detail 0824

12677-02 Van Appliqué

- 1. Tire Placement Stitch 0015
- 2. Tire Cut Line and Tackdown..... 0015
- 3. Cab Top Placement Stitch..... 0015
- 4. Cab Top Cut Line and Tackdown 0015
- 5. Window Placement Stitch..... 0015
- 6. Window Cut Line and Tackdown 0015
- 7. Cab Bottom Placement Stitch 0015
- 8. Cab Bottom Cut Line and Tackdown..... 0015
- 9. Bumper Placement Stitch..... 0015
- 10. Bumper Cut Line and Tackdown 0015
- 11. HeadLights and White Detail..... 0015
- 12. Light Gray Cover Stitch and Detail..... 0145
- 13. Wipers 0132
- 14. Dark Gray Cover Stitch 0108
- 15. Emblem and Blinkers 0811

12677-03 Tent Appliqué

- 1. Tent Opening Placement Stitch..... 0108
- 2. Tent Opening Cut Line and Tackdown 0108
- 3. Side Placement Stitch..... 0108
- 4. Side Cut Line and Tackdown..... 0108
- 5. Front Placement Stitch..... 0108
- 6. Front Cut Line and Tackdown 0108
- 7. Top Placement Stitch 0108
- 8. Top Cut Line and Tackdown 0108
- 9. Opening Bottom Cover Stitch..... 0108
- 10. Zipper 5050
- 11. Bird..... 1010
- 12. Tent Opening Cover Stitch and Bird Detail..... 1332
- 13. Tent Cover Stitch..... 4610
- 14. Stakes and Lines..... 0132

Isacord Thread Colors Used in “Retro Appliqués”
Collection #12677


0015 White	0811 Candlelight	2520 Garden Rose
0108 Cobblestone	0824 Liberty Gold	4111 Turquoise
0132 Dark Pewter	1010 Toast	4610 Deep Aqua
0145 Skylight	1332 Harvest	5050 Luster
0741 Wheat		

Pre-Cut Appliqué Instructions

1. Print out the necessary pages from the PDF of the appliqué pattern(s).
2. Mark the right side of the pattern pieces so you'll know which direction to lay the pattern on the fabric.
3. Lightly spray the wrong side of the pattern pieces with temporary adhesive spray and allow it to set for a few minutes.
4. Place the pattern pieces on the right side of the fabric and carefully cut them out. **PHOTO 1**
5. Sew the placement stitch on your hooped fabric. **PHOTO 2**
6. With the paper still stuck to the right side of the appliqué fabric, spray the wrong side of the fabric with temporary spray adhesive.
7. Place the fabric inside the placement stitch, so that it completely covers the placement stitch and then remove the paper pattern. **PHOTO 3**
8. Sew the tackdown. **PHOTO 4**
9. Sew the remainder of the design and repeat for any remaining pieces. **PHOTO 5**


NOTE: The patterns are sized for the designs as they were made. If you resize the design, you will need to resize the pattern the same amount. You can print out the pattern at the normal size then copy it on a copy machine at the changed size. For example, resize the designs to 80%, resize the printed pattern to 80%.

TIP: When Printing the patterns, make sure that the “Fit to page” option is **UNCHECKED** in the Print Dialog Box. If this option is checked the printed patterns will not be actual size.

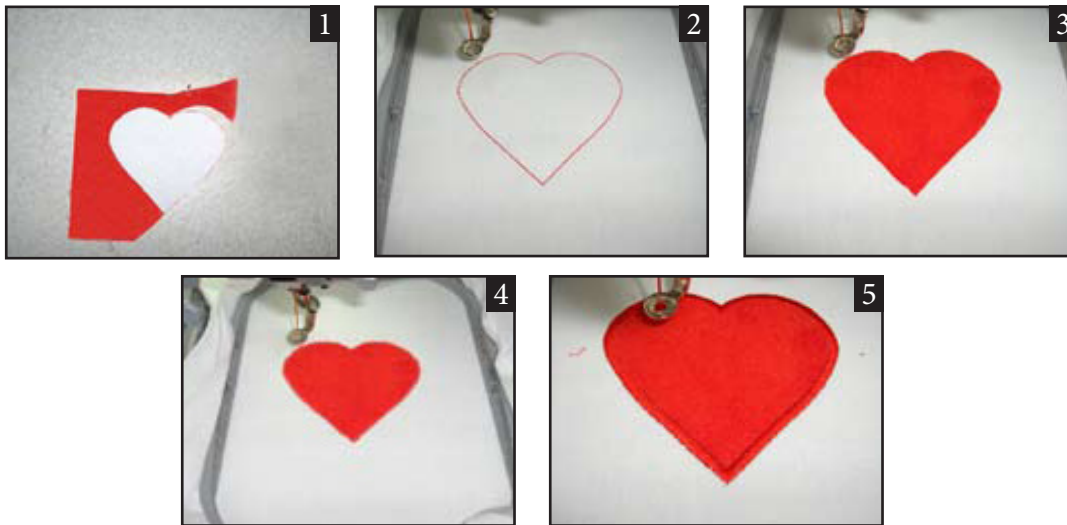


Cut-in-Place Appliqué Instructions

1. Hoop your fabric and backing.
2. Sew the placement stitch. **PHOTO 1**
3. Place a piece of appliqué fabric over the placement stitch so that it is completely covered.
4. Sew the cut line & tackdown.
5. Carefully cut away the excess appliqué fabric. **PHOTO 2**
6. Sew the remainder of the design and repeat for any remaining pieces. **PHOTO 3**

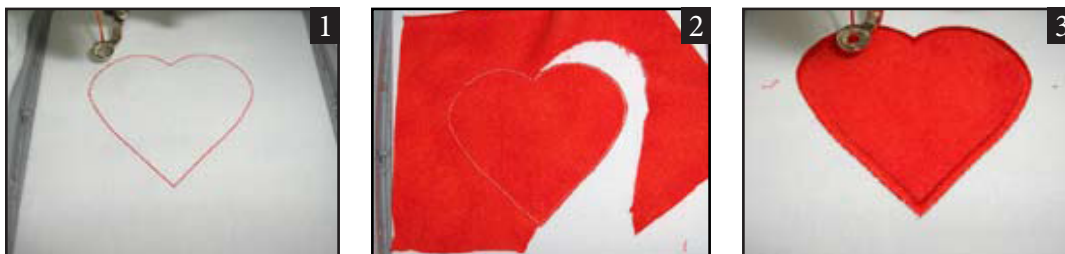

ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

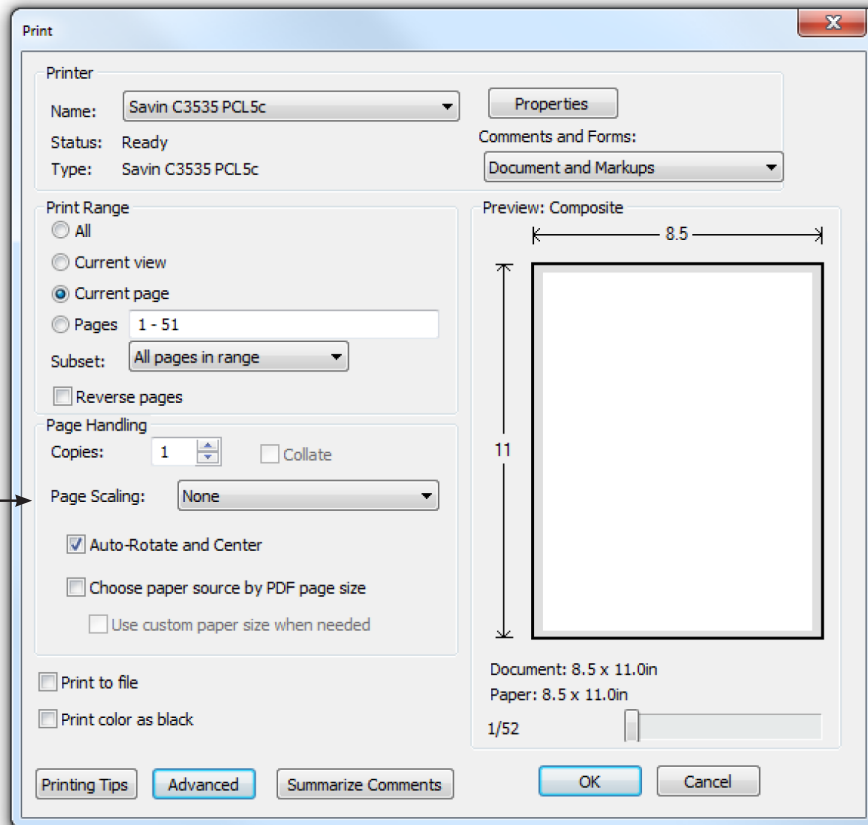

TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.

