







Isacord Thread Colors

0010 Silky White (2 spools) 0020 Black (2 spools) 1260 ISA TEXLIGHT (1 spool)

*Project instructions included after design list

DESIGNS

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

*Fabric Required



12892-01 Lace Web Pumpkin Section 1 FSA

	Size mm:	
6.79 X 4.35 in.	172.4 X 110.5 mm	42432 St.
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Oute	r Cover Stitch and Lace	0010
4. White Inner	Lace	0010
5. Black Inner	Detail	0020
6. Black Inner	Cover Stitch	0020
7. Glow Threa	d Detail	1260





*Fabric Required



12892-02 Lace Web Pumpkin Section 2 FSA

Size Inches:	Size mm:	Stitch Count:
6.79 X 4.35 in.	172.4 X 110.5 mm	37191 St.
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Oute	r Cover Stitch and Lace	0010
4. White Inner	Lace	0010
5. Black Inner	Detail	0020
6. Black Inner	Cover Stitch	0020
7. Glow Threa	nd Detail	1260

*Fabric Required




12892-03 Lace Web Pumpkin Section 3 FSA

Size Inches:	Size mm:	Stitch Count:
6.79 X 4.35 in. 1	172.4 X 110.5 mm	37124 St.
1. Gray Fabric	Placement Stitch	0010
2. Cut Line and	I Tackdown	0010
3. White Outer	Cover Stitch and Lace	0010
4. White Inner I	Lace	0010
5. Black Inner [Detail	0020
6. Black Inner (Cover Stitch	0020
7 Glow Thread	l Detail	1260






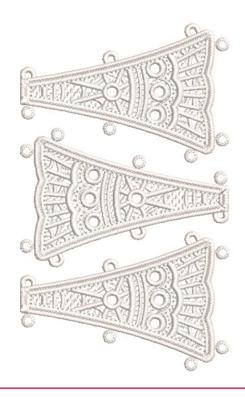

12892-04 Lace Web Pumpkin Stem FSL

Size Inches:	Size	mm:	Stitch Count:
5.96 X 3.59 in.	151.3 X	91.1 mm	34351 St.
1. White Lace			0010
2. Glow Threa	d Detail		1260

*Fabric Required

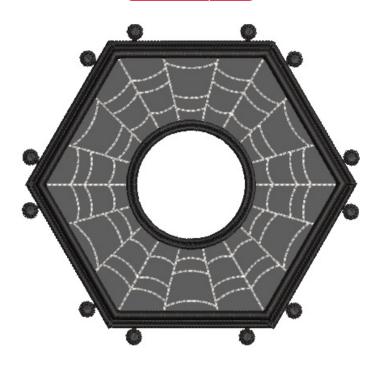

12892-05 Lace Web Pumpkin Base FSA

Size Inches:	Size mm:	Stitch Count:
4.64 X 4.87 in. 12	17.8 X 123.7 mm	13423 St.
1. Gray Fabric F	Placement Stitch	0020
2. Cut Line and	Tackdown	0020
3. Black Outer C	Cover Stitch and Lace	0020
4. White Detail		0010
5. Black Inner C	over Stitch	0020







12892-06 Lace Web Pumpkin Leaf FSL

Size Inches: 3.37 X 3.46 in.	Size mm: 85.6 X 87.8 mm	Stitch Count: 16737 St.
	d Detail	

*Fabric Required



12892-07 Scalloped Web Pumpkin FSA

Size Inches:	Size mm:	Stitch Count:
6.79 X 4.35 in. 1	72.4 X 110.5 mm	45050 St.
1. White Fabric	Placement Stitch	0010
2. Cut Line and	Tackdown	0010
3. White Outer	Cover Stitch and Lace	0010
4. Black Web D	etail	0020
5. Black Scallog	ped Detail	0020
6. Black Inner (Cover Stitch	0020
7 Glow Thread	l Detail	1260






*Fabric Required



12892-08 Scalloped Web Pumpkin Stem FSA

	Size mm: 163.4 X 96.1 mm	
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Web	Detail	0010
4. White Inner	Detail	0010
5. Black Cove	r Stitch and Lace	0020
☐ 6. Glow Threa	d Detail	1260

*Fabric Required

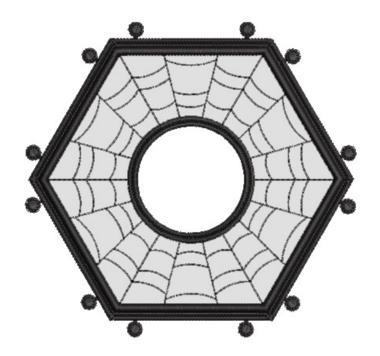

12892-09 Scalloped Web Pumpkin Base FSA

Size Inches: 4.64 X 4.87 in. 1	Size mm: 17.8 X 123.7 mm	
1. White Fabric		
2. Cut Line and		
3. Black Outer 0	Cover Stitch and Lace	90020
4. Black Web D	etail	0020
5 Black Inner (Cover Stitch	0020







12892-10 Scalloped Web Pumpkin Leaf FSL

Size Inches:	Size mm:	Stitch Count:
3.37 X 3.46 in.	85.6 X 87.8 mm	16841 St.
1. Black Lace.		0020
2. Glow Threa	d Detail	1260

*Fabric Required



12892-11 Spider Web Pumpkin Section 1 FSA

Size Inches:	Size mm:	Stitch Count:
5.12 X 3.40 in.	130.2 X 86.5 mm	14296 St.
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Oute	r Cover Stitch and Lace	0010
4. Glow Threa	d Web Detail	1260
5. Black Inner	Cover Stitch	0020
6. Glow Threa	d Detail	1260





*Fabric Required



12892-12 Spider Web Pumpkin Section 2 FSA

	Size mm: 130.2 X 86.5 mm	
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Outer	r Cover Stitch and Lac	e0010
4. Glow Threa	d Web Detail	1260
5. Black Inner	Cover Stitch	0020
6. Glow Threa	d Detail	1260

*Fabric Required




12892-13 Spider Web Pumpkin Section 3 FSA

Size Inches:	Size mm:	Stitch Count:
5.12 X 3.40 in.	130.2 X 86.5 mm	14594 St.
1. Gray Fabric	Placement Stitch	0010
2. Cut Line an	d Tackdown	0010
3. White Oute	r Cover Stitch and Lace	0010
4. Glow Threa	d Web Detail	1260
5. Black Inner	Cover Stitch	0020
6. Glow Threa	d Detail	1260






*Fabric Required

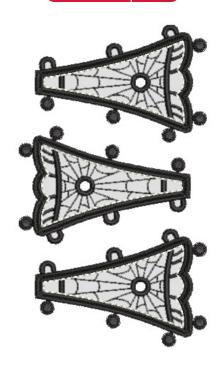

12892-14 Spider Web Pumpkin Stem FSA

Size Inches:	Size mm:	Stitch Count:
5.20 X 3.03 in.	132.1 X 77.0 mm	16342 St.
1. White Fabri	c Placement Stitch	0020
2. Cut Line an	d Tackdown	0020
3. Black Web	Detail	0020
4. Black Cove	r Stitch and Lace	0020
5. Glow Threa	d Detail	1260

*Fabric Required

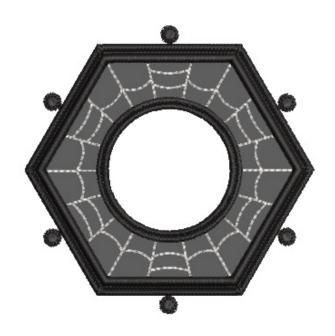

12892-15 Spider Web Pumpkin Base FSA

Size Inches:	Size mm:	Stitch Count:
3.71 X 3.73 in.	94.2 X 94.6 mm	10346 St.
1. Gray Fabric	Placement Stitch	0020
2. Cut Line an	d Tackdown	0020
3. Black Outer	Cover Stitch and Lace	9 0020
4. White Web	Detail	0010
5. Black Inner	Cover Stitch	0020







12892-16 Spider Web Pumpkin Leaf FSL

Size Inches:	Size mm:	Stitch Count:
3.00 X 3.09 in.	76.2 X 78.4 mm	13390 St.
1. Black Lace.		0020
2. Glow Threa	d Detail	1260



12892-17 Glow-In-The-Dark Spider FSL

Size Inches:	Size mm:	Stitch Count:
3.93 X 3.50 in.	99.8 X 88.8 mm	13074 St.
1. Glow Threa	d Single Color Design	1260

COLLECTION SUPPLIES



Stabilizers

- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway

Fabrics/Textiles

- · Gray fabric 1 yard
- White fabric- ½ yard
- Large sections 4 ½" x 7 ½" applique fabric
- Small sections 4" x 6" applique fabric
- Large base 6" x 5" applique fabric
- Small base 5" x 4" applique fabric
- Large stem 4" x 7" applique fabric
- Small stem 3" x 6" applique fabric
- Note: Fabric sizes are estimates and may result in overage.

Notions & Tools

- OESD Alligator Clamps
- OESD Button Clips
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Punch Tool
- OESD Perfect Embroidery Press Cloth
- Needle: 80/12 recommended for glow thread 1260

Isacord Thread Colors


- · Per thread chart
- Match bobbin thread to top thread







Completed Size: 8" W x 7" D x 8" H

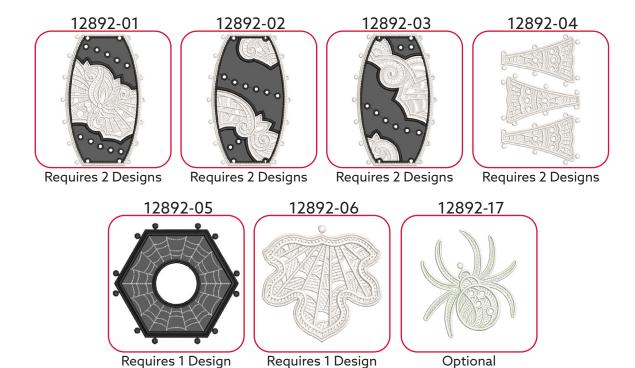









Completed Size: $8 \frac{1}{4}$ " W x $7 \frac{1}{4}$ " D x $8 \frac{1}{4}$ " H

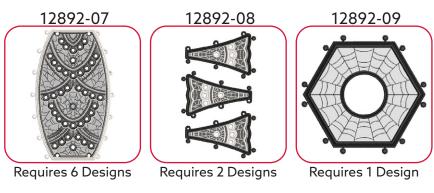

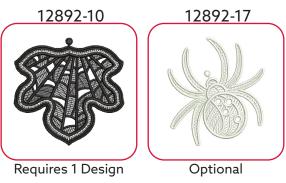








Completed Size: $6 \frac{1}{4}$ " W x $5 \frac{3}{4}$ "D x $6 \frac{1}{4}$ " H

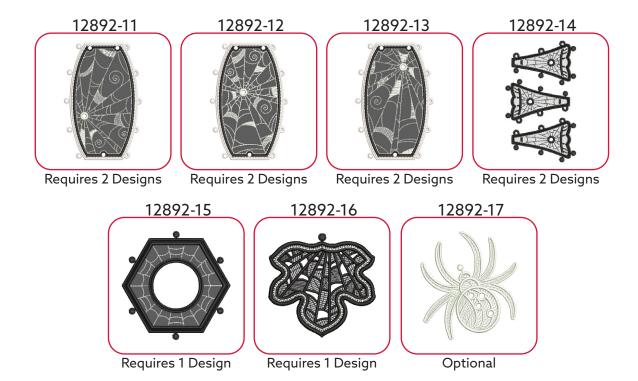

EMBROIDERY



NOTE

- The project includes freestanding applique designs and freestanding lace designs. All applique designs are stitched the same as shown in the instructions.
- The freestanding Lace Web Pumpkin is shown in the instructions.
- All designs are stitched with matching thread in the top and bobbin.
- Designs 12892-04, 12892-06, 12892-10, 12892-16, 12892-17 are freestanding lace. Follow the General Lace Instructions for these designs.

STEP 1

 Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.



STEP 2

- Adhere two layers of StabilStick CutAway to the wrong side of all applique fabrics to provide stiffness to the finished structure.
- Note: Each pumpkin requires six sections, six stems and one base.



EMBROIDERY



STEP 3

• Stitch Machine Step 1, Gray Fabric Placement Stitch.



STEP 4

- Remove the hoop from the machine, but NOT the project from the hoop. Lay the hoop on a flat surface.
- Cut a piece of prepared fabric slightly larger than the placement line.
- Cover the placement line completely with the prepared fabric.
- Tape in place to secure.



STEP 5

- · Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.



EMBROIDERY



STEP 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line stitching as possible. If the outermost stitches are cut, the inner stitches will still hold the applique in place.
- Tip: If the AquaMesh is cut or a hole is created while trimming the fabric, use Expert Embroidery Tape WashAway as a patch.



STEP 7

- Return the hoop to the machine and stitch the remaining machine steps according to the thread chart.
- Remember to match the bobbin thread to the upper thread colors.



STEP 8

• When design is complete, remove the project from the hoop and trim the stabilizer 1/4"- 1/2" outside the design.





STEP 1

- Rinse each piece in warm running water until the design is only slightly tacky.
- Lay face down on a non-stick surface to dry. Parchment paper or a cooling rack work well. This prevents the piece from curling.



STEP 2


· Press each piece, right side down, on a Perfect Embroidery Press Cloth.



STEP 3

• Insert the 3 mm attachment into the Perfect Punch Tool and punch holes in the eyelets indicated in the Punch tool guides located on pg. 23-24.

 Note: Section 12892-07 uses the 3mm and 4mm punch tool attachment.

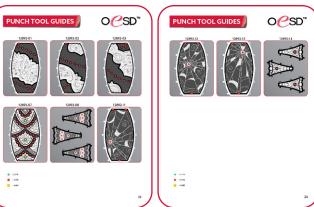



STEP 4

- With the right side facing up, attach Lace Web Pumpkin Center FSA (12892-01) to Lace Web Pumpkin Stem FSL (12892-04) pulling the buttonettes through the eyelets using alligator clamps.
- Repeat this process for the remaining pumpkin sections and stems.



STEP 5


• Arrange the pumpkin sections so they are in order 01, 02, 03, 01, 02, 03.





STEP 6

- Attach the bottom of each section to the Lace Web Pumpkin Base FSA (12892-05) by inserting
 the buttonettes from the base into the eyelets of the pumpkin section.
- NOTE For lace pumpkins, make sure the base fabric faces to the inside and vice versa for applique pumpkins.

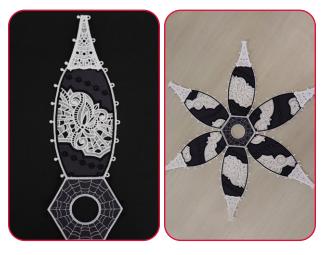

STEP 7

• Once the sections are attached to the base, attach each neighboring section.










STEP 8

- When the sections are completely attached, attach each stem to its neighbor.
- · Leave one stem unattached to be able to insert the spider and the leaf.

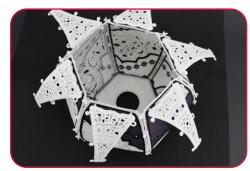





STEP 9

• Pull the buttonette on the Glow-In-The-Dark Spider FSL (12892-17) through any of the eyelets provided in the stem or the actual pumpkin section.







STEP 10

- Attach Lace Web Pumpkin Leaf FSL (12892-06) by pulling the buttonette through one of the eyelets in the middle of a stem.
- Pull the remaining buttonettes of the final stem through the eyelets on either side.
- Add tea lights or pixie lights to create a glow.



PUNCH TOOL GUIDES



12892-01




12892-02




12892-03



12892-07

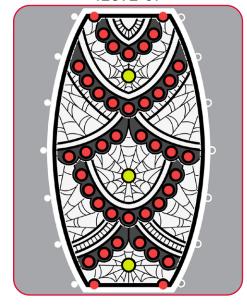

12892-08

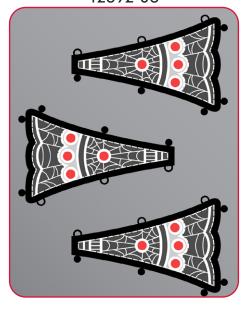


= 2 MM

= 3 MM


= 4 MM


PUNCH TOOL GUIDES



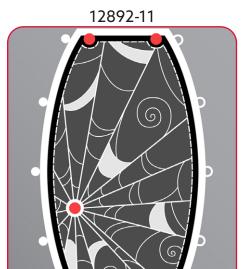



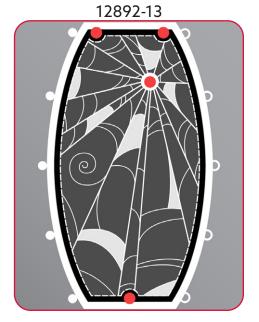

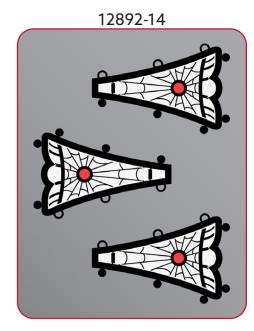


= 2 MM = 3 MM = 4 MM

PRINTING INSTRUCTIONS




ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

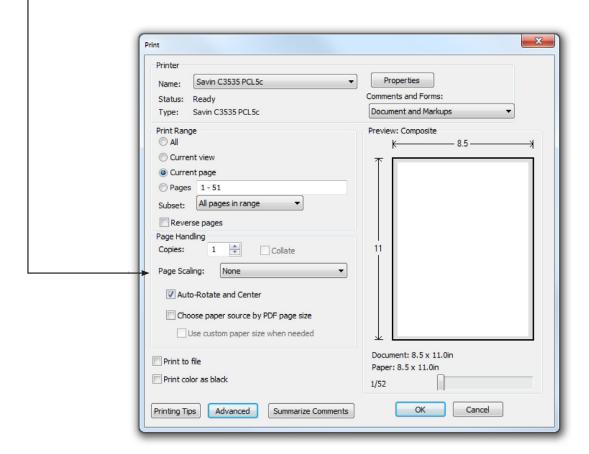

TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.



GENERAL FREESTANDING LACE GUIDE



Stabilizer

- OESD AquaMesh
- OESD BadgeMaster

Notions/Tools

- 80/12 Embroidery
 Ballpoint Titanium needle
 for extended needle life
- OESD Alligator Clamps
- OESD Button Clips
- OESD Perfect Point and Press Tool

Isacord Thread Colors

- All OESD designs are digitized with Isacord 40 wt. polyester thread as the top thread and in the bobbin.
- Refer to the thread chart for color specifications.
- Match bobbin thread color to the top thread.

Instructions

Step 1 - Hoop

For FSL structures, hoop one layer of OESD AquaMesh and one layer of OESD BadgeMaster. BadgeMaster contains more starch so, combined with the AquaMesh, the lace is more rigid. For other FSL, where a softer lace is desired, hoop two layers of AquaMesh.

Step 2 - Embroider

Stitch the design per the thread chart with matching thread in the bobbin at each color change.

When complete, remove from the hoop and trim away excess stabilizer about 1/4"-1/2" from the stitching.

Step 3 - Rinse

Rinse remaining stabilizer out in warm running water.

For stiffer lace and FSL structures, DO NOT rinse away all of the stabilizer. The lace should be just slightly tacky. For softer lace, rinse until all traces of the stabilizer are removed.

Step 4 - Dry

Lay right side down flat on a nonstick surface, such as a cooling rack, parchment paper or Teflon sheet. This minimizes the tendency for the lace to curl.

Let the pieces dry completely before proceeding with any assembly.

Step 5 - Press

Once completely dry, press right side down on a OESD Perfect Embroidery Press Cloth.

Step 6 - Assemble Structure

Note: Specific assembly instructions for a design/collection may be found in the thread chart pdf following the individual design color charts.

Lace must be COMPLETELY DRY before assembly. Wetting the buttonettes or eyelets to assemble is not recommended and may result in them stretching and coming "unbuttoned" when dry.

Use a pair of OESD Alligator Clamps to insert the buttonettes into the eyelets. Insert the tip of the OESD Alligator Clamps into the eyelet, grasp the buttonette and pull through the eyelet. Alternatively, use a stiletto or tweezers to push the buttonette through the eyelet.

Helpful Tips

Limp Lace

If the design is not stiff enough, press the lace pieces on the wrong side while applying spray starch. After ironing, spray again with starch and allow to dry completely. This will stiffen the lace pieces nicely and aid in construction. Or easily restiffen by diluting some stabilizer scraps in water (or use liquid starch) and dipping the item in the solution. Lay flat to dry.

Eyelets Too Small

If any of the eyelets appear closed or too small to penetrate with Alligator Clamps, they may be stretched by inserting the small end of the OESD Perfect Point and Press Tool into the eyelet opening and stretching it open wide enough to accommodate the OESD Alligator Clamps.

Button Clips

During the assembly process, some structures pull on buttonettes that have already been inserted and could pull them out altogether. Putting a Button Clip on the assembled buttonette will keep it in position during the assembly process. Remove the Button Clips when the assembly is complete.

Alternative Construction Option

In some cases, the buttonettes may be pulled to the inside of a project, instead of being visible on the outside. Insert the OESD Alligator Clamps through the eyelet from the wrong, or inside, of the lace and grasp the corresponding buttonette. Pull the buttonette to the wrong side of the lace.

Pulling the buttonettes to the inside may cause stress on the ones already done. Button clips may be placed on the completed buttonette(s) to prevent them from pulling out of the eyelet during construction.



