

6 Designs Collection No. 12915 6 Designs Project instructions included

-

+Y

CORD KEEPERS

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2022 OESD, LLC. All rights reserved.





Isacord Thread Colors

0010 Silky White 0020 Black 0131 Smoke 0134 Smoky 0605 Daisy 0640 Parchment 0703 Orange Peel 0704 Gold 0822 Palomino

- 0904 Spanish Gold
 1055 Bark
 1123 Caramel Cream
 1300 Tangerine
 1720 Not Quite Red
 1725 Terra Cotta
 1800 Wildfire
 2530 Rose
 2910 Grape
- 2912 Sugar Plum
 3830 Surfs Up
 4103 California Blue
 4620 Jade
 4643 Amazon
 5230 Bottle Green
 5513 Ming
 5515 Kelly
 5730 Apple Green

* Project instructions included after design list.

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

TABLE OF CONTENTS

Interactive Menu

Click to navigate to section.

Designs	3
Collection Supplies	6
Embroidery	7
Assembly	11
Applique Patterns	15
Mirrored Patterns	20





Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

*Fabric Required



12915-01 Flower Cord Keeper FSA

			Stitch Count:
4.73 X 4.86 in.	120.2 X	123.4 mm	9235 St.
1. Front Cork	Placement	Stitch	
2. Orange Det	ail		0904
3. Red Detail.			
💻 4. Light Red D	etail		1720
5. Yellow Deta	il		0703
6. Green Deta	il		5513
7. Light Green	Detail		5730
8. Back Cork I	Placement S	Stitch	5730
9. Tackdown			5730
10. Buttonhole			0703



12915-02 Rainbow Cord Keeper FSA

Size Inches:	Size mm:	Stitch Count:
5.02 X 4.71 in.	127.5 X 119.6 mm	9755 St.
1. Front Vinyl	Placement Stitch	4103
3. Green Deta	il	5515
4. Yellow Deta	ull	
	ail	
6. Red Detail.		1800
7. Purple Deta	uil	2910
8. Back Vinyl I	Placement Stitch	2910
9. Tackdown		0020
10. Buttonhole		0020

DESIGNS




Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

*Fabric Required

12915-03 Plaid Cord Keeper FSA

Size Inches: 4.78 X 3.89 in.	Size mm: 121.3 X 98.9 mm	
 2. Light Blue E 3. Dark Blue E 4. White Detai 5. Tan Detail 6. Brown Deta 	Placement Stitch Detail I il Placement Stitch	
		-





12915-04 Cat Cord Keeper FSA

Size Inches:	Size mm:	Stitch Count:
6.22 X 4.29 in.	158.1 X 108.9 mm	9330 St.
 Yellow Deta Brown Deta Back Cork F Tackdown 	Placement Stitch il il Placement Stitch	

DESIGNS



Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

*Fabric Required



12915-05 Mountain Cord Keeper FSA

Size Inches:	Size mm:	Stitch Count:
5.05 X 4.74 in.	128.3 X 120.3 mm	16453 St.
1. Front Vinyl	Placement Stitch	4620
2. Blue Detail		4620
3. Gray Detail		0131
4. Dark Gray	Detail	0134
5. White Deta	il	0010
6. Back Vinyl	Placement Stitch	4620
7. Tackdown .		4620
8. Buttonhole		0131

*Fabric Required



12915-06 Houses Cord Keeper FSA

Size Inches: 5.64 X 4.66 in.	Size mm: 143.2 X 118.4 mm	
 Front Vinyl Purple Detail Blue Detail Gold Detail Red Detail. Brown Detail 	Placement Stitch il il Placement Stitch	
8. Tackdown		2530

COLLECTION SUPPLIES



Stabilizers

- OESD Light Weight TearAway
- OESD Applique Fuse and Fix

Fabrics/Textiles

OESD Luxe Sparkle Vinyl (or cork)

- 12915-01 (2) 6" x 6"
- 12915-02 (2) 6" x 6"
- 12915-03 (2) 6" x 5"
- 12915-04 (2) 7" x 5 ¹/₂"
- 12915-05 (2) 6" x 6"
- 12915-06 (2) 6" x 6"

Notions & Tools

- OESD Perfect Punch Tool with 2mm tip
- 2 Plastic snaps
- Craft knife

Isacord Thread Colors


Per thread chart



Notes

Press the Applique Fuse and Fix to the wrong side of each piece of OESD Luxe Sparkle Vinyl. Tip: Press with a medium iron for 10-15 seconds for a secure fuse.

Set aside.

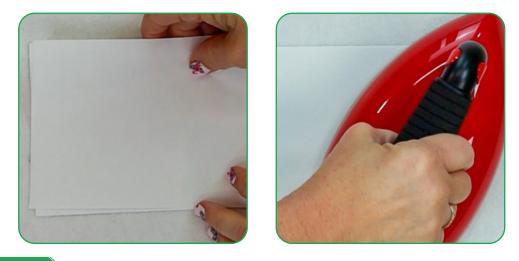

STEP 1


- Hoop 1 layer of Light Weight TearAway.
- Load selected design into the machine.
- Example design is 12915-02.
- Thread the machine per the thread chart.
- Place hoop on the machine.






STEP 2

- Stitch Machine Step 1, Front Vinyl Placement Stitch.
- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.



STEP 3

- With a pin, score the back of one prepped piece of Luxe Sparkle Vinyl and remove the paper.
- Place the prepared Luxe Sparkle Vinyl right side up, completely covering the placement stitch.
- Finger press to secure.
- Return the hoop to the machine.





• Stitch machine steps 2-7 per the thread chart.





STEP 5

• Stitch Machine Step 8, Back Vinyl Placement Stitch.



STEP 6

- STOP!
- Remove the hoop from the machine, but NOT the project from the hoop.
- With a pin, score the back of the second prepped piece of Luxe Sparkle Vinyl and remove the paper.
- Turn the hoop over and position the Luxe Sparkle Vinyl, right side up, completely covering the placement stitch.
- Gently finger press. Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.
- Turn hoop right side up and set on a flat surface.
- Finger press on the design to firmly adhere the back to the stabilizer.
- Return the hoop to the machine.





STEP 7

- Thread the machine per the thread chart.
- Stitch Machine Step 9, Tackdown Stitch.



STEP 8

• Stitch Machine Step 10, Buttonhole.



ASSEMBLY



STEP 9

- Remove the hoop from the machine and the project from the hoop.
- With a sharp pair of scissors, trim just inside the outer tackdown stitch





• Use a craft knife to slice open the buttonhole.





• Using the OESD Perfect Punch Tool fitted with the 2mm tip, punch out the eyelets in the center of each circle.







• Attach the snaps within the center of each circle, following manufacturer's instructions.



STEP 13

- Thread the phone cord through the buttonhole, wrap the cord keeper around the cord and snap together.
- The project is complete. Enjoy!




PUNCH TOOL GUIDES



12915-03

12915-01


12915-02

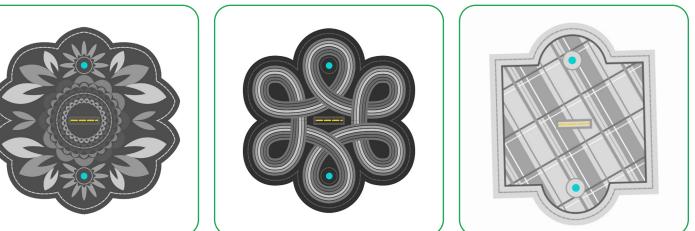

12915-04

12915-05

12915-06









PRINTING INSTRUCTIONS



ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

Printer	
Name: Savin C3535 PCL5c	✓ Properties
Status: Ready	Comments and Forms:
Type: Savin C3535 PCL5c	Document and Markups 🔹
Print Range	Preview: Composite
Current view	
Current page	\uparrow
© Pages 1-51	
Subset: All pages in range	
Reverse pages	
Page Handling	
Copies: 1 Collate	11
Page Scaling: None 💌	
Auto-Rotate and Center	
Choose paper source by PDF page size	
Use custom paper size when needed	*
Print to file	Document: 8.5 x 11.0in
Print color as black	Paper: 8.5 x 11.0in
Print Color as Diack	1/52

TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.

Print Range	2
Current	t view
 Current 	t page 🖌
Pages	1 - 51
Subset:	All pages in range 🔹
Revers	e pages

