


Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

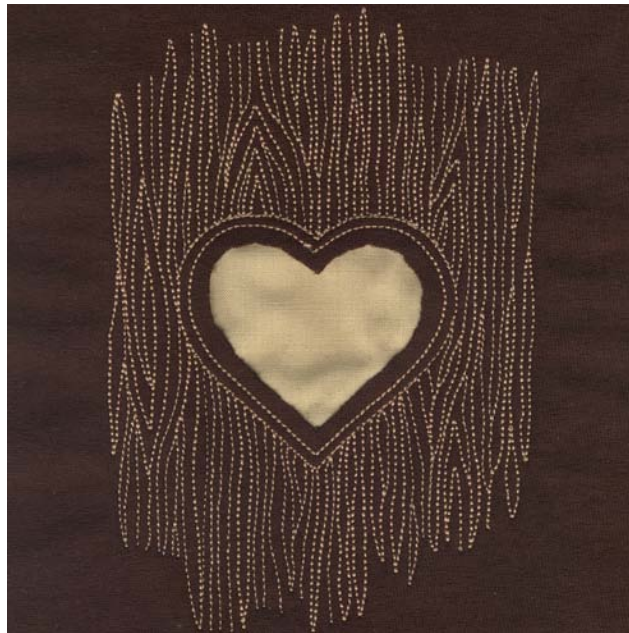


19999-007 Woodgrain Reverse
 Appliqué Heart
 4.36 X 6.56 in.
 110.74 X 166.62 mm
 9,668 St. ⚙️

⚙️ Design contains a loose fill.
 ⚙️ Some white areas shown are not stitched.

L Design is larger than 5" (127 mm) in either direction.
 S Design is smaller than 1.5" (38.1 mm) in either direction.

Listings below indicate color sample, stitching order and suggested thread color number. "I" refers to Isacord Thread and "T" refers to Timeless. Colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

	I	T
■ 1. Heart Placement Stitch	1123	20130
■ 2. Heart Tackdown & Cut Line.....	1123	20130
■ 3. Woodgrain Details.....	1123	20130

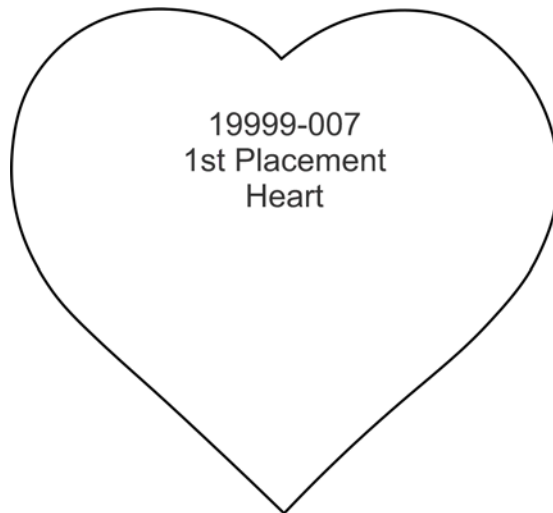

Reverse Appliqué Instructions

1. Hoop a double layer of Polymesh Cut-Away stabilizer in appropriate hoop.
2. Stitch the appliqué placement stitch. Be sure to use a color that will stand out on the stabilizer. **PHOTO 01**
3. Use provided patterns to cut out the appliqué piece. It is advisable to cut the appliqué just slightly larger than the pattern. Do this by cutting just outside the pattern line rather than directly on the pattern line. **PHOTO 02**
4. Remove hoop from machine but do not remove project from hoop. Spray the stabilizer lightly with temporary adhesive spray. Place the appliqué over the appliqué placement stitch. Be sure that the edges of the appliqué cover the appliqué placement stitch entirely. **PHOTO 03**
5. Lightly re-spray stabilizer and applique with temporary adhesive spray if needed. Adhere your garment or fabric to the hooped stabilizer with appliqué fabric already placed. **PHOTO 04**
6. Stitch remaining colors of the design. **PHOTO 05**
7. Remove the hoop from the machine and fabric from the hoop.
8. Carefully cut away only the top layer of fabric by cutting $\frac{1}{8}$ " from the sewn Tackdown/ Cut Line. **PHOTO 06**

NOTE: Design used in photographs is for instructional purposes only and may not be included in purchased collection.

