

Holiday Ornament and Card Reward

#32179
2 DESIGNS

MATERIALS



Isacord Thread Colors

0101 Eggshell
0800 Golden Rod
1600 Spanish Tile
1755 Hyacinth

1912 Winterberry
3030 Amethyst
4133 Deep Ocean
4752 Vintage Blue

5555 Deep Green
5743 Asparagus

*** Project instructions included after design list.**

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

DESIGNS












Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

FABRIC REQUIRED



32179-01 Star Ornament FSA

Size Inches: 4.06 X 3.92 in. Size mm: 103.1 X 99.5 mm Stitch Count: 9556 St.

	1. Blue Fabric Placement Stitch	0101
	2. Cut Line and Tackdown	0101
	3. White Detail	0101
	4. Purple Detail	3030
	5. Pink Detail	1755
	6. Red Detail	1600
	7. Blue Detail	4752
	8. Back Fabric Cut Line and Tackdown	0800
	9. Yellow Cover Stitch and Lace	0800

FABRIC REQUIRED



32179-02 Warm Wishes Card

Size Inches: 7.00 X 5.00 in. Size mm: 177.8 X 127.0 mm Stitch Count: 21816 St.

	1. Card Placement Guide	1600
	2. White Fabric Placement Stitch	1600
	3. Fabric Tackdown	1600
	4. Pink Door	1755
	5. Dark Blue Home Detail	4133
	6. Purple Detail	3030
	7. White Detail	0101
	8. Light Green Detail	4752
	9. Green Detail	5743
	10. Dark Green Detail	5555
	11. Dark Red Detail	1912
	12. Red Wreath and Home Detail	1600
	13. Yellow Berries	0800
	14. Red Lettering Detail	1600
	15. Dark Blue Lettering Detail	4133
	16. Yellow Stars	0800

MATERIALS-CARDS

Stabilizers

- OESD StabilStick TearAway
- OESD Fuse and Seal
- OESD Applique Fuse and Fix

Fabrics/Textiles

- OESD Start Here Greeting Cards, size A7 (5" x 7")
- White quilter's cotton 5" x 7"

Notion & Tools

- OESD Expert Embroidery Tape TearAway
- Embroidery Needle Sharp 75/11

Isacord Thread Colors

- Per thread chart

General Instructions

The greeting card instructions included in the design pack are general instructions for all the greeting card designs. For demonstration purposes, a sample design is used that best demonstrates the general technique. Fabric and thread requirements will vary by design, consult the templates at the end of the instructions for specific size requirements.

The sample design is 12905-16 from Home for the Holidays, Cards and Ornaments.

Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

Step 1

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Roughly cut out the template about a 1/4" from the outer edge.
- Following the package instructions, fuse the trimmed templates to the wrong side of the applique fabric with the printed template paper side up. Trim the prepared applique on the outer edge of the black outline. Set aside.
- Hoop one layer of StabilStick TearAway paper (shiny) side up.



EMBROIDERY



□ Step 2

- Use a pin or needle to score the paper.




□ Step 3

- Remove the paper to reveal the adhesive surface.
- Place hoop on the machine.



□ Step 4

- Thread the machine per thread chart.
- Stitch Machine Step 1, Card Placement Guide.
- Remove the hoop from the machine, but NOT the project from the hoop.

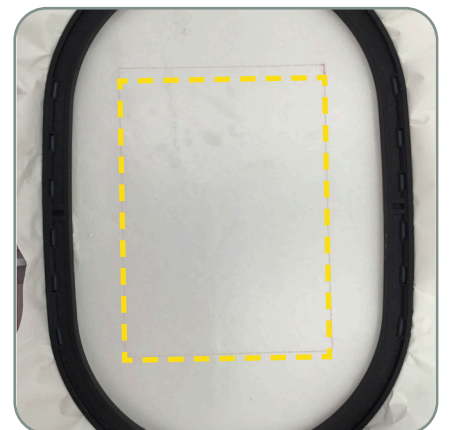

EMBROIDERY




□ Step 5

- Place the hoop on a flat surface.
- Place the front of the card face up within the placement stitch, lining up all edges.
- Gently finger press the card to secure to the adhesive surface.
- Return the hoop to the machine.



□ Step 6

- Stitch Machine Step 2, White Fabric Placement Stitch.
- Remove the hoop from the machine, but NOT the project from the hoop.

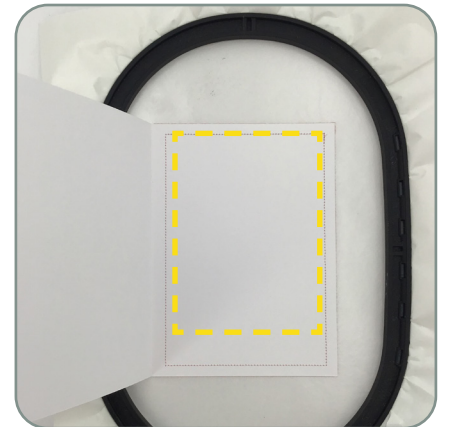

□ Step 7

- Use a pin or needle to score the paper on the template back.
- Remove the paper to reveal the adhesive surface.
- Position the fabric, sticky side down, within placement stitch, aligning all edges.
- Return the hoop to the machine.




EMBROIDERY



□ Step 8

- Thread the machine per the thread chart.
- Stitch Machine Step 3, Fabric Tackdown.

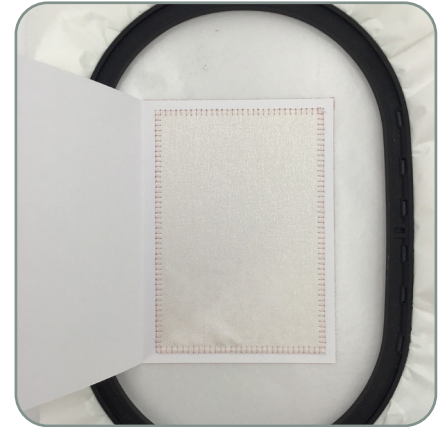

□ Step 9

- Stitch the remaining Machine Steps, per the thread chart.



□ Step 10

- Remove the card and stabilizer from the hoop. Place the card face down and fold the stabilizer towards the card. Carefully cut the stabilizer away, close to the stitching.
- Note: Cutting away the excess tearaway stabilizer will prevent creasing and bending the cardstock.



EMBROIDERY



□ Step 11

- Cut coordinating cardstock (or scrapbook paper) slightly smaller than the front of the card.
- Cut a piece of Fuse and Seal to fit.
- Following the package instructions, with a medium-warm iron, press the Fuse and Seal to the wrong side of the cardstock (scrapbook paper).
- Let cool.



□ Step 12

- Remove paper from Fuse and Seal, line up cardstock (scrapbook paper) over the backside of the card, and press to fuse.
- The card is complete.



MATERIALS- ORNAMENTS

Stabilizers

- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway

Fabrics/Textiles

- Navy blue quilter's cotton (2) 4" x 4"

Notion & Tools

- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Embroidery Press Cloth
- Embroidery Needles Sharp 75/11

Isacord Thread Colors

- Per thread chart

EMBROIDERY




□ Notes

- The freestanding applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.
- Design is stitched with matching thread, top and bobbin.
Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

□ Step 1

- Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.

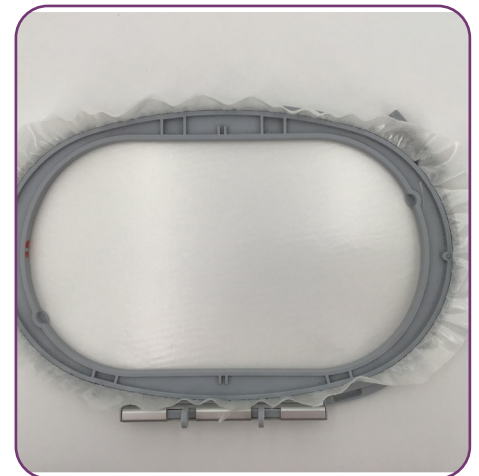

□ Step 2

- Adhere one layer of StabilStick CutAway to the wrong side of all applique fabrics (except the vinyl), to provide stiffness to the finished structure.
- Note: Since this is a double-sided applique only 1 layer per fabric is needed to provide stiffness to the structure.




EMBROIDERY




Step 3

- Load selected design into the machine.
- Example design is 12905-16.
- Thread the machine per the thread chart.
- Stitch Machine Step 1, White Fabric Placement Stitch.

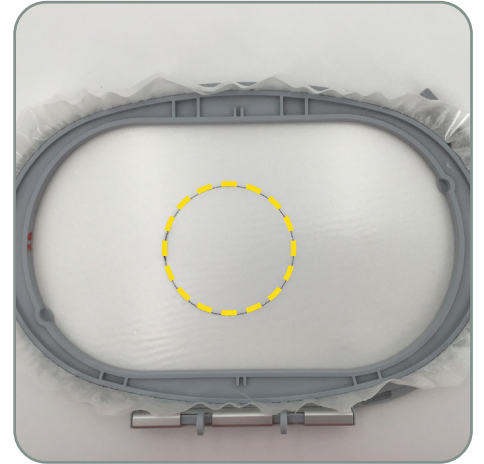


Step 4

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with one of the prepared applique fabrics.
- Tape in place to secure.

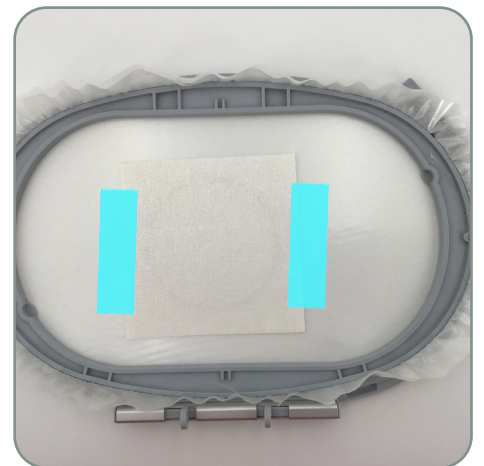

Step 5

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.

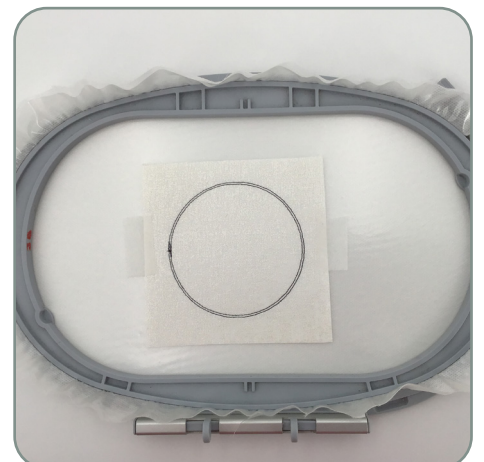


EMBROIDERY



□ Step 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.
- Tip: If the AquaMesh is cut or a hole is created while trimming the fabric, use OESD Expert Embroidery Tape WashAway as a patch.

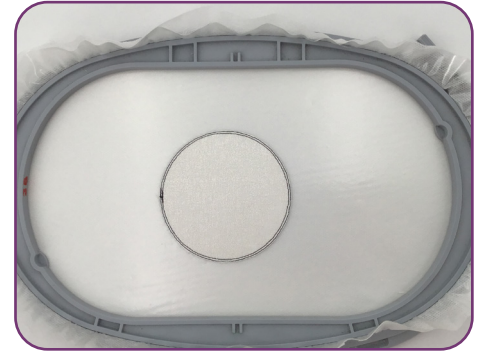

□ Step 7

- Return the hoop to the machine and stitch machine steps 3 and 4, according to the thread chart.
- STOP after machine step 4.



□ Step 8

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the OESD Clear Vinyl.
- Tape in place to secure.



EMBROIDERY




Step 9

- Turn the hoop over and place the remaining applique fabric, right side up, completely covering the placement stitch.
- Carefully tape to secure. Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.




Step 10

- Return the hoop to the machine.
- Stitch Machine Step 5, Front Vinyl/Back Fabric Cut Line and Tackdown.

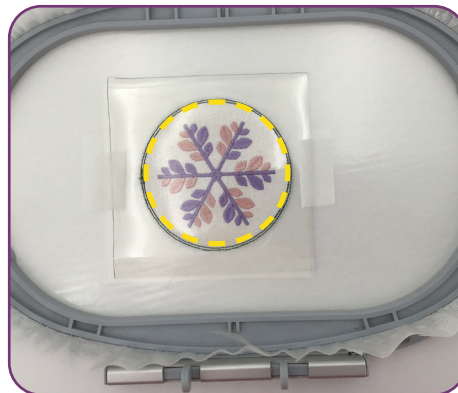

Step 11

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess vinyl as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.

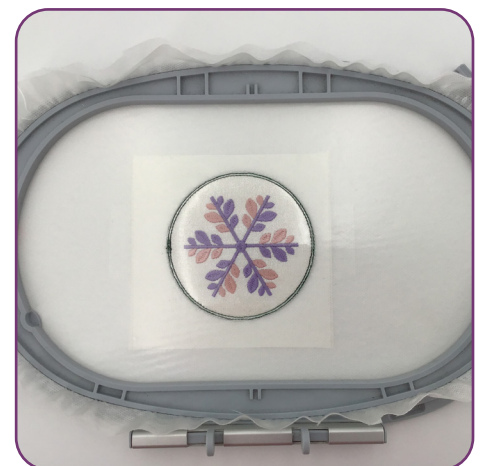

EMBROIDERY




□ Step 12

- Turn the hoop over and trim the excess fabric as close to the cut line as possible.



□ Step 13

- Return the hoop to the machine and stitch the remaining machine steps, according to the thread chart.
- Match the bobbin thread to the upper thread.

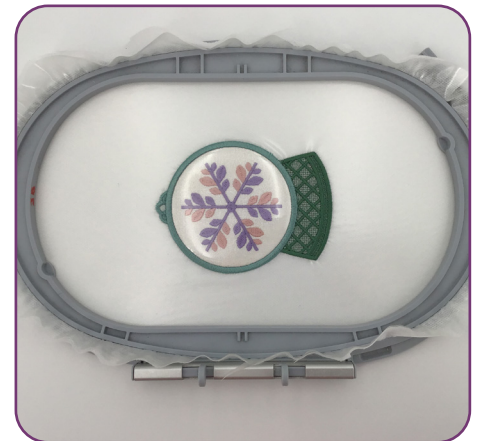

□ Step 14

- When the design is complete, remove the project from the hoop and trim the stabilizer 1/4" - 1/2" outside the design.



EMBROIDERY

□ Step 15

- Rinse each piece in warm running water until the design is only slightly tacky.
- Lay right side down on a non-stick surface to dry. Parchment paper or a cooling rack work well to prevent curling. Dry completely.



□ Step 16


- Once dry, press right side down on a Perfect Embroidery Press Cloth with a low temperature iron.
- Note: do not press directly on clear vinyl.



PRINTING INSTRUCTIONS OESD™


ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

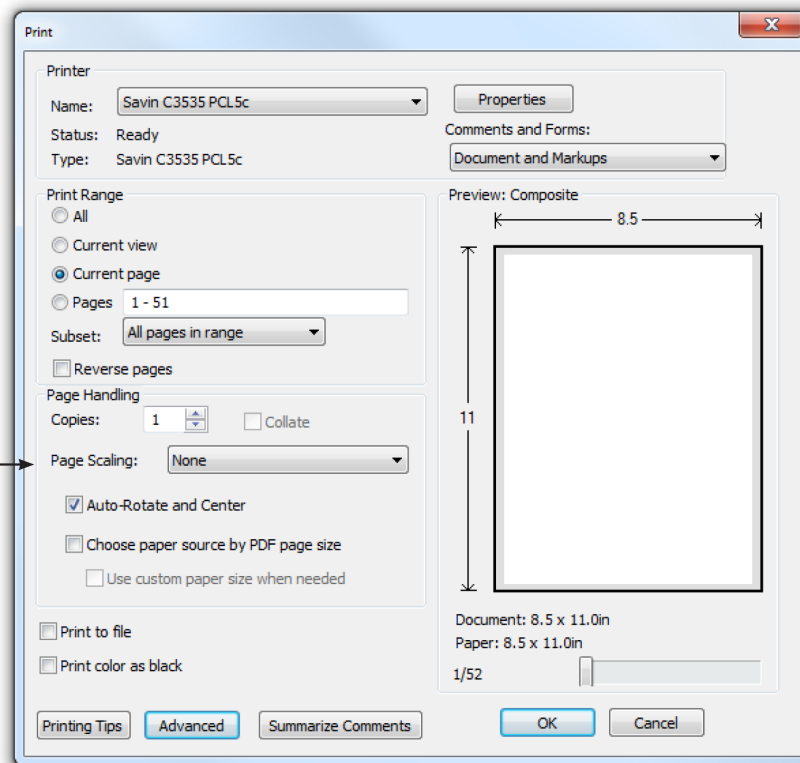

TO SAVE PAPER


Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.

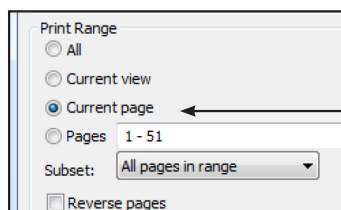

APPLIQUE PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

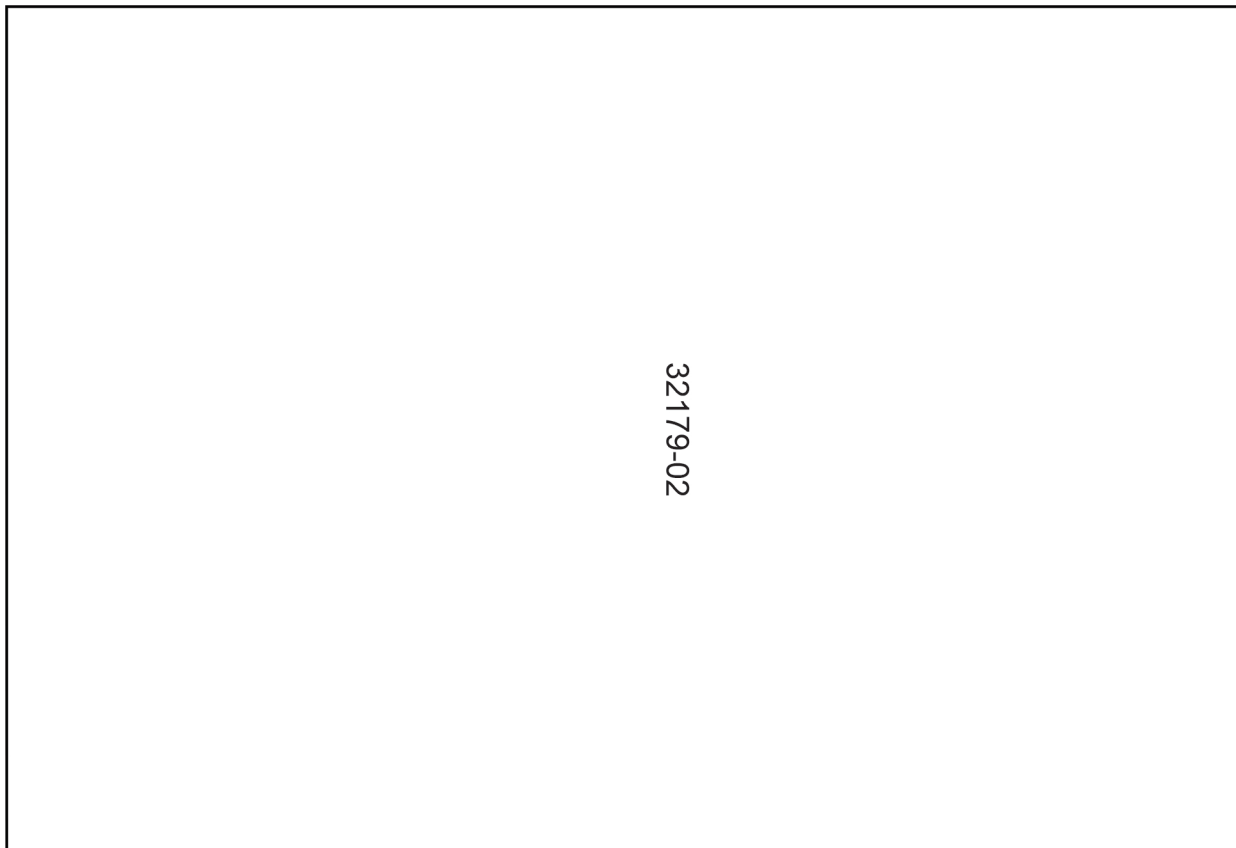

MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

