

Party Masks Reward

#32191

2 DESIGNS

MATERIALS



Isacord/Yenmet Thread Colors

0015 White
0020 Black
0605 Daisy
2900 Deep Purple
3030 Amethyst
7001 (S12) 24 kt. Gold
7005 (SN1) Silver

*** Project instructions included after design list.**

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

DESIGNS



Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

FABRIC REQUIRED



32192-01 Party Mask 1 FSA

Size Inches: Size mm: Stitch Count:
8.12 X 3.35 in. 206.2 X 85.0 mm 24831 St.

	1. Front Sparkle Vinyl Placement Stitch	3030
	2. Cut Line and Tackdown	3030
	3. Amethyst Detail	3030
	4. Yellow Detail	0605
	5. Gold Detail.....	7001
	6. Back Fabric Placement Stitch	2900
	7. Cut Line and Tackdown	2900
	8. Cover Stitch and Detail.....	2900
	9. Silver Detail	7005

FABRIC REQUIRED



32192-02 Party Mask 2 FSA

Size Inches: Size mm: Stitch Count:
8.10 X 3.43 in. 205.7 X 87.1 mm 23702 St.

	1. Front Sparkle Vinyl Placement Stitch	0605
	2. Cut Line and Tackdown	0605
	3. Yellow Detail	0605
	4. White Detail	0015
	5. Silver Detail	7005
	6. Back Fabric Placement Stitch	0020
	7. Cut Line and Tackdown	0020
	8. Cover Stitch and Detail	0020
	9. Gold Detail.....	7001

MATERIALS



Stabilizers

- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway

Fabrics/Textiles

- Mask 1
- Gray OESD Luxe Sparkle Vinyl (1) 9" x 4 1/2"
- Dark Gray quilter's cotton (1) 9" x 4 1/2"
- (2) 1/4" Ribbon 18"

- Mask 2
- Purple OESD Luxe Sparkle Vinyl (1) 9" x 4 1/2"
- Purple quilter's cotton (1) 9" x 4 1/2"
- (2) 1/4" Ribbon 18"
- Note: Fabric sizes are estimates and may result in overage.

Notion & Tools

- OESD Alligator Clamps
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Punch Tool
- OESD Perfect Embroidery Press Cloth
- OESD Grippy GRID
- Embroidery Needle Sharp Size 75/11

Isacord Thread Colors

- Per thread chart

General Instructions

The freestanding applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

All designs are stitched with matching thread, top and bobbin.

Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

Step 1

- Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.



Step 2

- Adhere one layer of StabilStick CutAway to the wrong side of all applique fabrics and Sparkle Vinyl, to provide stiffness to the finished mask.
- Note: Since this is a double-sided applique only one layer per vinyl or fabric is needed to provide stiffness to the mask.



EMBROIDERY



□ Step 3

- Load selected design into the machine.
- Example design is 32192-01.
- Thread the machine per the thread chart.
- Stitch Machine Step 1, Front Vinyl Placement Stitch.




□ Step 4

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared vinyl.
- Tape in place to secure.



□ Step 5

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.

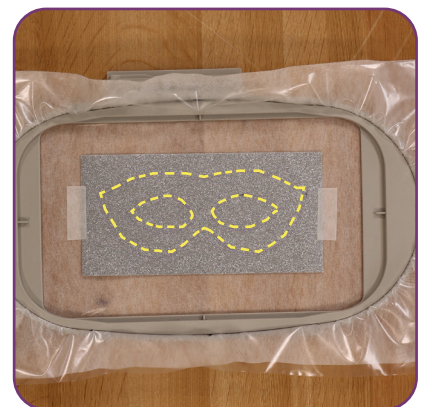

EMBROIDERY



Step 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess fabric as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.
- Tip: If the AquaMesh is cut or a hole is created while trimming the fabric, use OESD Expert Embroidery Tape WashAway as a patch.




Step 7

- Return the hoop to the machine and stitch machine steps 3-5, according to the thread chart.
- Match the bobbin thread to the background fabric throughout.



Step 8

- Stitch Machine Step 6, Back Fabric Placement Stitch.
- Remove the hoop from the machine, but NOT the project from the hoop.

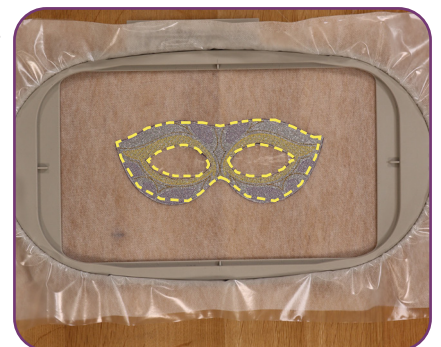

EMBROIDERY



Step 9

- Turn the hoop over and place the prepared fabric, right side up, completely covering the placement stitch.
- Carefully tape to secure. Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.



Step 10

- Return the hoop to the machine.
- Stitch Machine Step 7, Cut Line and Tackdown.



Step 11

- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over and trim the excess fabric as close to the cut line as possible.



EMBROIDERY



Step 12

- Return the hoop to the machine and stitch the remaining machine steps per the thread chart.



Step 13

- When the design is complete, remove the project from the hoop and trim the stabilizer 1/4" - 1/2" outside the design.



Step 14

- Rinse each piece in warm running water until the design is only slightly tacky.
- Place right side down on a non-stick surface to dry. Parchment paper or a cooling rack work well to prevent curling. Dry completely.
- Once dry, press right side down on a Perfect Embroidery Press Cloth.



EMBROIDERY



□ Step 15

- Use the OESD Perfect Punch Tool fitted with the 3mm tip, to create the eyelets indicated in the diagram.



□ Step 16

- Attach and tie a ribbon through the eyelets to complete the mask.
- Tip: Use Alligator clamps to thread the ribbon through the eyelet.
- The project is complete. Enjoy!



PUNCH TOOL GUIDES



32192-01



32192-02





-  = 2 MM
-  = 3 MM
-  = 4 MM

APPLIQUE PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

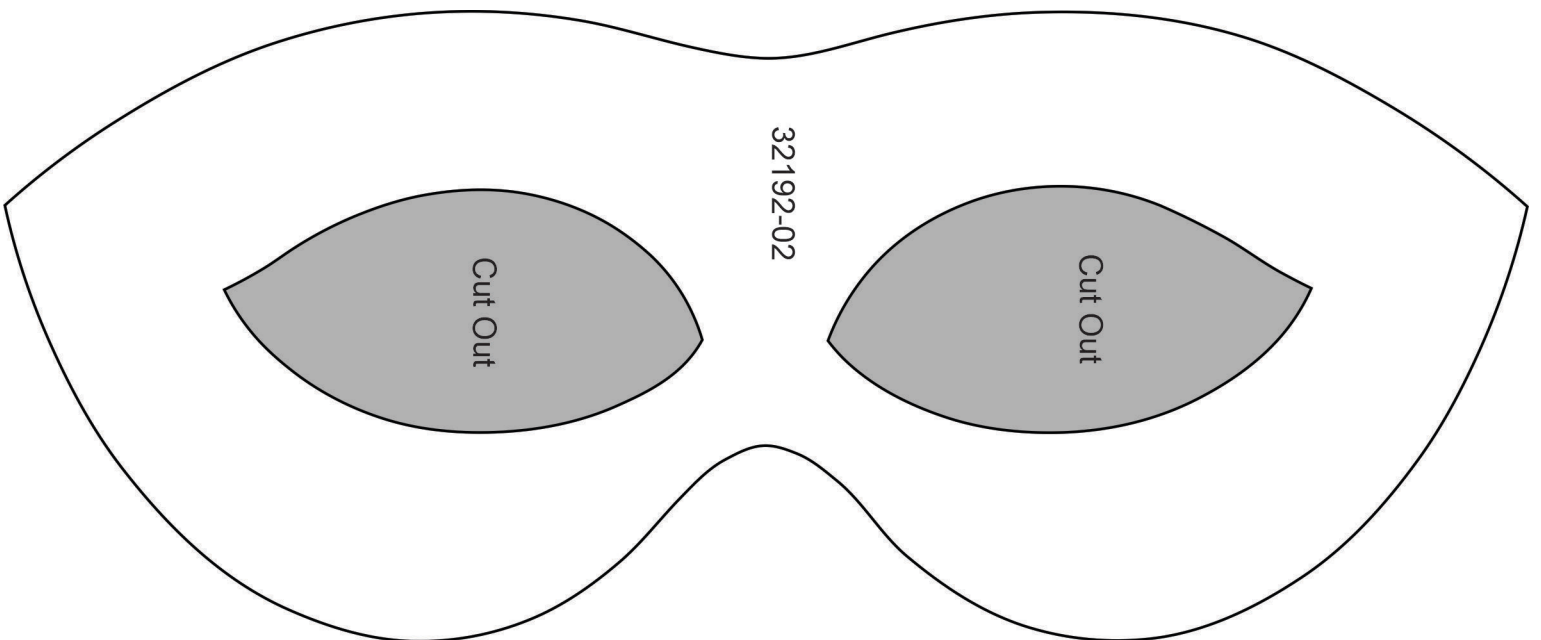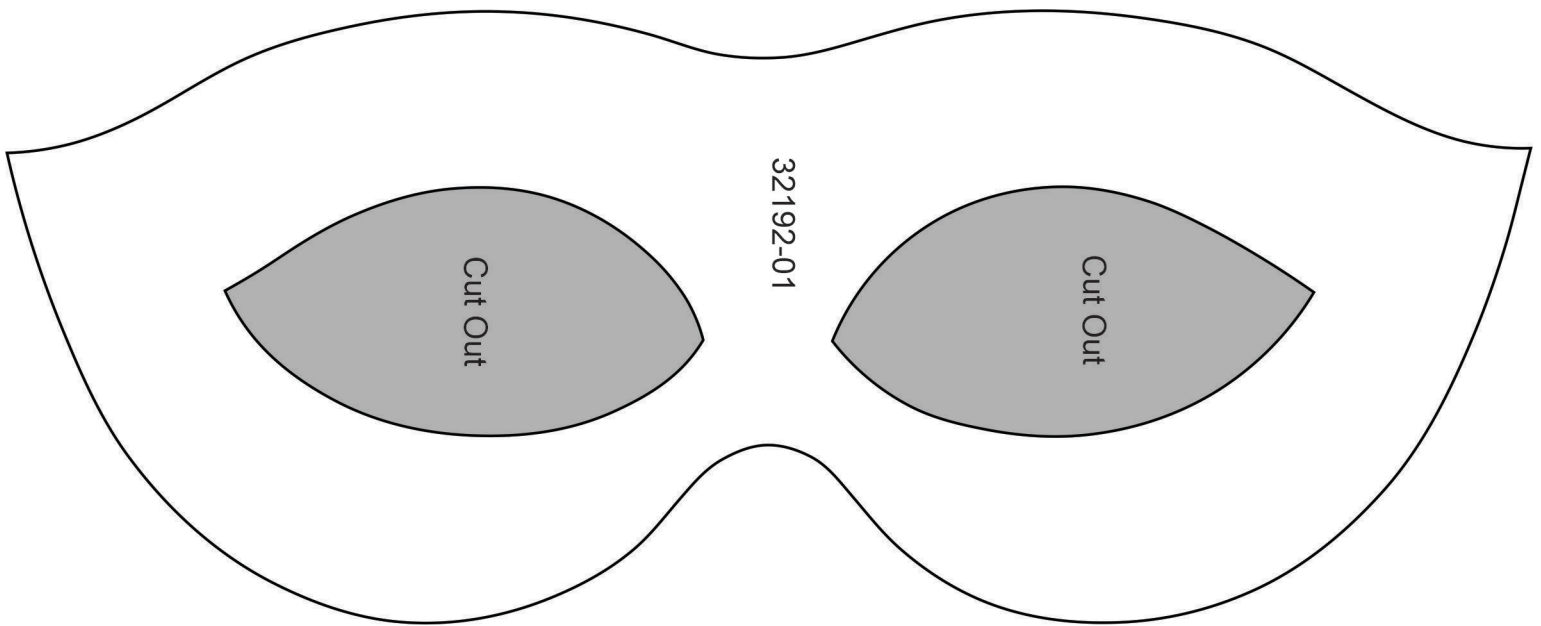

MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

