

THOMAS  KINKADEE  
*Studios*

Collection No. 80355  
1 Design/32 Files  
Project instructions included



*Everett's Cottage  
Tiling Scene*

BY  
THOMAS KINKADEE



 OESD™ PREMIER  
COLLECTION

# THREAD LIST

## Isacord Thread Colors

0010 Silky White	1133 Peru	3274 Battleship Gray
0131 Smoke	1141 Tan	3641 Wedgewood
0230 Easter Dress	1154 Penny	3713 Cornflower Blue
0352 Marsh	1161 Straw	3750 Winter Frost
0763 Dark Rattan	1342 Rust	3840 Oxford
0776 Sage	1346 Cinnamon	3852 Manatee
0821 Honey Gold	1840 Corsage	3853 Ash Blue
0851 Old Gold	1874 Pewter	3953 Ocean Blue
0861 Tantone	1921 Blossom	5005 Rain Forest
0862 Wild Rice	2224 Claret	5374 Forest Green
0870 Muslin	2504 Plum	5552 Palm Leaf
0873 Stone	2510 Roseate	5643 Green Dust
0934 Fawn	2530 Rose	5664 Willow
1010 Toast	2702 Grape Jelly	7031(AN5) Pearlescence
1030 Passion Fruit	2721 Very Berry	Light Purple
1032 Bronze	3030 Amethyst	
1061 Taupe	3241 Amethyst Frost	

**Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.  
Project Instructions Included.**

## Stabilizers

- OESD Heavy Weight TearAway 15" (2 rolls)
- OESD Fusible Woven 15" (1 rolls)

## Fabrics/Textiles

- 3 ½ yards cream cotton fabric
- Batting 32" x 38"
- Backing 1 yard
- Binding 1/3 yard, cut 4 strips width of fabric x 2 ½" strips, stitch together at 45° angle to create one long strip
- Note: Fabric yardage is based on a 10" x 15" hooping. Fabric and stabilizer amounts may vary depending on hoop size and number of tiles per hooping.

## Notions & Tools

- OESD Expert Point and Press Tool
- OESD Perfect Embroidery Press Cloth
- OESD Grippy Grid
- 505 Temporary Spray Adhesive
- Ruler, rotary cutter, mat
- Contrasting bobbin thread (seam stitch only, may be different colors)
- Fabric marking pen
- Walking foot or Dual feed foot
- Embroidery Needle Sharp 75/11

## Isacord Thread Colors

- Per thread chart
- 2 spools of 5374 Forest Green
- 2 spools of 5664 Willow

# DIAGRAM

COMPLETED TILING SCENE IS 25" X 31"



## Notes

Embroider one of each design file 80355-01 through 80355-32.


For each hooping, cut the following 10" x 15", or large enough to hoop:

- 1 layer of Fusible Woven
- 2 layers of Heavy Weight TearAway
- 1 layer of background fabric

Note: To economize on fabric, cut the fabric 15" wide (or the height of the hoop + 2") x the width of the fabric. Apply the stabilizers. Move the hoop down the length of the fabric as each block is stitched. Leave a minimum of 1.5" between the blocks.

## STEP 1

- Apply Fusible Woven to the back of the background fabric, per the product directions.
- Apply two layers of Heavy Weight TearAway to the wrong side of the background fabric with temporary spray adhesive.
- Hoop fabric and stabilizer.

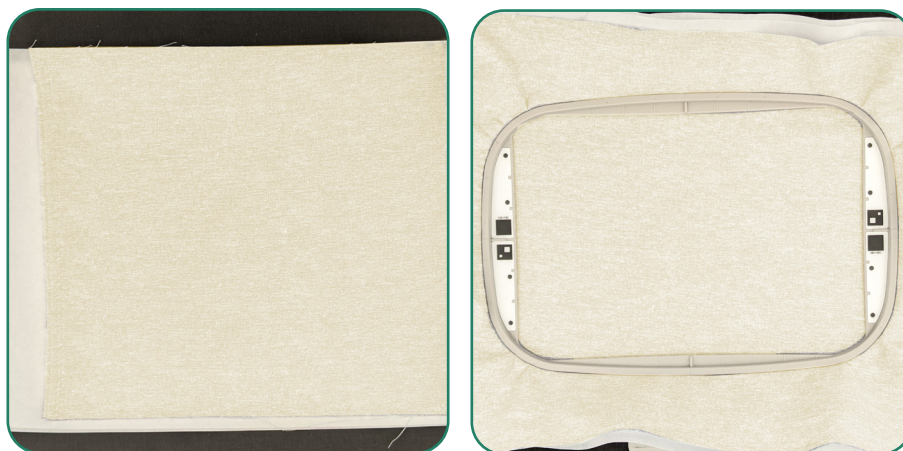

## STEP 2

- For each tile, stitch the colors per the thread chart.
- The last color change in each block is called "Seam". This line is the guide when trimming and stitching the tiles together and needs to be highly visible on the back side of the tile. Stitch the top color in a thread that blends with the fabric, invisible thread, or water-soluble thread.
- For the bobbin, use a color which contrasts sharply with the back of the tile.
- Note: Since the bobbin color doesn't have to be the same on each tile, this is a great time to use up partially wound bobbins.



## STEP 3

- After embroidery is complete, press each block face down on a Perfect Embroidery Press Cloth.
- Write the number of the block on the back so it is easily identified during construction! Use a pen or pencil that will not bleed through to the front side.




## STEP 4

- At the cutting mat, place the block right side down.
- Identify the “seam” stitch line. Trim 1/2” inch out from the seam stitch line, on all four sides, to create the seam allowance.
- Note: Accuracy here will greatly facilitate the construction of the scene.



## STEP 5


- Arrange the tiles in the layout for the scene.

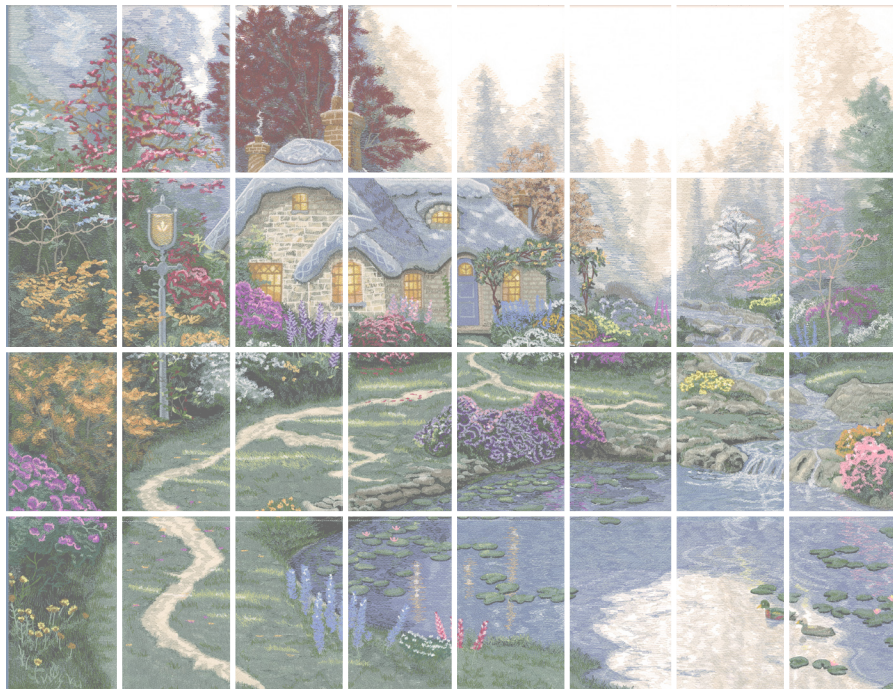

# ASSEMBLY

## STEP 6

- Stitch two adjacent tiles, right sides together; matching the long left and right sides together. Align the matching edges and stitch just inside of the seam line.
- Repeat until all the blocks have been paired.

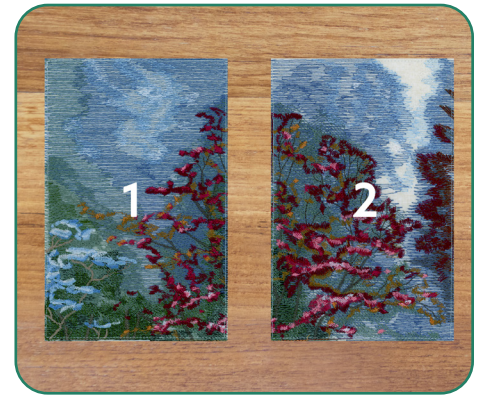

## STEP 7

- Press each seam open.
- Note: If the seams do not come apart easily, press both seam allowances to one side using steam and a cotton or linen setting.
- While warm, open the seam allowance with the large ball of the Expert Point and Press Tool.
- Press again and allow to cool.
- Once cool, remove the excess stabilizer in the seam allowance.
- Do not remove excess stabilizer from inside the seam line.



## STEP 8

- Layout the pressed tiles.
- Pair the connected tiles with the connected tiles to the adjacent pair.





## STEP 9

- Align the center seams.
- Stitch just inside the seam line connecting all four blocks. Press seams open. If the seams or major points of matching do not match up, try stitching that part first. Check for accuracy. Then stitch across the tiles.



## STEP 10

- Finish connecting the block of tiles to the ones below. Press and remove stabilizer from the seam allowances. Then continue the stitching and pressing process until the scene is complete.



## STEP 11

- Cut batting and backing at least 2" larger than the tiling scene.
- Layer the backing (right side down), batting, and center the tiling scene (right side up).
- Spray baste all 3 layers with temporary spray adhesive.



## STEP 12

- Load the sewing machine with a thread color that blends with the scene or invisible thread.
- Stitch in the ditch where the tiles connect to attach the batting and backing to the top. For best results use a walking foot or a dual feed foot.



## STEP 13

- Trim 1/4" from the edge of the top through all three layers to square up the finished scene. Zigzag over the raw edges to join the edges together.
- Bind as desired.

