

Enchanted Trinket Trays

Collection No. PK10063 2 Designs

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2024 OESD, LLC. All rights reserved.

MATERIALS



Isacord Thread Colors

7012 (S4) 14 kt. Gold Yenmet Thread

9912 Tulip Isacord Variegated Thread

9973 Summer Peonies Isacord Variegated Thread

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

MATERIALS

Stabilizero

- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- **OESD StabilStick CutAway**
- **OESD** Fiber Form
- **OESD** Applique Fuse and Fix

Fabrics/Textiles

- Indigo Quilter's Cotton (2) 9" x 10.5"
- Lilac Quilter's Cotton (2) 7.5" x 8.5"

Notion & Tools

- **OESD** Grippy GRID
- **OESD** Perfect Scoring Tool
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- **OESD** Perfect Punch Tool
- **OESD** Mini MAT
- **OESD** Perfect Embroidery Press Cloth
- Embroidery Needle Sharp 75/11
- (6) Size 20 (T5) plastic snaps

sacord Thread Colors

Per the thread chart

SUMMARY


SIGN

PK10063-01



8" x 6.75" x 1.5" Requires 1 Design

PK10063-02

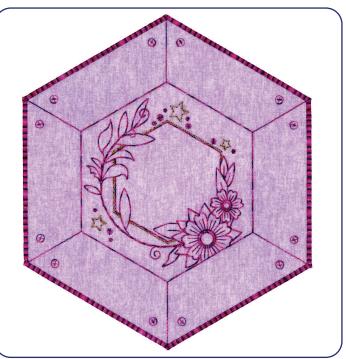

6" x 5" x 1.25" Requires 1 Design

O SD DESIGN

General Instructions

The instructions included in the collection are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.

Step 1

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately 1/4" 1/2" outside the printed applique templates.



Step 2

- Cut the Fiber Form 1/4"-1/2" larger than the applique templates.
- Fuse the trimmed template to the back of the Fiber Form with the paper side of the printed template up. Hold the iron on the template for 10-15 seconds for a secure fuse.



Ο


Step 3

- Trim the Fiber Form on the edge of the black outline. Note: Fiber form is only used in base of project.
- Set aside.

Step 4



Note: StabilStick CutAway is sufficient reinforcement for sides of project. No fiber form is required in these pieces.





 \cap

 Hoop one layer of AquaMesh and one layer of BadgeMaster.




 $\heartsuit 0$




Step 6

- Load selected design into the machine.
- Example design is PK10063-01.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Fiber Form Placement Stitch.



Step 7

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the Fiber Form, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- Place the Fiber Form within the placement stitching.
- Finger press to secure.

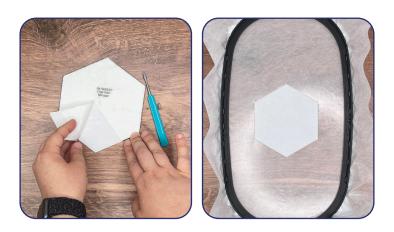

Step 8

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.



Step 9

• Stitch Machine Step 3, Front Fabric Placement Stitch.



Step 10

a 🗶 💧 🗢 a 🗶 💧

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared fabric.
- Tape in place to secure.



○ ○ X ▲ ○ ○ X ■ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ▲ ○ ○ X ■ ○ ○ X ▲ ○ ○ X ■ ○

 \heartsuit \square \times

 $\heartsuit O$

Step 11

- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.



Step 12

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.
- Tip: If the stabilizer is cut or a hole is created while trimming the fabric, use OESD Expert Embroidery Tape WashAway as a patch.



Step 13

л 🗙 💧 🗘 Λ 🗙 💧

- Return the hoop to the machine.
- Stitch Machine Step 5, Tray Detail.
- Stitch Machine Step 6, Tray Detail.



 $\times \mid \heartsuit \square \times$

Step 14

- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over and place the prepared fabric, right side up, completely covering the placement stitch.
- Carefully tape to secure.
- Tip: Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.

Step 15

Step 16

project from the hoop.

to the cut line as possible.

- Return the hoop to the machine.
- Match the bobbin thread to the top thread.
- Stitch Machine Step 7, Back Fabric Cut Line and Tackdown.

Remove the hoop from the machine, but NOT the

Turn the hoop over and trim the excess fabric as close



 $\heartsuit \square \times$









EMBROIDER'

Step 17

- Return the hoop to the machine.
- Stitch remaining machine steps, changing threads per the thread chart.



Step 18

When the design is complete, remove the project from the hoop and trim the stabilizer 1/4"- 1/2" outside the design.



ASSEMBLY


Step 19

- Rinse the tray in warm running water until the design is only slightly tacky. To prevent curling, place right side down on a non-stick surface to dry. Parchment paper or a cooling rack work well. Dry completely.
- Once dry, press right side down on a Perfect Embroidery Press Cloth.



Step 20

• Press the sides into the center along the center fold lines using steam. While the tray is warm, pinch the side fold lines to give shape to the tray.

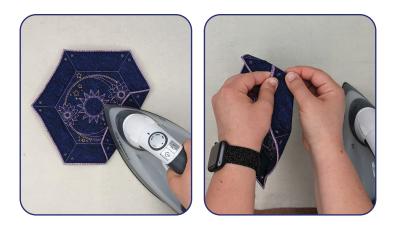


ASSEMBLY

O SD DESIGN

Step 21

- Use OESD MiniMAT and Punch Tool with the 2mm attachment to create the eyelets indicated in the diagram.
- Reference Punch Tool Guide on page 15.

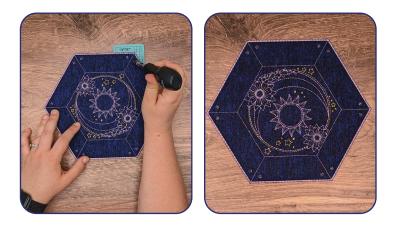

Step 22

• Attach plastic snaps according to the manufacturer's instructions in the eyelet holes.



ASSEMBLY

Step 23

• Close the snaps to form the tray.




DESIGN


Step 24

• The project is complete. Enjoy!





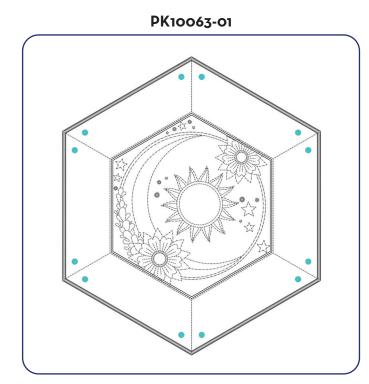

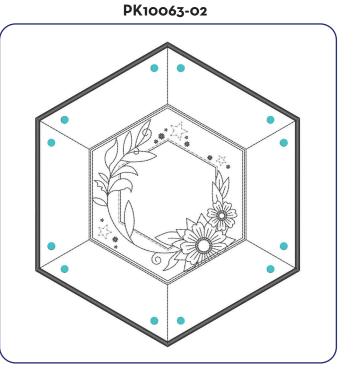



It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2024 OESD, LLC. All rights reserved.

PRINTING INSTRUCTIONS

.

their actual size. Images r			
Print			×
Printer Name: Savin C3535 PCL5c Status: Ready Type: Savin C3535 PCL5c		Properties Comments and Forms: Document and Markups	•
Print Range All Current view Current page Pages 1 - 51 Subset: All pages in range Reverse pages Page Handling Copies: 1	Collate	Preview: Composite	K
Print to file		v Document: 8.5 x 11.0in Paper: 8.5 x 11.0in 1/52	

TO SAVE PAPER Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image. Image: Image image image image image image image. Image image image image image image image image. Image image image image image image.

•

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2024 OESD, LLC. All rights reserved.

Subset: All pages in range


Reverse pages


••••


.


••••




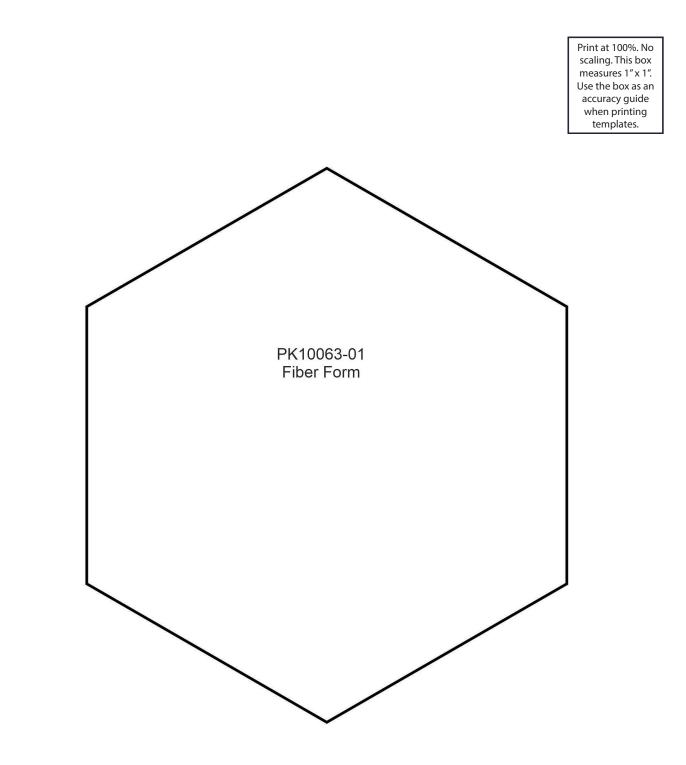

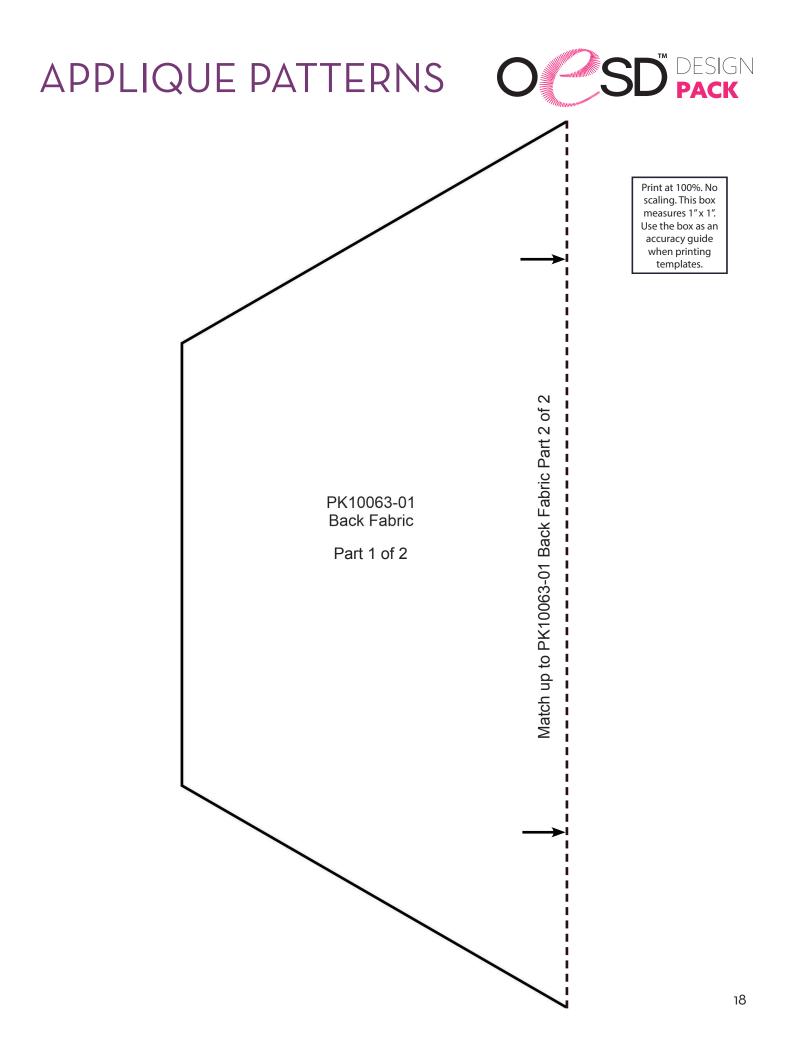


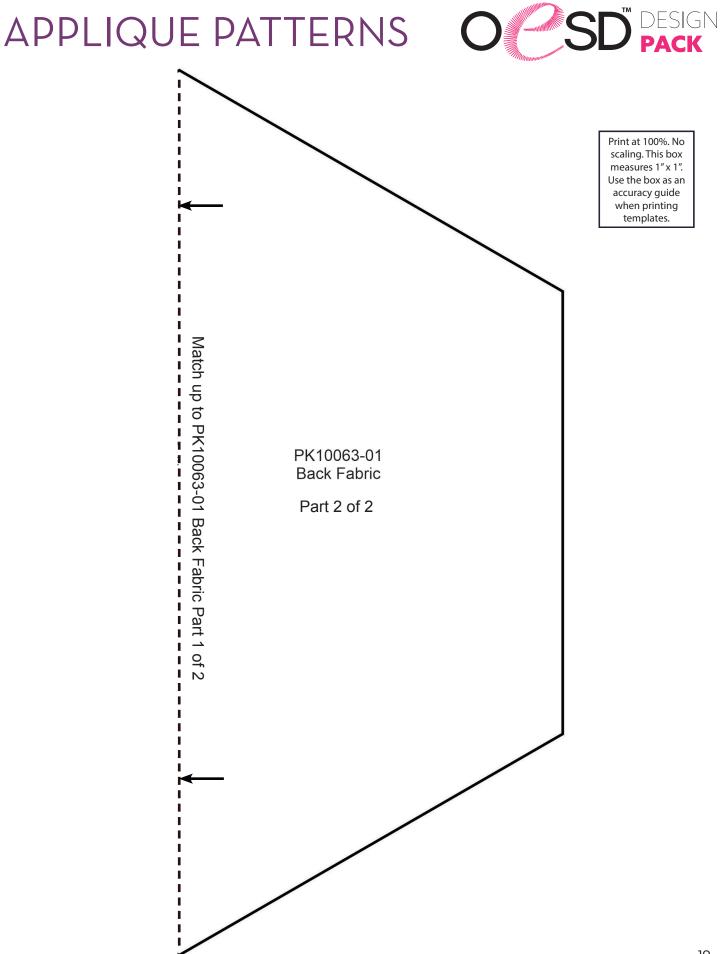

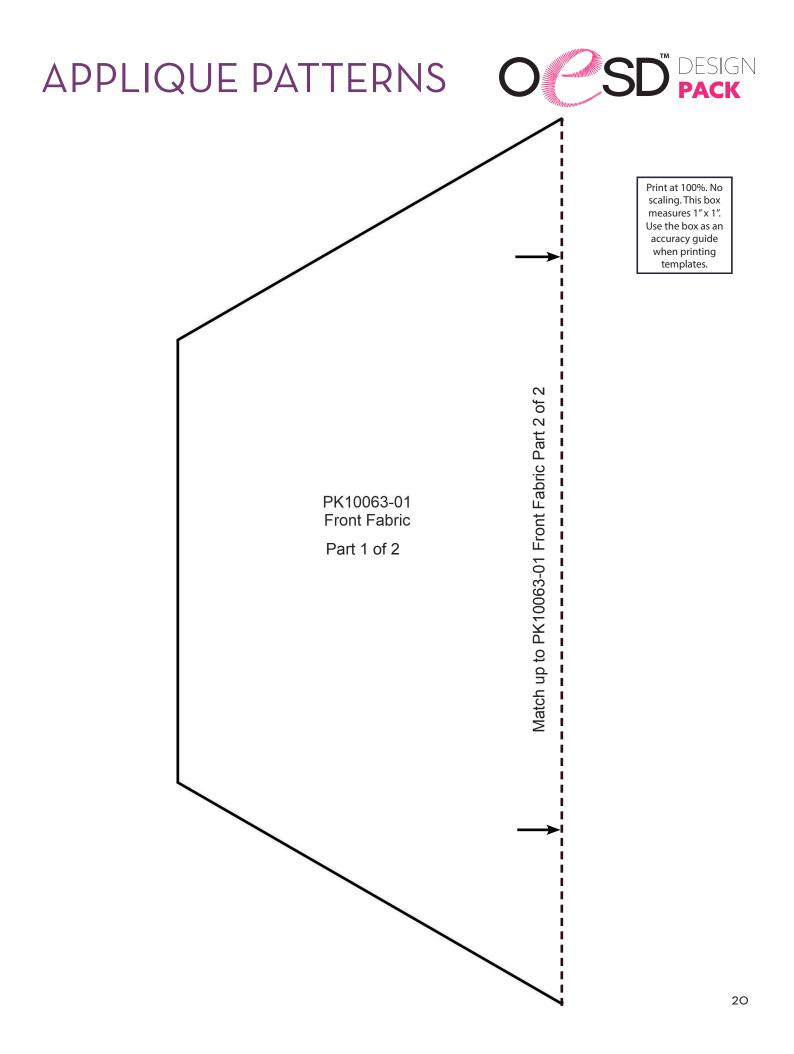


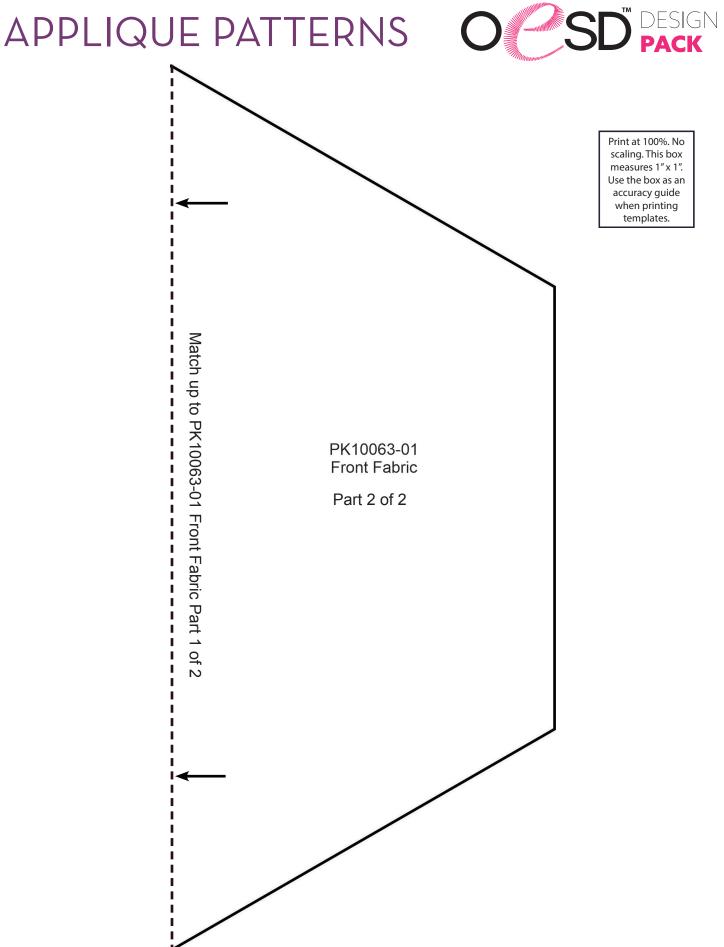




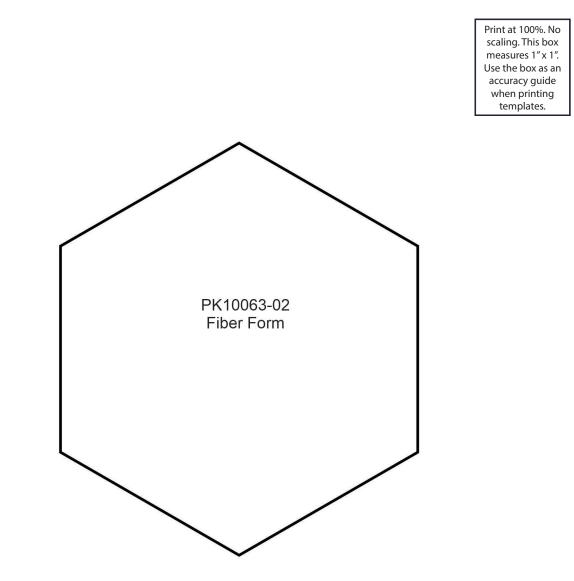




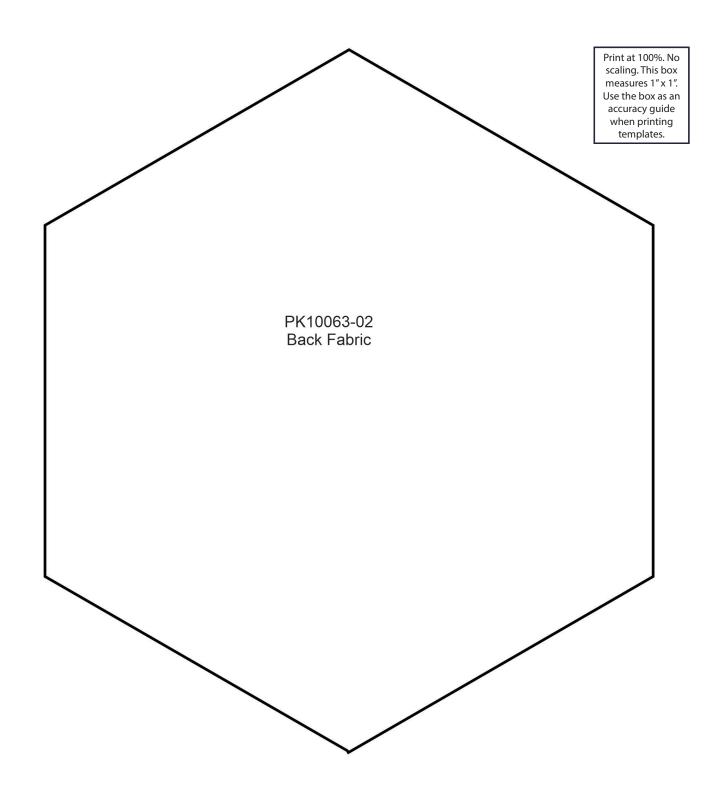




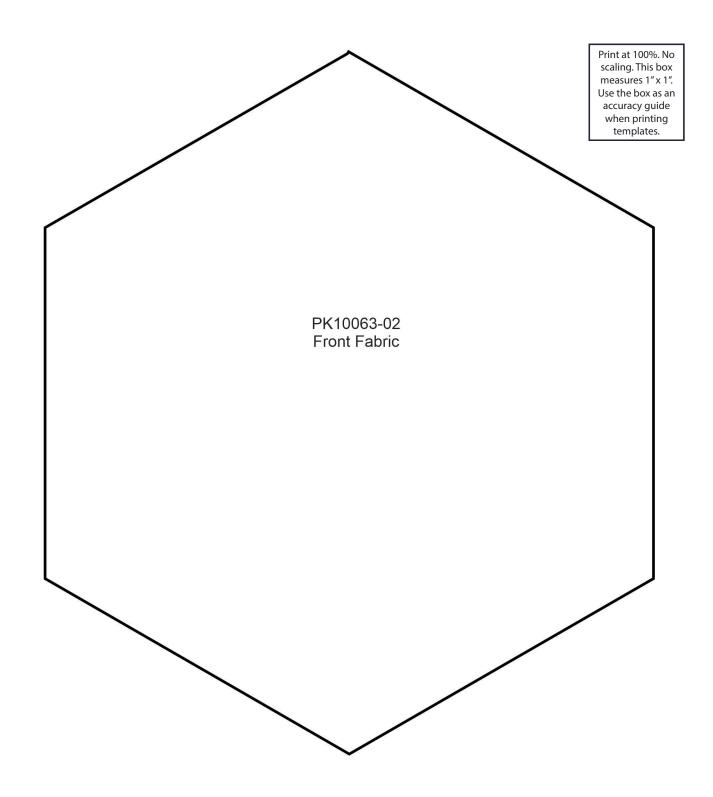



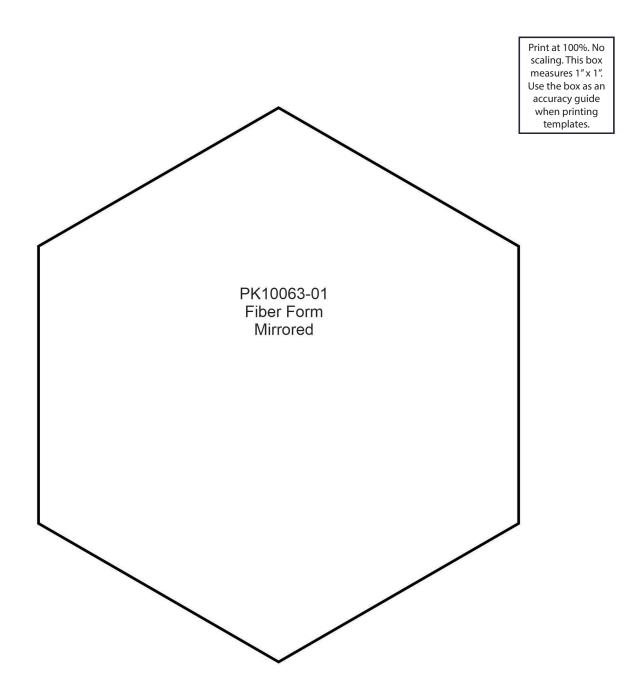

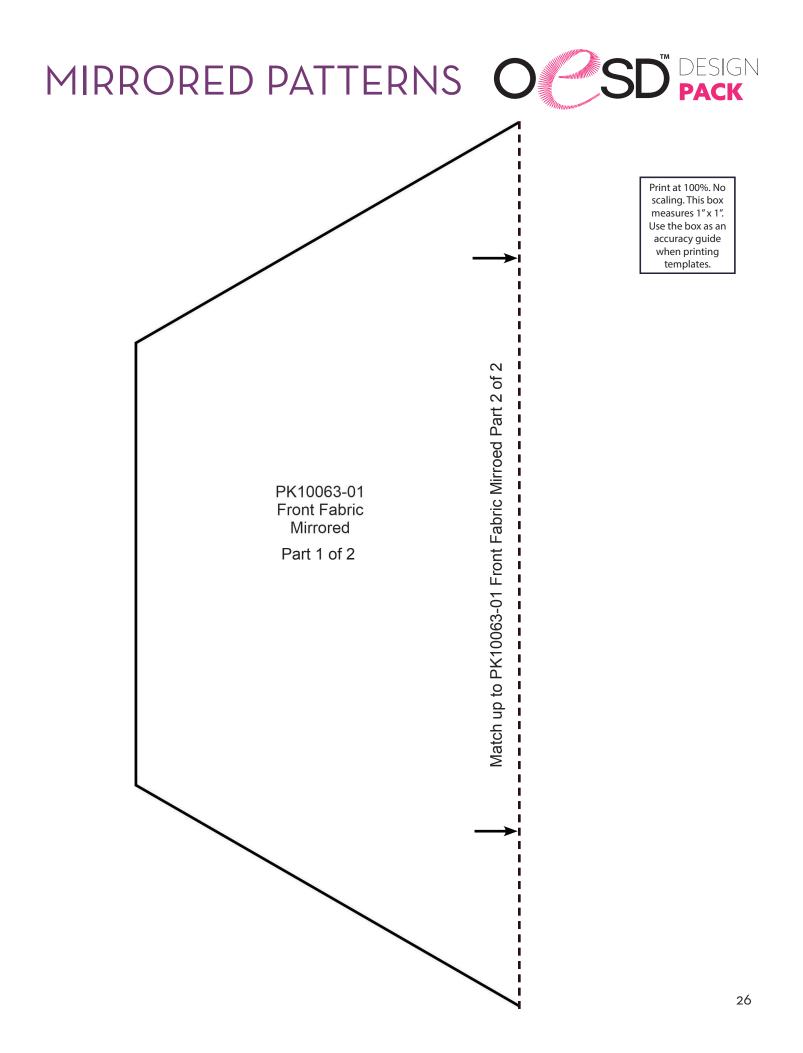

MIRRORED PATTERNS OSD DESIGN Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates. Match up to PK10063-01 Front Fabric Mirrored Part 1 of 2 PK10063-01 Front Fabric


Mirrored


Part 2 of 2

н

н

I

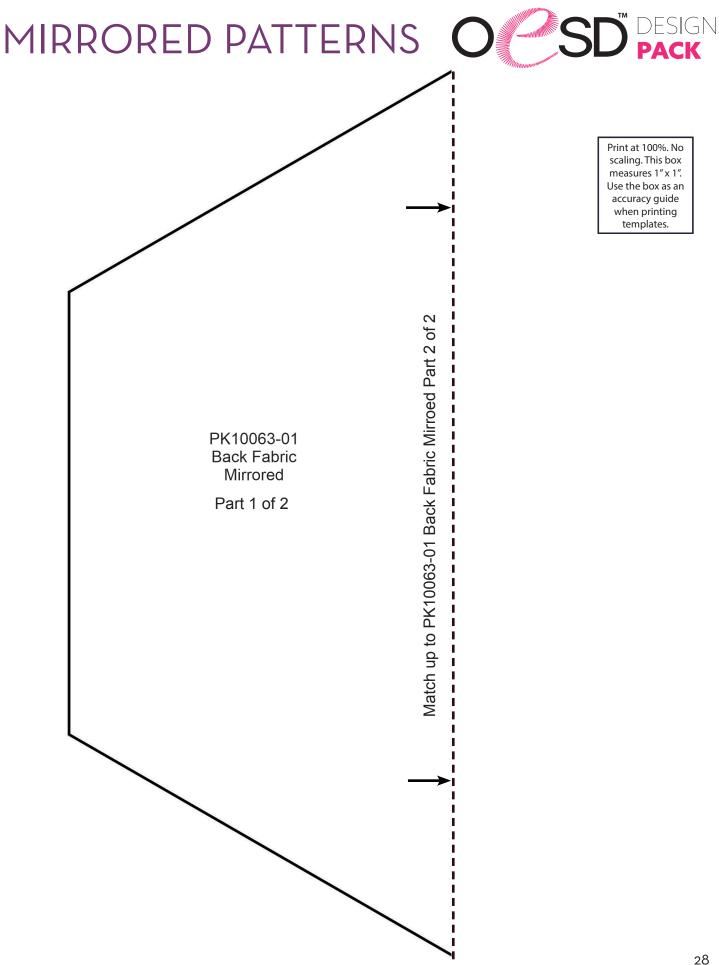

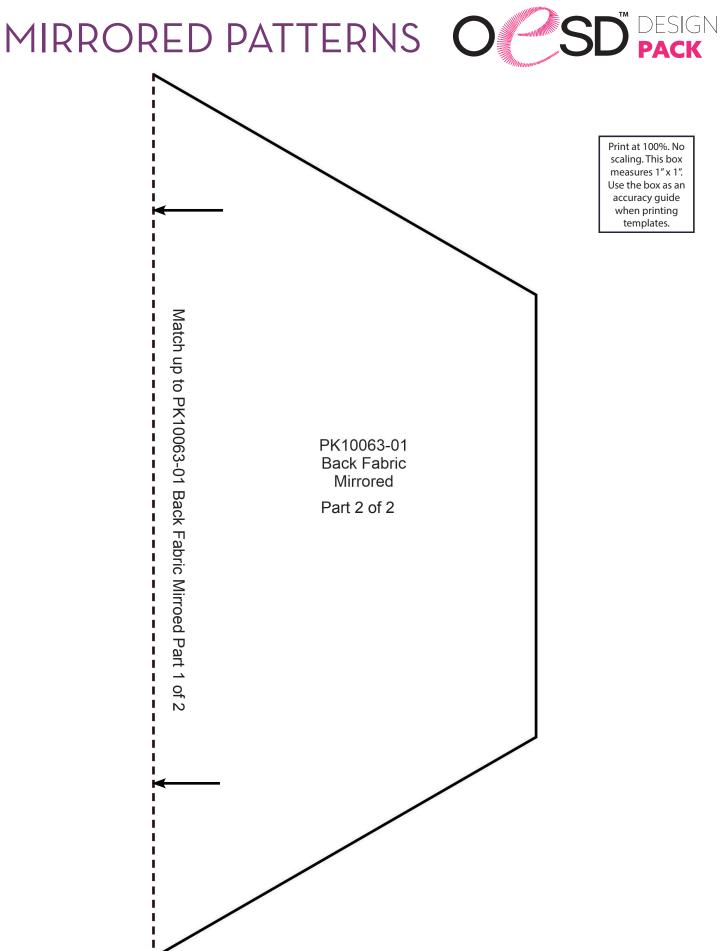

MIRRORED PATTERNS OSD DESIGN

