

Pie Please Banners



Collection No. PK10067
6 Designs

MATERIALS



Isacord Thread Colors

- 0101 Eggshell
- 0670 Cream
- 0781 Candlewick
- 0842 Toffee
- 0853 Pecan
- 0933 Redwood
- 0941 Golden Grain
- 1010 Toast
- 1123 Caramel Cream
- 1903 Lipstick
- 1911 Foliage Rose
- 3620 Marine Blue
- 3820 Celestial
- 5722 Green Grass
- 5740 Mint

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.



MATERIALS



Stabilizers

- OESD Light Weight TearAway
- OESD Applique Fuse and Fix

Fabrics/Textiles

- OESD Favorite FELT Brown, 3 packages
- Quilter's cotton, various colors
- Ribbon or cord

Notion & Tools

- OESD Expert Embroidery Tape TearAway
- OESD Grippy GRID
- OESD Perfect Scoring Tool
- OESD Alligator Clamps
- OESD Perfect Embroidery Press Cloth
- Embroidery Needle Sharp 75/11

Isacord Thread Colors

- Per the thread chart



SUMMARY

PK10067-01



Requires 1 Design

Back



PK10067-02



Requires 1 Design

Back



PK10067-03



Requires 1 Design

Back



PK10067-04



Requires 1 Design

Back



PK10067-05



Requires 1 Design

Back



PK10067-06



Requires 1 Design

Back



General Instructions

The instructions included in the collection are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.

□ Step 1

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately $\frac{1}{4}$ " - $\frac{1}{2}$ " outside the printed applique templates.



□ Step 2


- Cut the fabric $\frac{1}{4}$ " - $\frac{1}{2}$ " larger than the applique templates.
- Fuse the trimmed templates to the back of the fabric with the paper side of the printed template up. Hold the iron on the template for 10-15 seconds for a secure fuse.



EMBROIDERY


Step 3

- Trim the fabric on the edge of the black outline.
- Set aside.

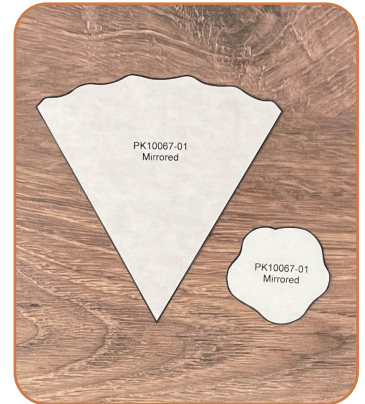

Step 4

- Hoop one layer of Light Weight TearAway for all designs.

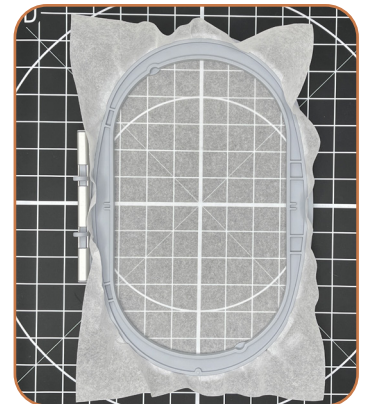

Step 5

- Load selected design into the machine.
- Example design is PK10067-01.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Tan Felt Placement Stitch.




□ Step 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with brown felt.
- Tape in place to secure.



□ Step 7

- Return the hoop to the machine.
- Stitch Machine Step 2, Orange Fabric Placement Stitch.

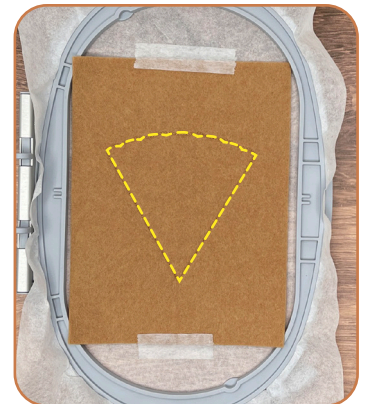


□ Step 8

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the applique fabric, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- Place the applique fabric within the placement stitching.
- Finger press to secure.



□ Step 9

- Return the hoop to the machine.
- Stitch Machine Step 3, Tackdown.

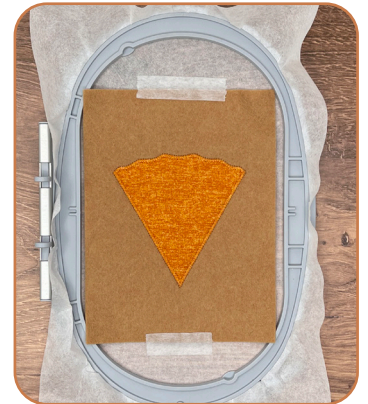

□ Step 10

- Stitch Machine Step 4, White Fabric Placement Stitch.



□ Step 11

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the applique fabric, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- Place the applique fabric within the placement stitching.
- Finger press to secure.



□ Step 12

- Return the hoop to the machine.
- Stitch Machine Steps 5 – 6.



□ Step 13

- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over and place the brown felt completely covering the placement stitch.
- Carefully tape to secure.
- Tip: Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.



□ Step 14

- Return the hoop to the machine.
- Change bobbin to match the top thread.
- Stitch Machine Step 7, Seam.



EMBROIDERY

□ Step 15

- When the design is complete, remove the project from the hoop.
- Trim excess stabilizer and felt $\frac{1}{8}$ " to $\frac{1}{4}$ " from the seam lines.



□ Step 16

- Pull ribbon through the channel as shown.




□ Step 17

- The project is complete. Enjoy!




ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

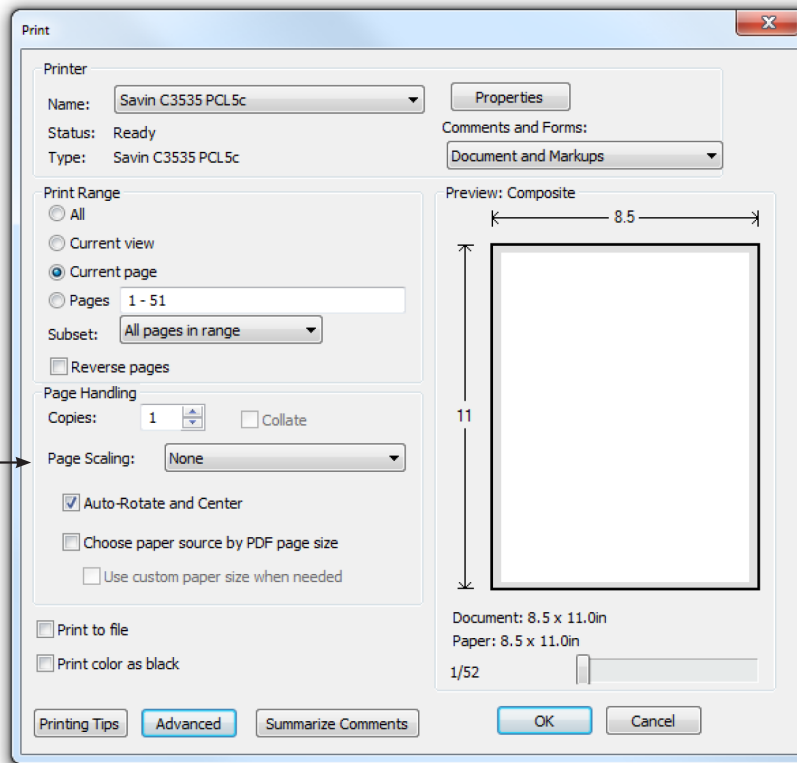




TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.





APPLIQUE PATTERNS

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

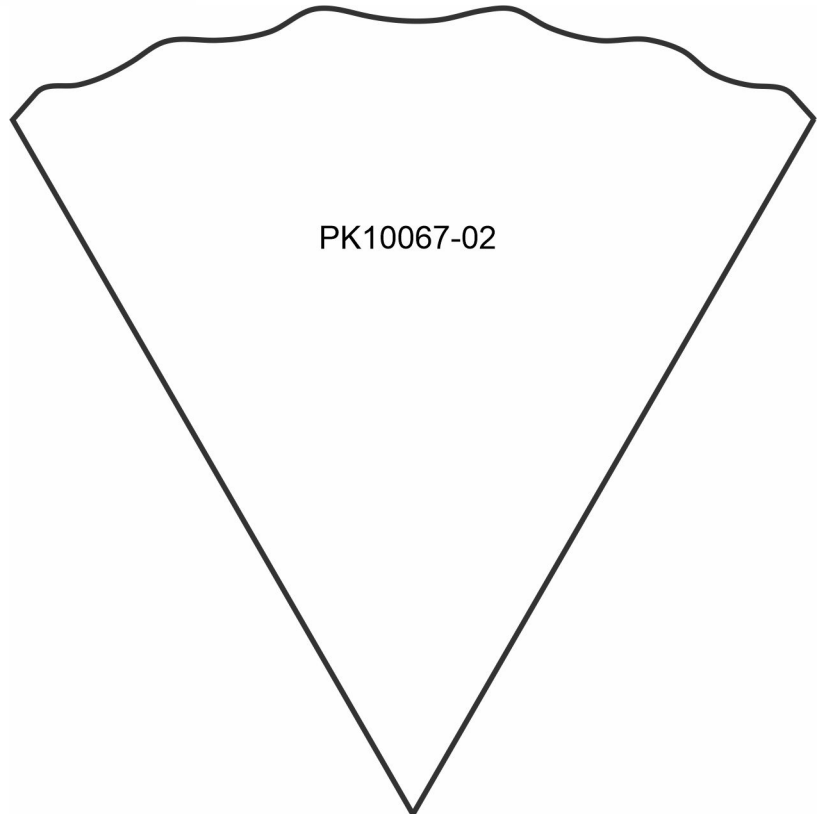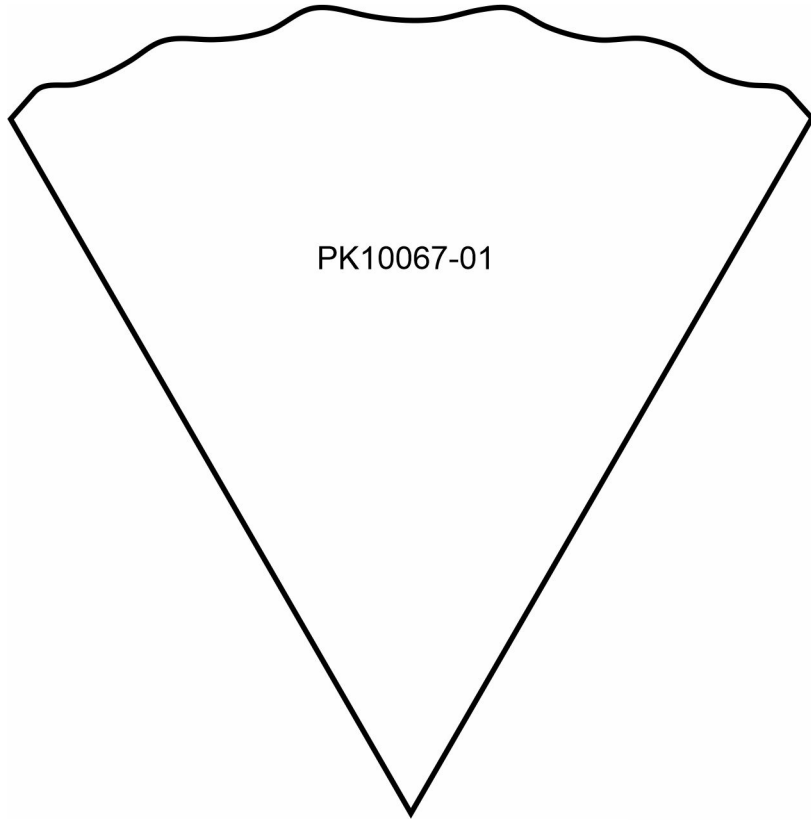

APPLIQUE PATTERNS





Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

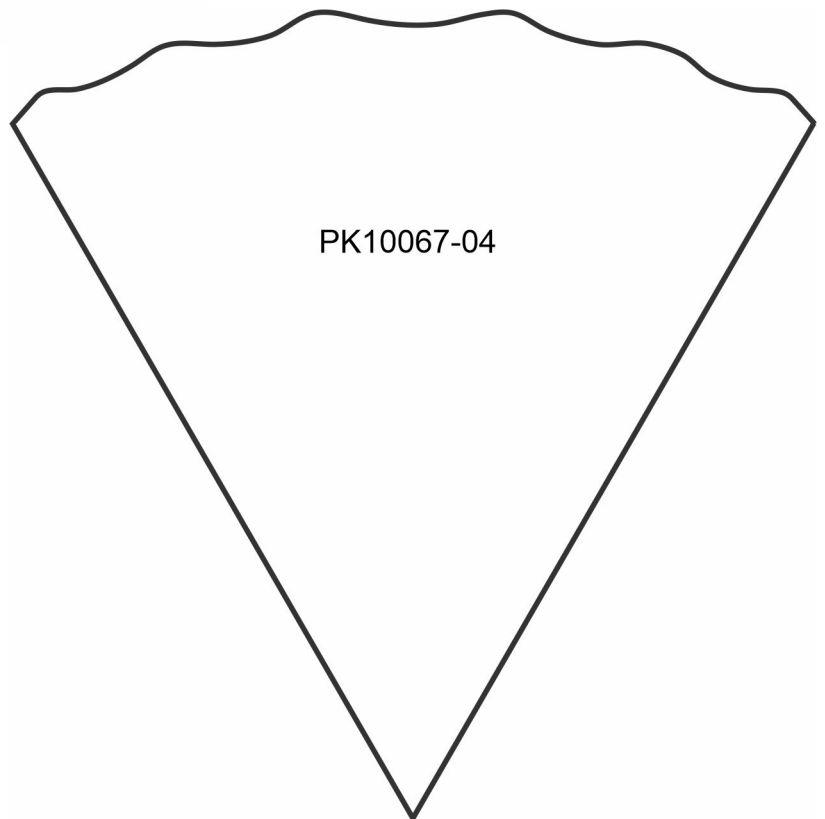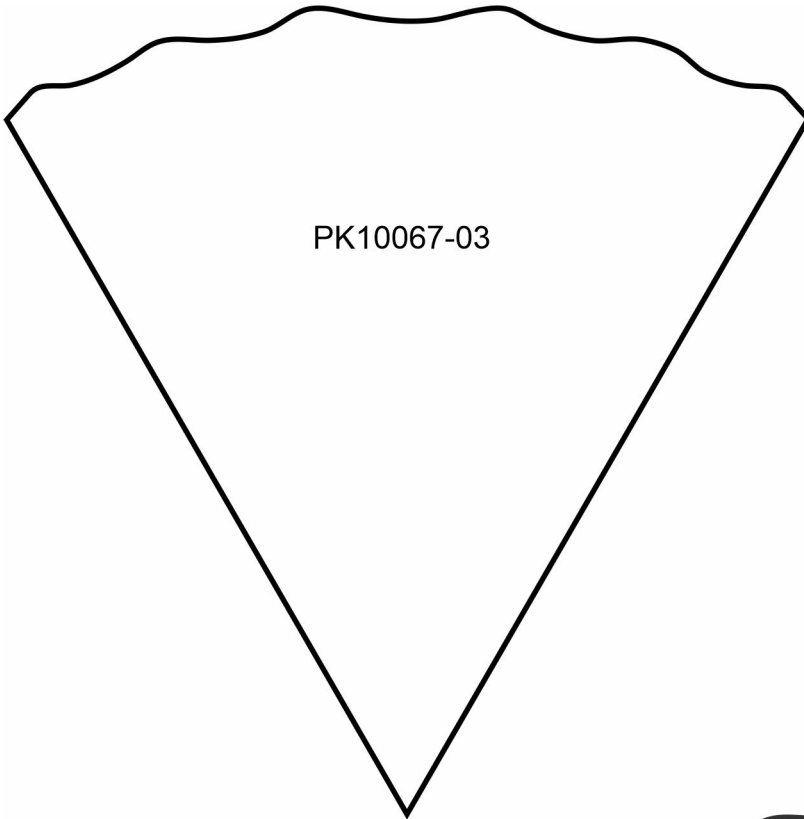

APPLIQUE PATTERNS




Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

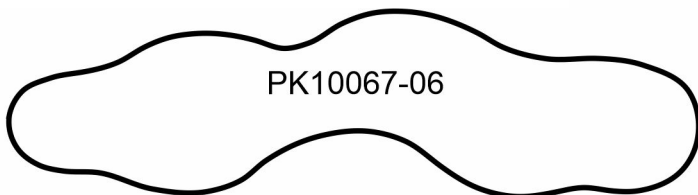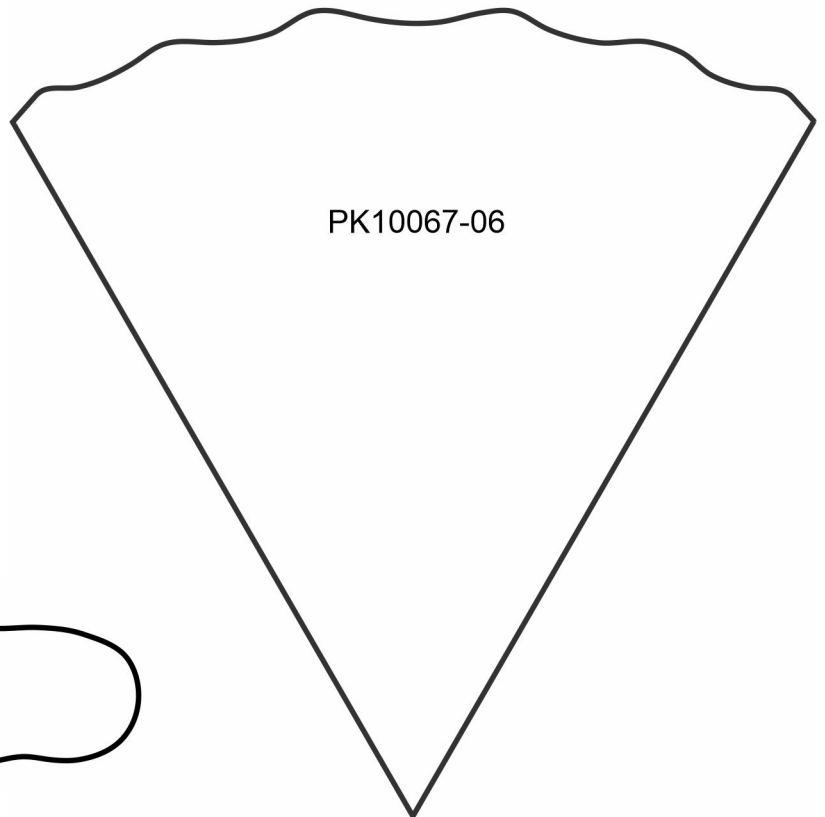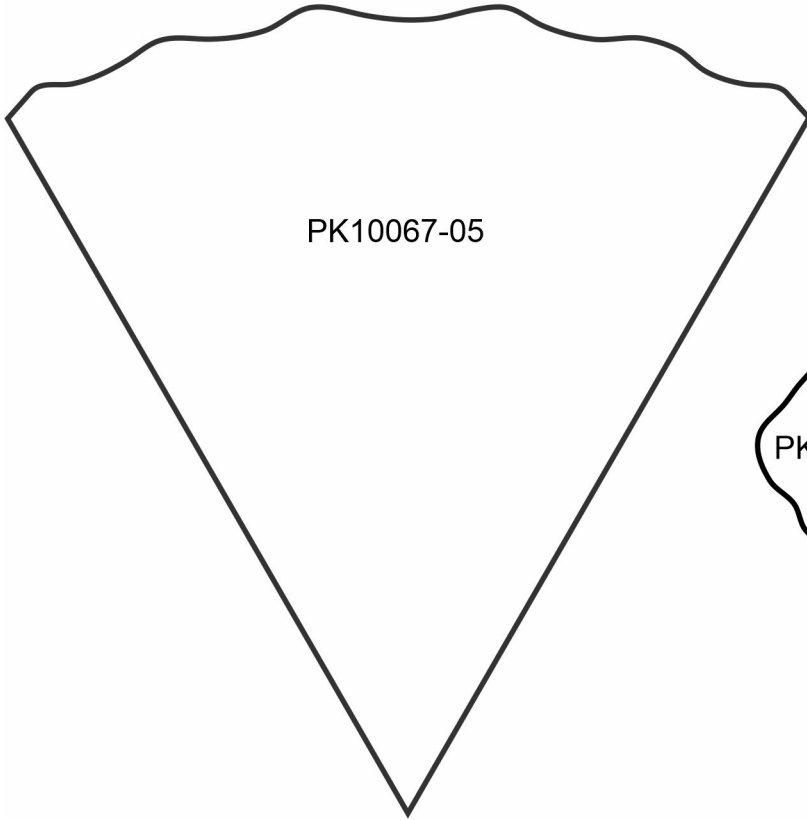


MIRRORED PATTERNS




Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

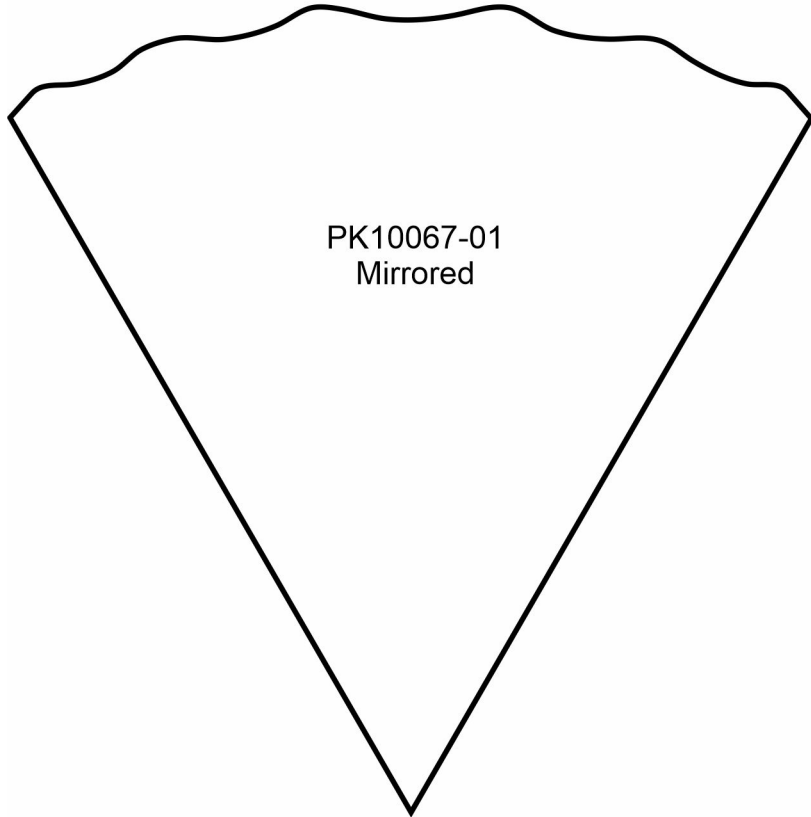

PK10067-01
Mirrored

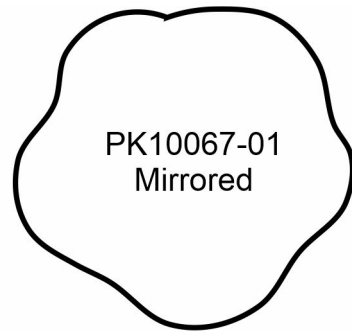


PK10067-01
Mirrored

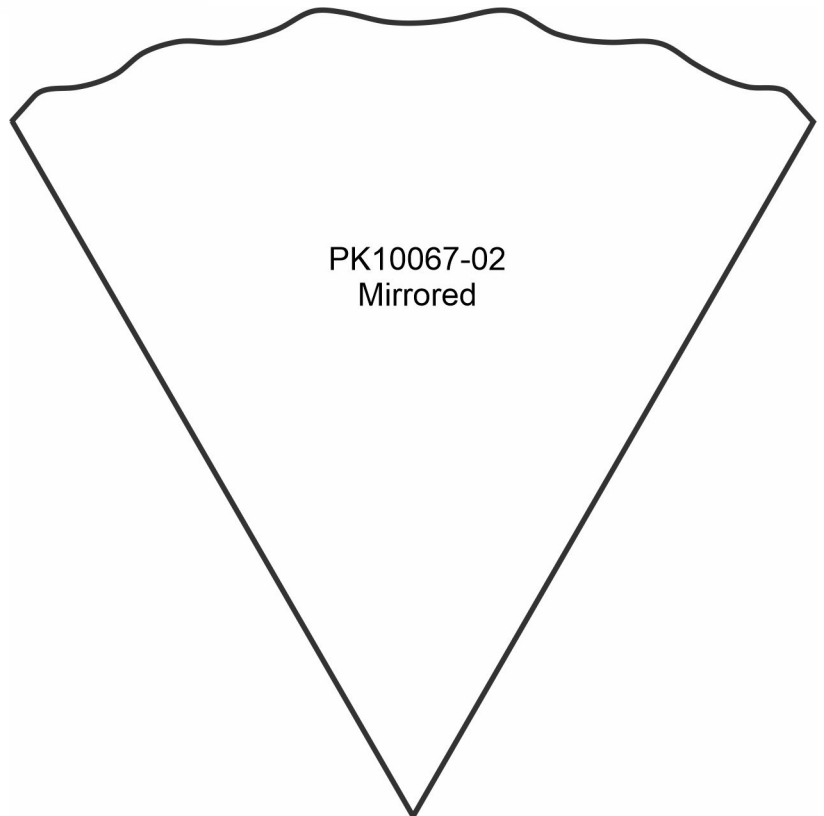


PK10067-02
Mirrored

MIRRORED PATTERNS

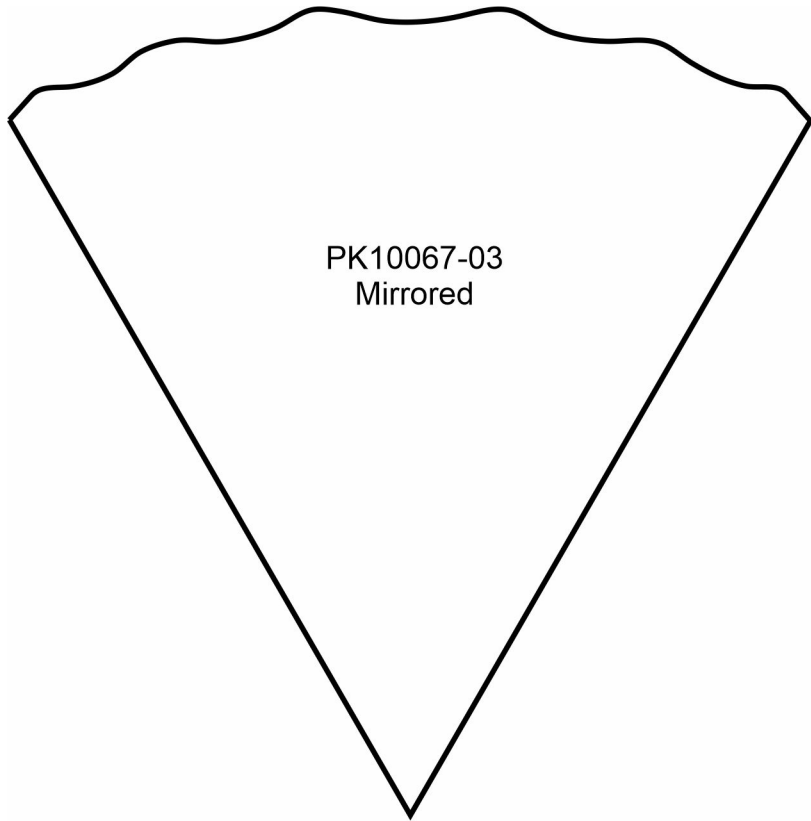

PK10067-03
Mirrored

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

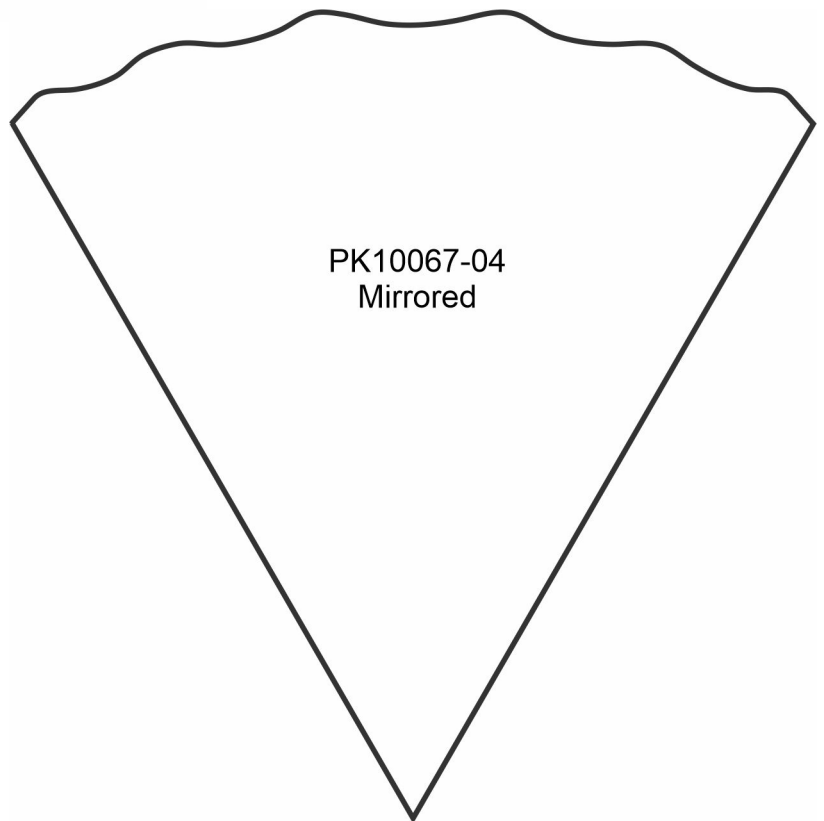

PK10067-04
Mirrored

MIRRORED PATTERNS

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

