



MATERIALS



Isacord Thread Colors

0101 Eggshell 1972 Silvery Grey

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

MATERIALS



- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway
- **OESD Fiber Form**
- OESD Applique Fuse and Fix

Fabrics/Textiles

- White Quilter's Cotton
 - (4) 7" x 5 1/2" for (1) PK10074-01 and (1) PK10074-02
 - (4) 4" x 4" for (1) PK10074-03 and (1) PK10074-06
 - (4) 6 1/2" x 5" for (1) PK10074-04 and (1) PK10074-05
- Plaid Flannel or Homespun
 - (2) 4 1/2" x 5 1/2" for PK10074-01
 - (2) 4 1/2" x 5" for PK10074-04

Notion & Tools

- OESD Grippy GRID
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Embroidery Press Cloth
- **OESD Perfect Punch Tool**

- **OESD Mini MAT**
- OESD Alligator Clamps
- **OESD Button Clips**
- Embroidery Needle Sharp 75/11 (FSA)

Isacord Thread Colors

- Per the thread chart
- Match bobbin thread to top thread.

SUMMARY





Large Snowman: 4 1/4" L x 4" W x 9 1/2" H




Small Snowman: 3 3/4" L x 3 1/2" W x 8 1/2" H



Requires 1 Design



Requires 1 Design



PK10074-04



Requires 1 Design



Requires 1 Design



Requires 1 Design

DOUBLE SIDED FREESTANDING APPLIQUE



General Instructions

The freestanding applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same. All designs are stitched with matching thread, top and bobbin.

Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.

Step 1


- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately 1/4" 1/2" outside the printed applique templates.





- Cut the Fiber Form 1/4" 1/2" larger than the applique templates.
- Fuse the trimmed templates to the back of the Fiber Form with the paper side of the printed template up. Hold the iron on the template for 10 – 15 seconds for a secure fuse.





Step 3

- Trim the Fiber Form on the edge of the black outline.
- Set aside.






- Cut the applique fabrics 1/4" 1/2" larger than the templates that are included at the end of the instructions.
- Adhere one layer of StabilStick CutAway to the wrong side of all applique fabrics to provide stiffness to the finished structure.






Step 5

 Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.






- Load selected design into the machine.
- Example design is PK10074-01.
- Thread the machine per the thread chart.
- Match top and bobbin thread.
- Place the hoop on the machine.
- Stitch Machine Step 1, Fiber Form Placement Stitch.



Step 7

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the Fiber Form, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- · Place the Fiber Form within the placement stitching.
- Finger press to secure.
 - Tip: Applique Fuse and Fix is repositionable.







- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown



Step 9

 Stitch Machine Step 3, Front and Back White Fabric Placement Stitch.



Step 10

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared white applique fabric.
- Tape in place to secure.





- Turn the hoop over and place the prepared white applique fabric, right side up, completely covering the placement stitch.
- Carefully tape to secure.
 Tip: Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.



Step 12

- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.



___ Step 13

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line as
 possible. If the outermost stitches (cut line) are cut, the
 inner stitches (tackdown) will hold the applique in place.
 Tip: If the stabilizer is cut or a hole is created while
 trimming the fabric, use OESD Expert Embroidery Tape
 WashAway as a patch.





Turn the hoop over and trim the excess fabric as close to the cut line as possible.



Step 15

- Return the hoop to the machine.
- Stitch Machine Step 5, Front and Back Plaid Fabric Placement Stitch.



Step 16

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared plaid applique fabric.
- Tape in place to secure.



- Turn the hoop over and place the prepared plaid applique fabric, right side up, completely covering the placement stitch.
- Carefully tape to secure.



Step 18

- · Return the hoop to the machine.
- Stitch Machine Step 6, Cut Line and Tackdown.



Step 19

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line as possible





Turn the hoop over and trim the excess fabric as close to the cut line as possible.



Step 21

- Return the hoop to the machine.
- Stitch remaining machine steps, changing threads per the thread chart.



Step 22

When the design is complete, remove the project from the hoop and trim the stabilizer 1/4" - 1/2" outside the design.



ASSEMBLY



Step 23

- Rinse each piece in warm running water until the design is only slightly tacky.
- Place right side down on a non-stick surface to dry. This will help prevent curling.
- Parchment paper or a cooling rack work well to keep the design from sticking to the surface.
- · Dry completely.
- Once dry, press right side down on a Perfect Embroidery Press Cloth.



Step 24

- Before assembly, use the OESD Mini MAT and Punch Tool with the 3mm attachment to create the eyelets indicated in the diagram.
 - Tip: Take care not to cut the satin stitching.
- Reference the Punch Tool Guide on page 16.



___ Step 25

 Slide the Large Snowman Panel 1 FSA (PK10074-01) into the slot on the Large Snowman Panel 2 FSA (PK10074-02).



ASSEMBLY



Step 26

- Match the eyelets of the Large Snowman Base FSA (PK1004-03) to the buttonettes of the Large Snowman Panels.
- Use OESD Alligator Clamps to pull the buttonettes through the corresponding eyelets.






Step 27

• The project is complete. Enjoy!






PK10074-03

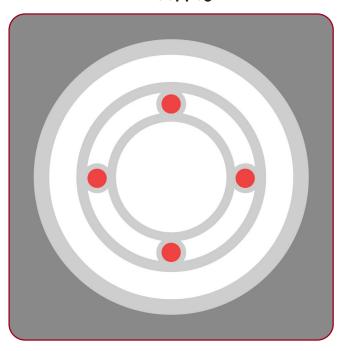

PK10074-06

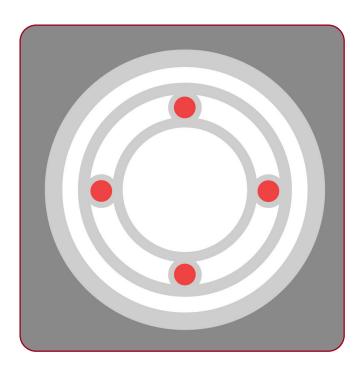


= 2 MM

= 4 MM




ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

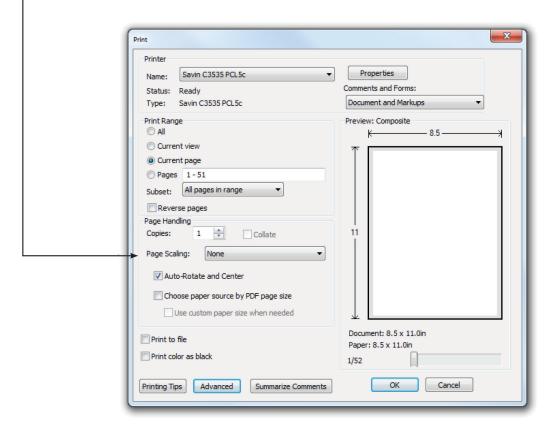


TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.






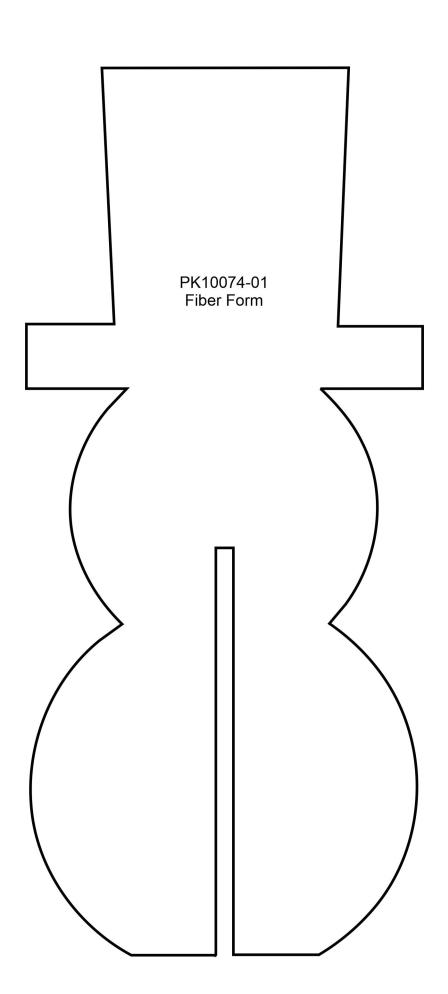


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.



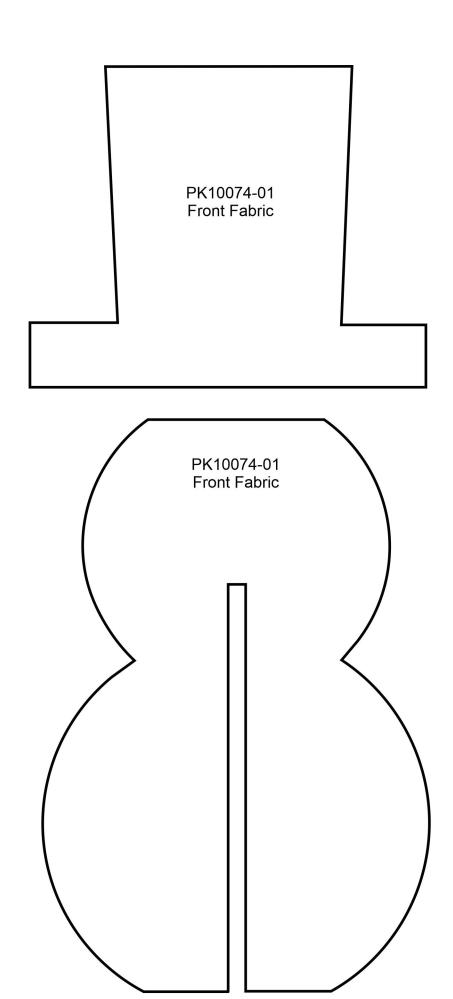


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.



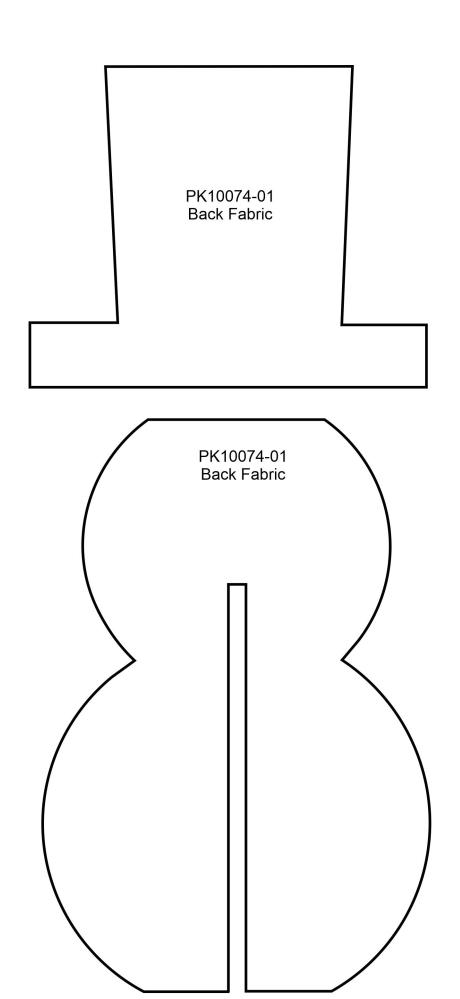


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.




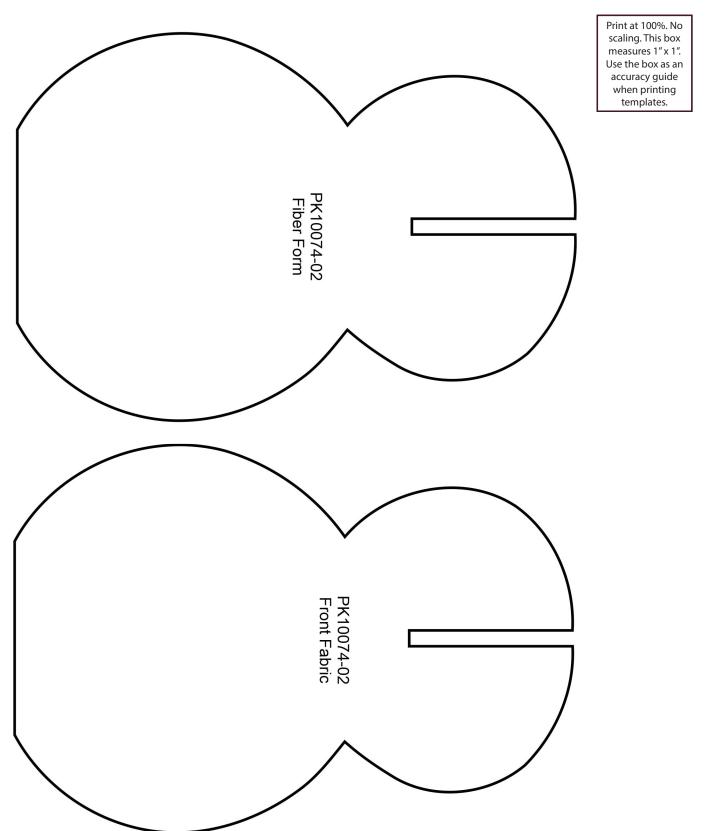




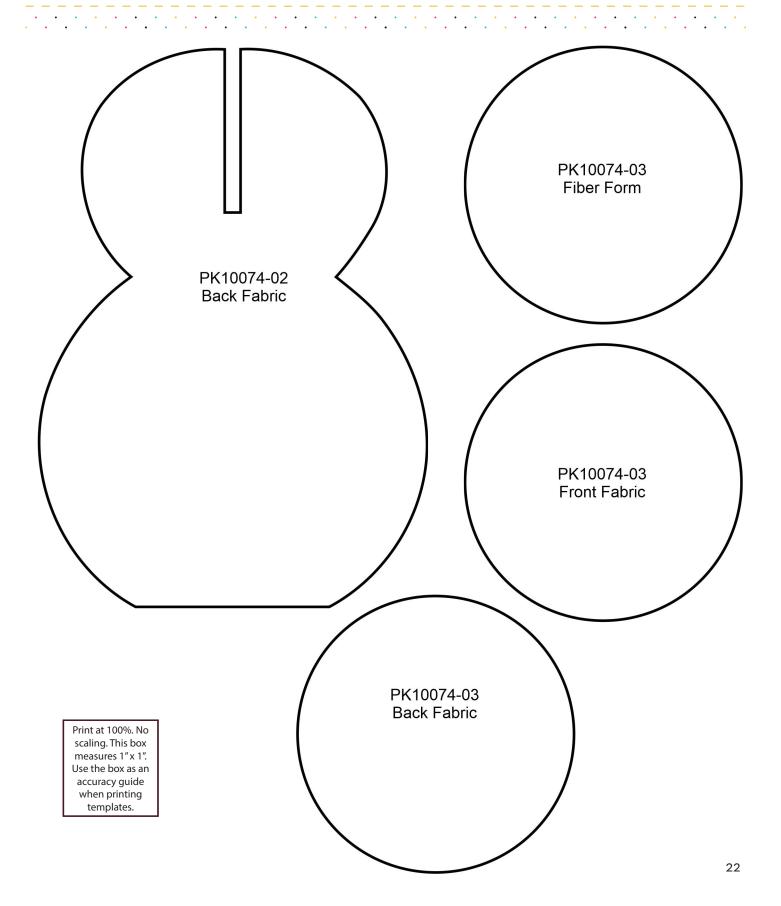




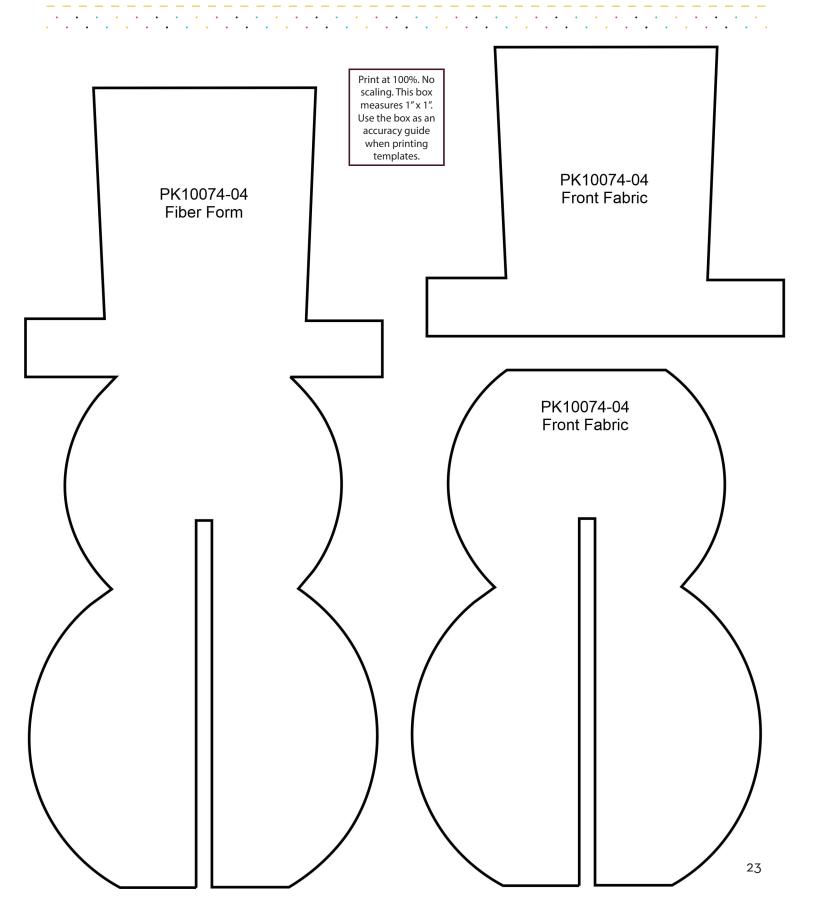




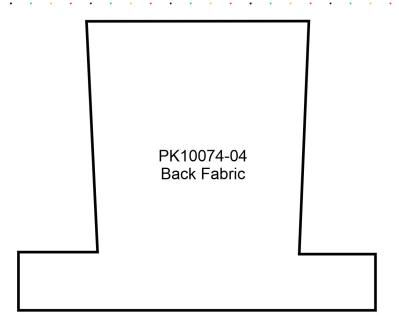


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

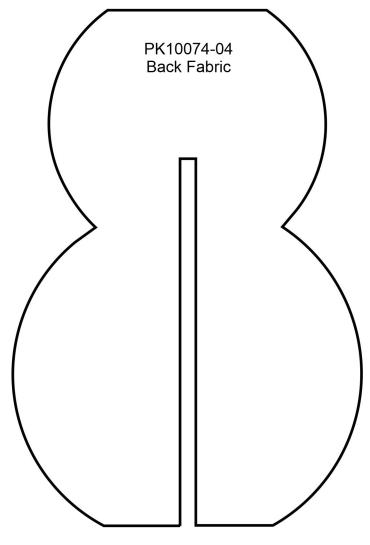



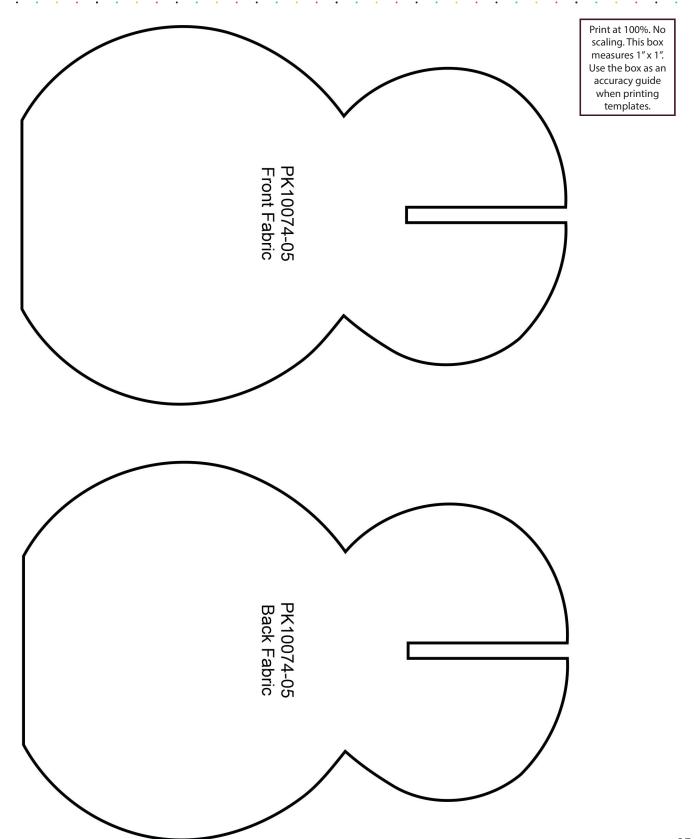




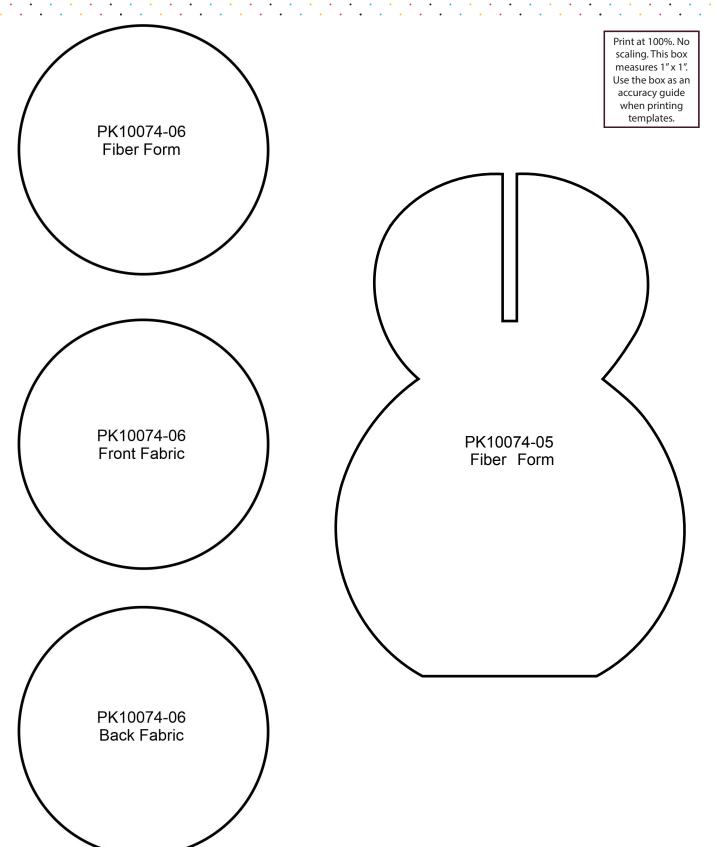






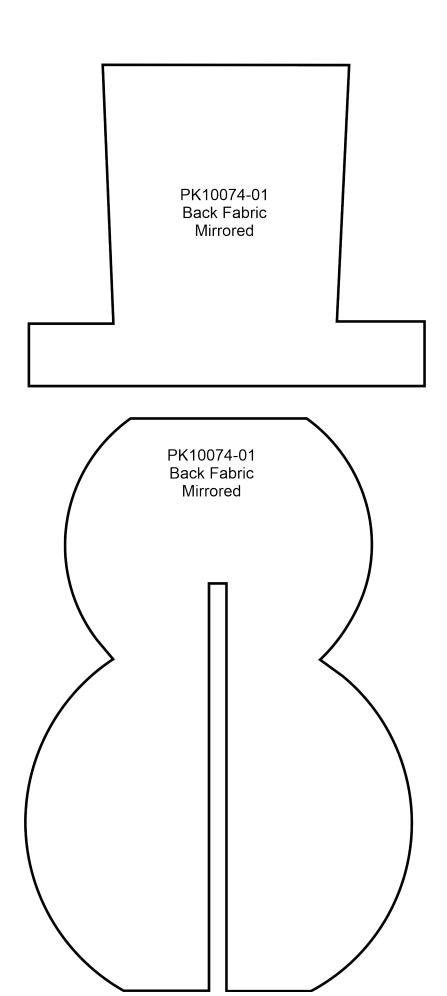


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

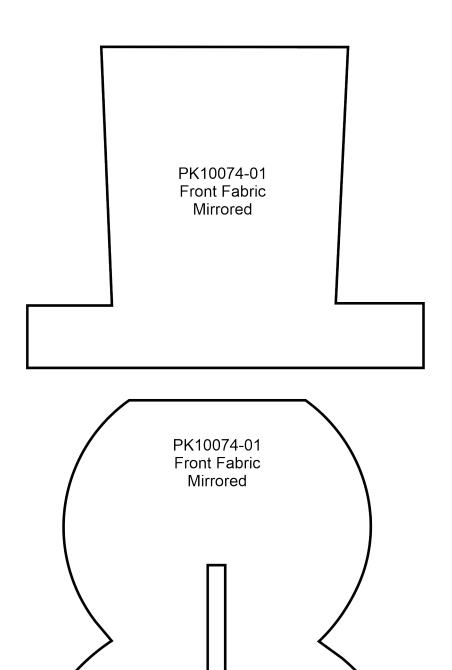


Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.



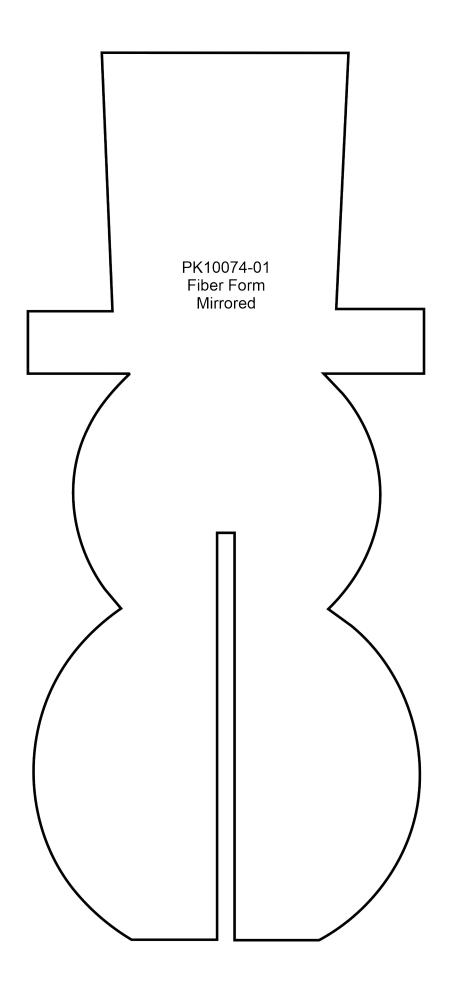


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.




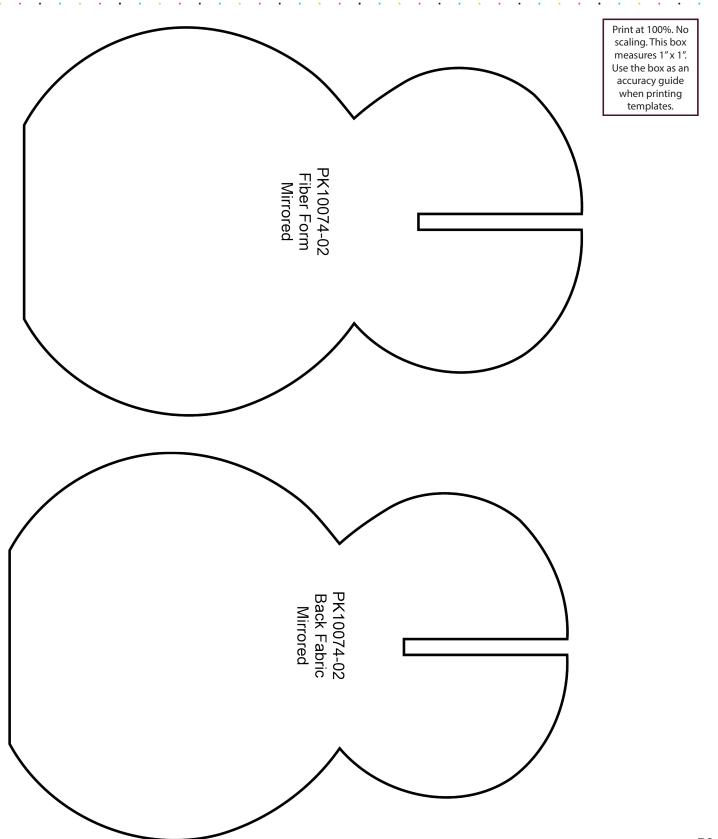



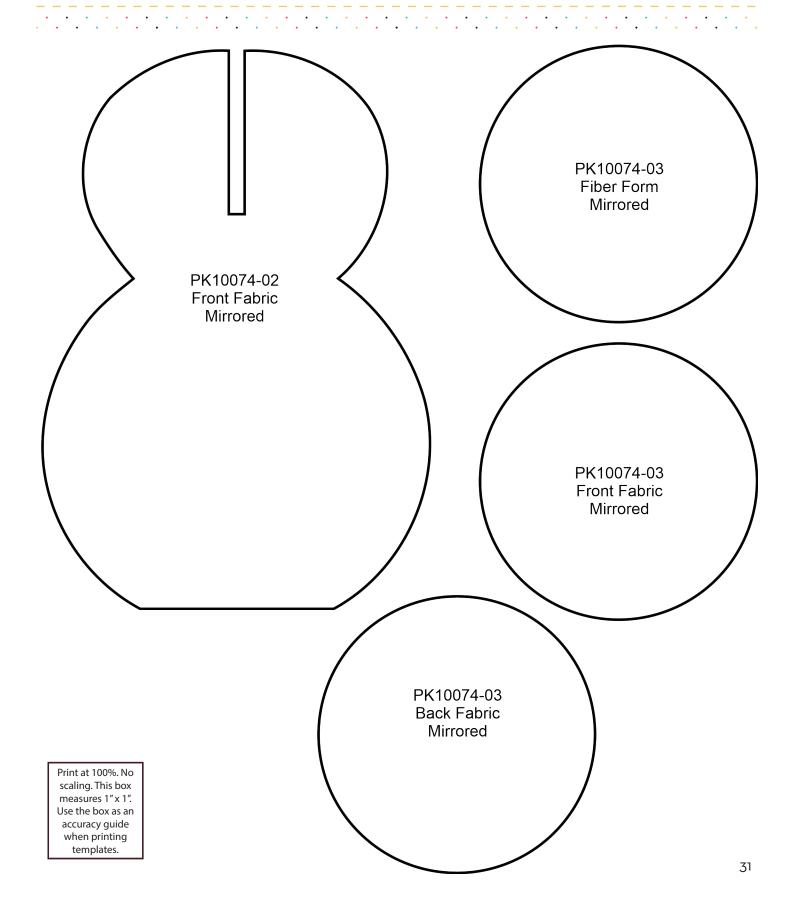



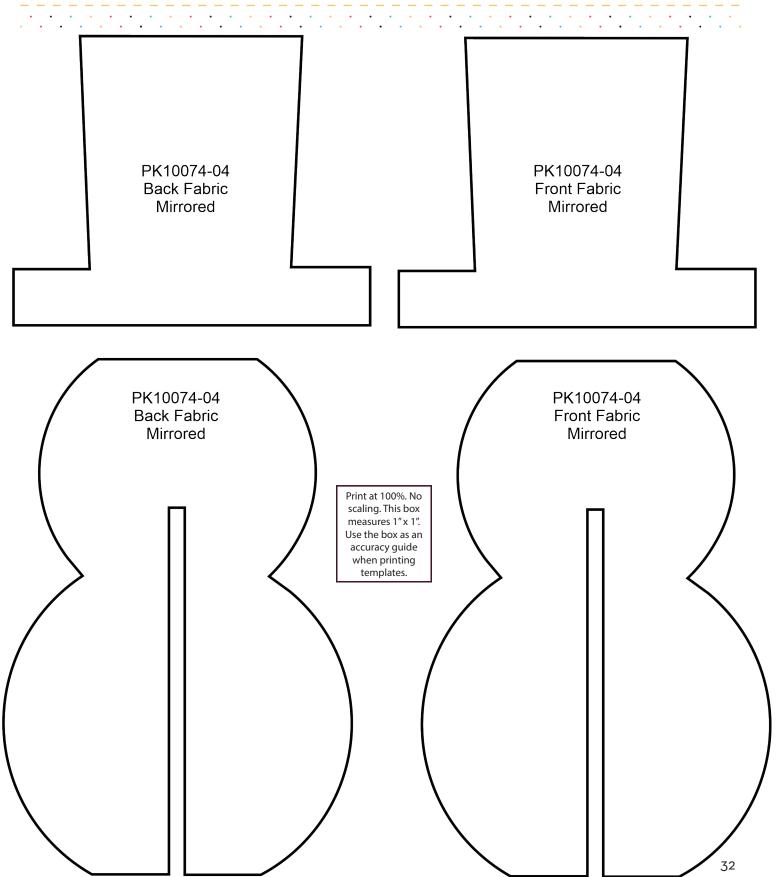



PK10074-04 Fiber Form Mirrored

Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.



Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.

