

Barnyard Puzzles



MATERIALS



Isacord Thread Colors

0010 Silky White

0020 Black

0176 Fog

0600 Citrus

0608 Sunshine

0781 Candlewick

1430 Melon

1704 Candy Apple

1902 Poinsettia

1972 Silvery Grey

2152 Heather Pink

2153 Dusty Mauve

2155 Pink Tulip

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

MATERIALS



Stabilizers

- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway
- OESD Fiber Form
- OESD Applique Fuse and Fix
- OESD Top Cover, Black

Fabrics/Textiles

- OESD Favorite Felt White 3 packages
- OESD Favorite Felt Pink
 1 package
- OESD Favorite Felt Grey
 1 package
- White Quilter's Cotton2 fat quarters

- Pink Quilter's Cotton
 1 fat quarter
- Grey Quilter's Cotton
 1 fat quarter

Note: Fabric amounts are estimates and may result in overages.

Notion & Tools

- OESD Grippy Grid
- OESD Perfect Scoring Tool
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Embroidery Press Cloth
- Embroidery Needle Sharp Size 75/11
- OESD Perfect Embroidery Press Cloth

Isacord Thread Colors

Per the thread chart

SUMMARY



Finished project size: Cow 10" L x 10" W Pig 10" L x 10" W Sheep 10" L x 10" W Chicken 10" L x 10" W






















SUMMARY



Finished project size: Cow 10" L x 10" W Pig 10" L x 10" W Sheep 10" L x 10" W Chicken 10" L x 10" W























General Instructions

The applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Design PK10084-12 is shown here. Fabric and thread requirements will vary by design, but the general technique is the same.

Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

Step 1

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately 1/4" 1/2" outside the printed applique templates.



Step 2

- Cut the Fiber Form 1/4" 1/2" larger than the applique templates.
- Fuse the trimmed templates to the back of the Fiber Form with the paper side of the printed templates up. Hold the iron on the template for 10–15 seconds for a secure fuse.





- Trim the Fiber Form on the outer edges of the black outline.
- Set aside.



Step 4


- Cut the prepared applique fabrics 1/4" 1/2" larger than the templates that are included at the end of the instructions.
- Adhere one layer of StabilStick CutAway to the wrong side of all applique felts and fabrics to provide stiffness to the finished puzzle.








 Using the OESD Grippy Grid, hoop one layer of Aquamesh and one layer of BadgeMaster for all designs.



Step 6

- Load the selected design into the machine.
- Example design is PK10084-12.
- · Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Fiber Form Placement Stitch.





- Remove the hoop from the machine, but NOT the project from the hoop.
- · Place the hoop on a flat surface.
- On the back of the Fiber Form, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- · Place the Fiber Form within the placement stitching.
- Finger press to secure.

Tip: Applique Fuse and Fix is repositionable.





Step 8

- · Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.





Stitch Machine Step 3, Gray Felt Placement Stitch.



Step 10

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared grey felt.
- Tape in place with OESD Expert Embroidery Tape TearAway to secure.



Step 11

- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.





- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess felt as close to the cut line as possible.
 If the outermost stitches (cut line) are cut, the inner
 stitches (tackdown) will hold the applique in place.
 Tip: If the stabilizer is cut or a hole is created while
 trimming the fabric, use OESD Expert Embroidery Tape
 WashAway as a patch.



Step 13

- Return the hoop to the machine.
- Stitch Machine Step 5, White Felt Placement Stitch.



Step 14

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared white felt.
- Tape in place.





- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.



Step 16

- Remove the hoop from the machine, but NOT the project from the hoop.
- Trim the excess fabric as close to the cut line as possible.



Step 17

- Completely cover the design with black OESD Top Cover Permanent Topping.
- Tape in place.
- Note: Top Cover helps prevent the felt from showing through the black stitching.





- · Return the hoop to the machine.
- Stitch Machine Step 7, Face.



Step 19

- Remove the hoop from the machine, but NOT the project from the hoop.
- Tear away the excess Top Cover from the black stitching.



___ Step 20

- Return the hoop to the machine.
- Stitch Machine Step 8, Cheek.
- Stitch Machine Step 9, Eye Detail.





- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over and place the prepared grey applique felt, right side up, completely covering the design.
- Carefully tape to secure. Tip: Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.



Step 22

- Return the hoop to the machine.
- Stitch Machine Step 10, Back Fabric Cut Line and Tackdown.



Step 23

- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over. Trim the excess felt as close to the cut line as possible.





- Return the hoop to the machine.
- Stitch the remaining machine steps per the thread cart with matching bobbin thread.



Step 25

- When the design is complete, remove the project from the hoop.
- Trim the stabilizer 1/4" 1/2" outside the design.
- · Stitch the remaining puzzle pieces.



ASSEMBLY



Step 26

- Rinse each piece in warm running water until the puzzle pieces are only slightly tacky.
- Place right side down on a non-stick surface to dry.
 Parchment paper or a cooling rack work well. Dry completely.
- Once dry, press right side down on an OESD Perfect Embroidery Press Cloth.



Step 27


• The project is complete. Enjoy!






ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

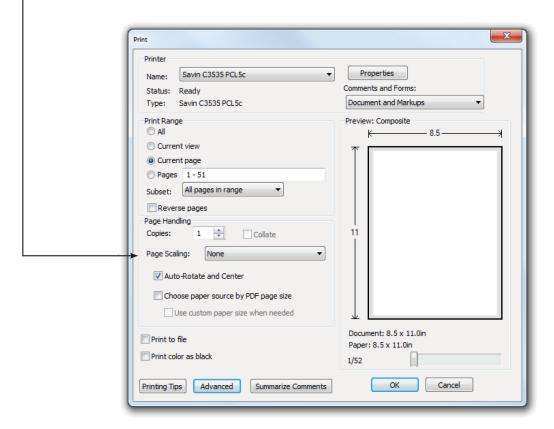


TO SAVE PAPER


Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.






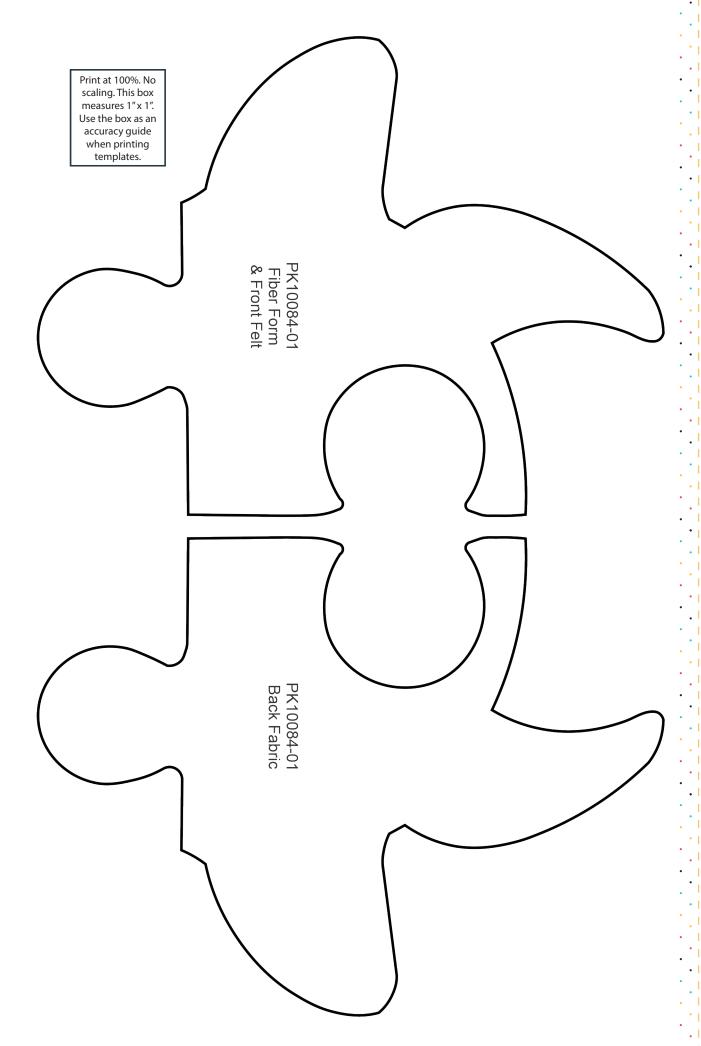




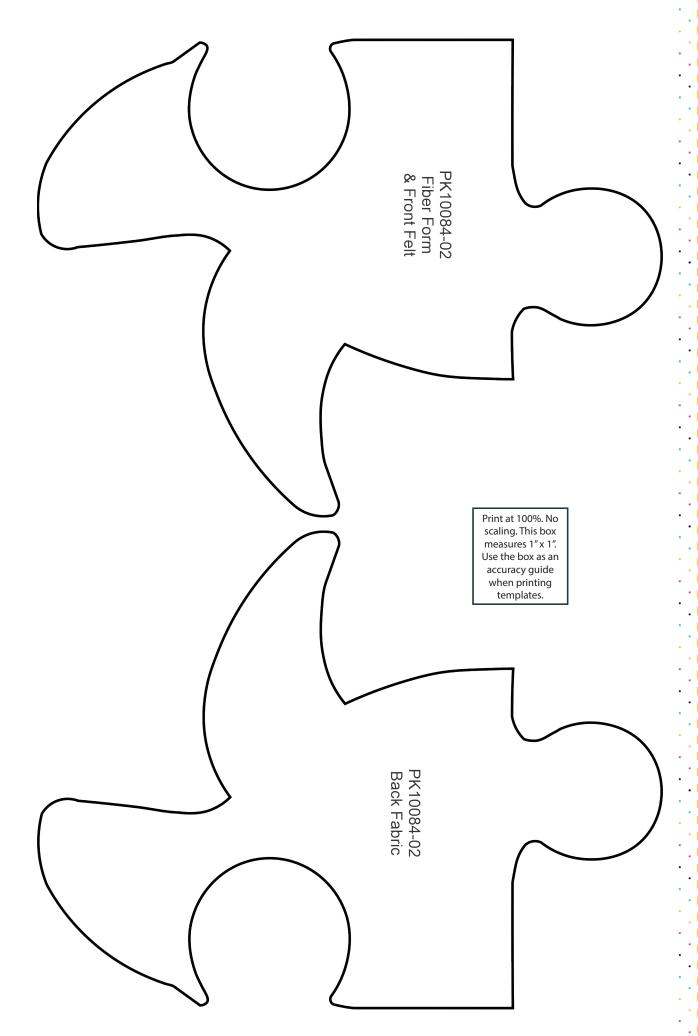




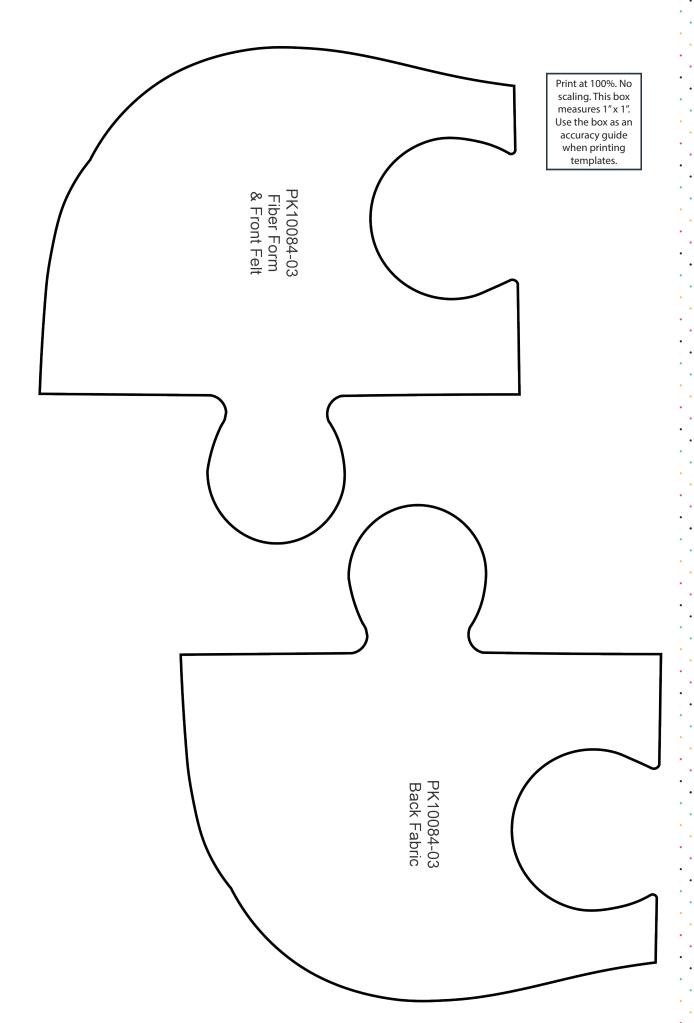




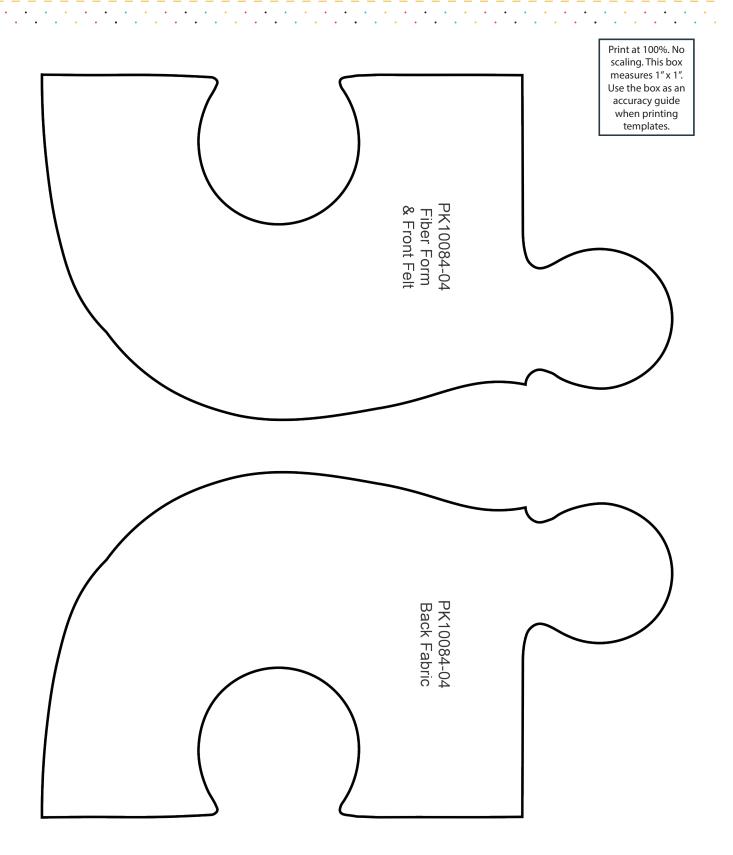




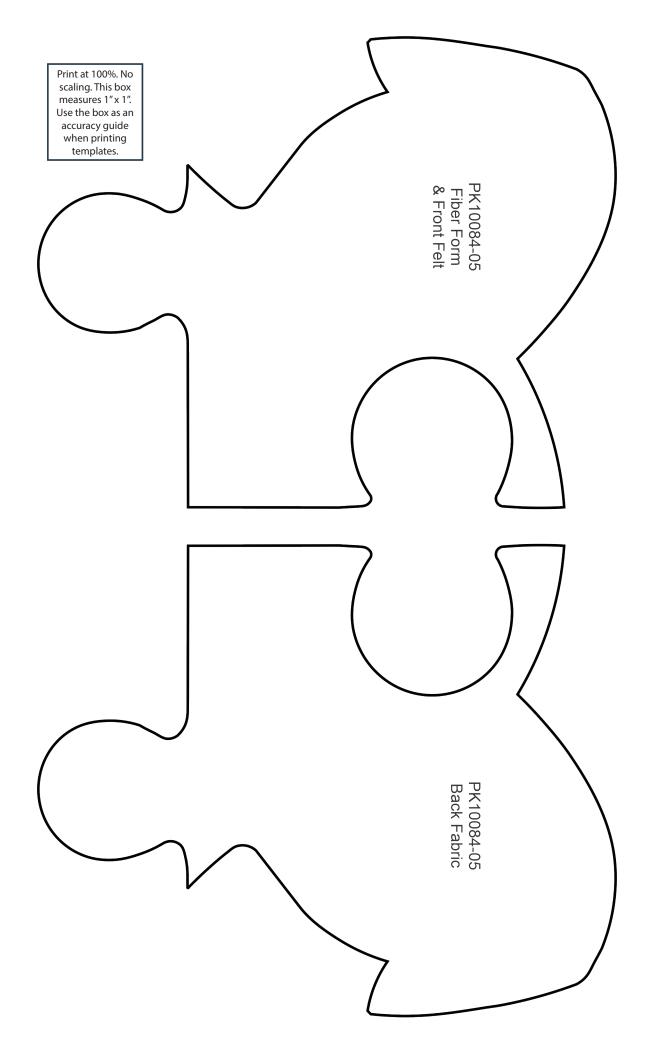




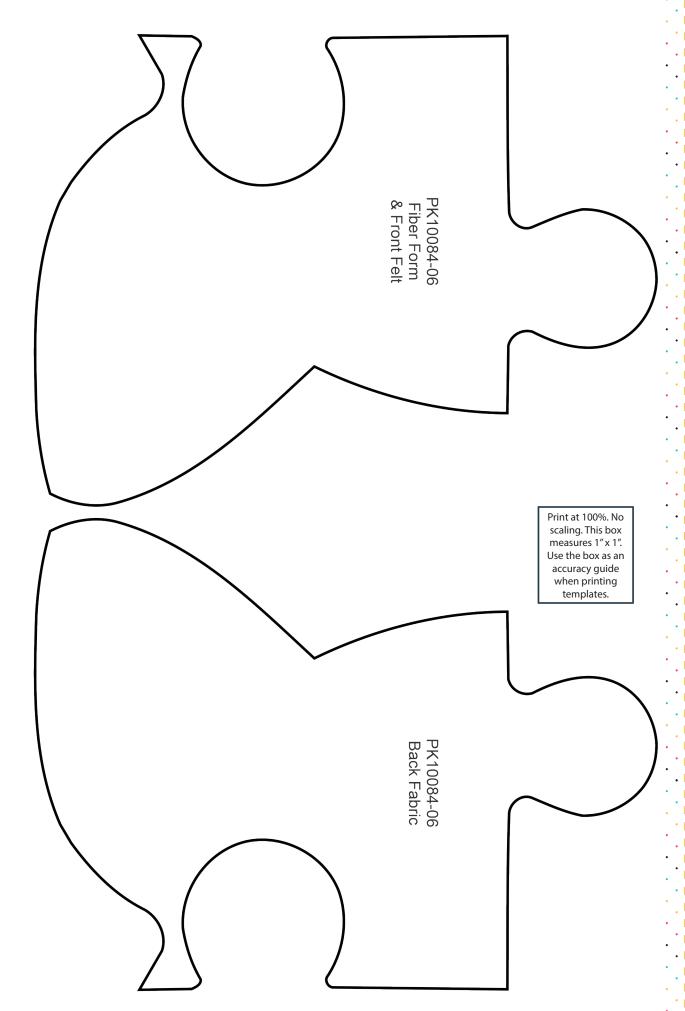




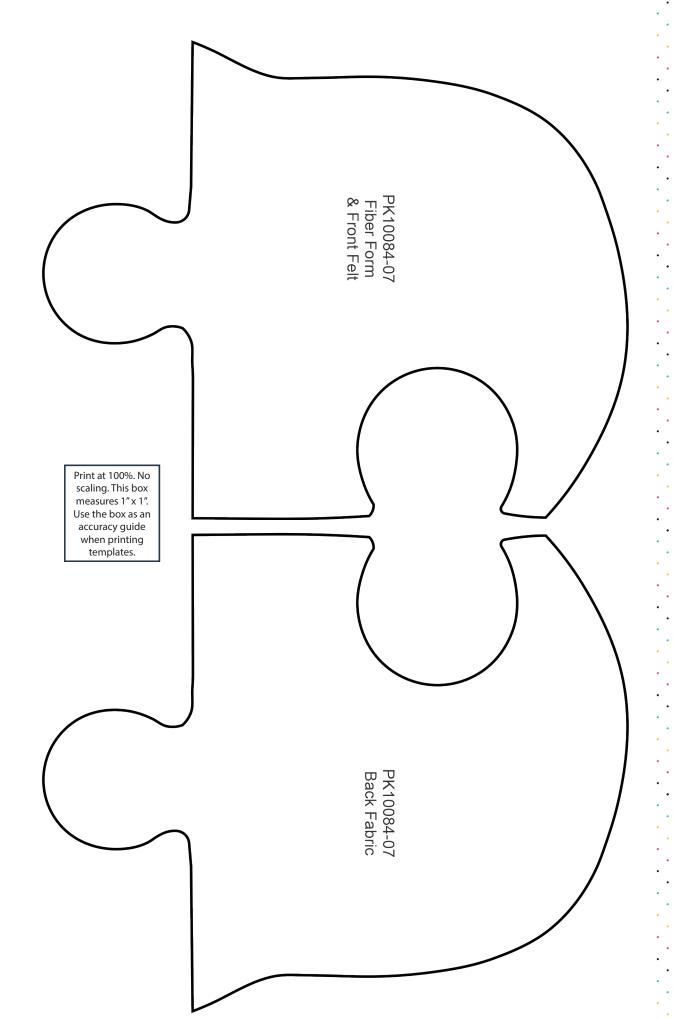




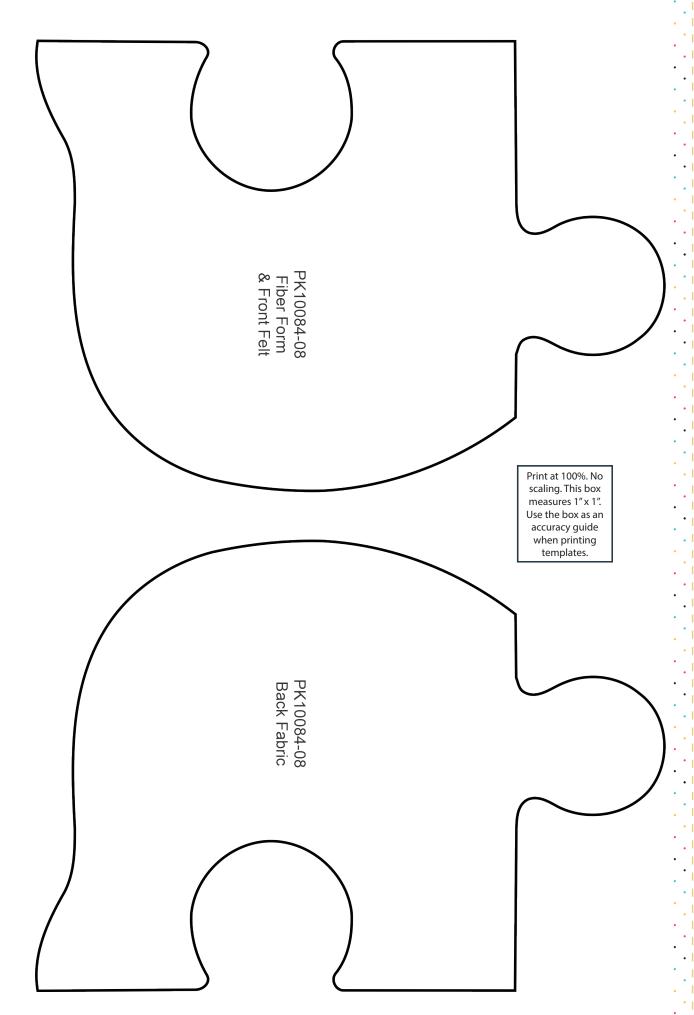




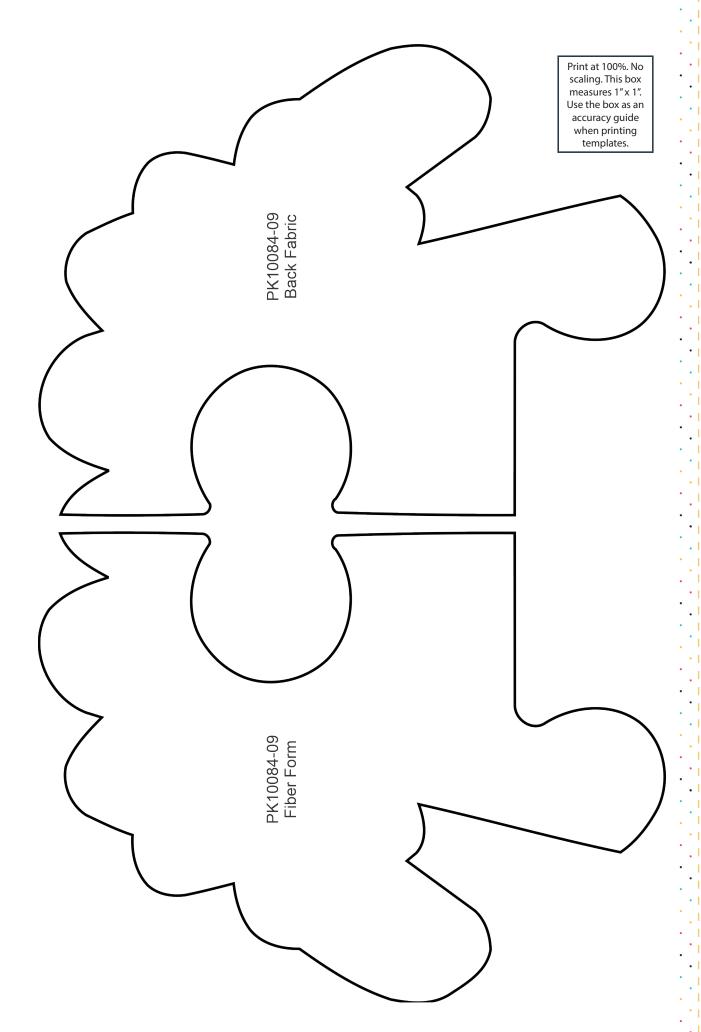


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

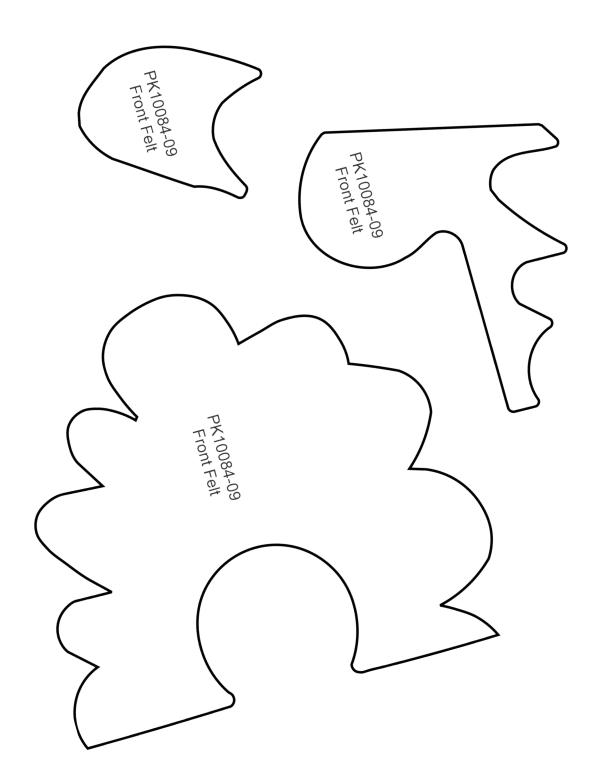




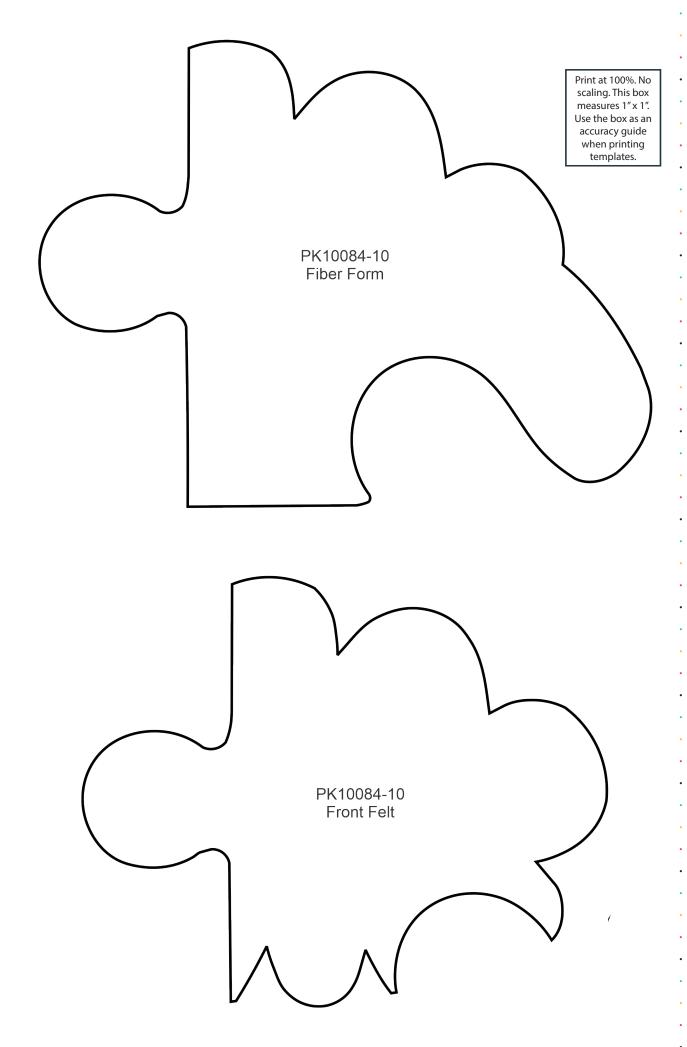

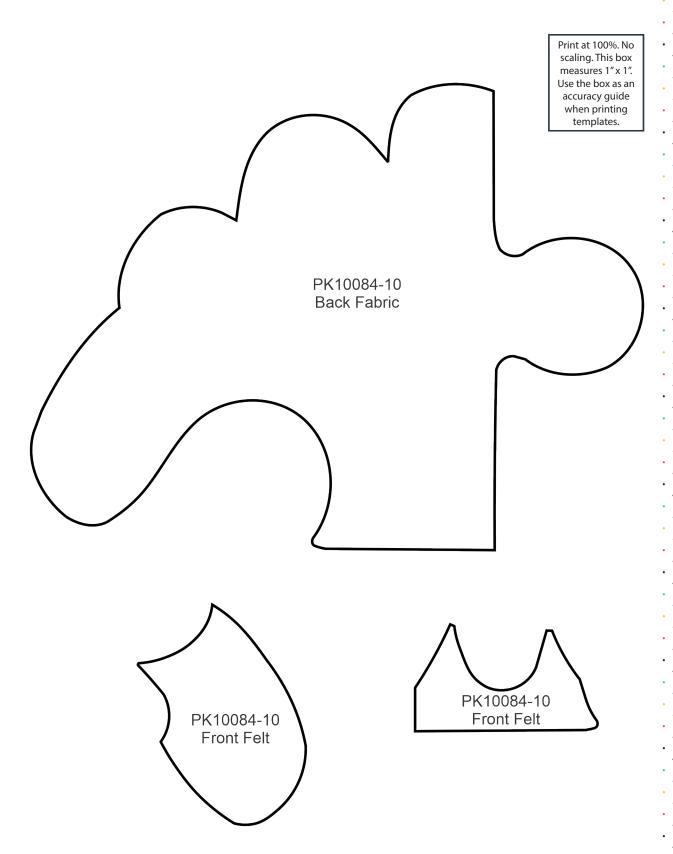






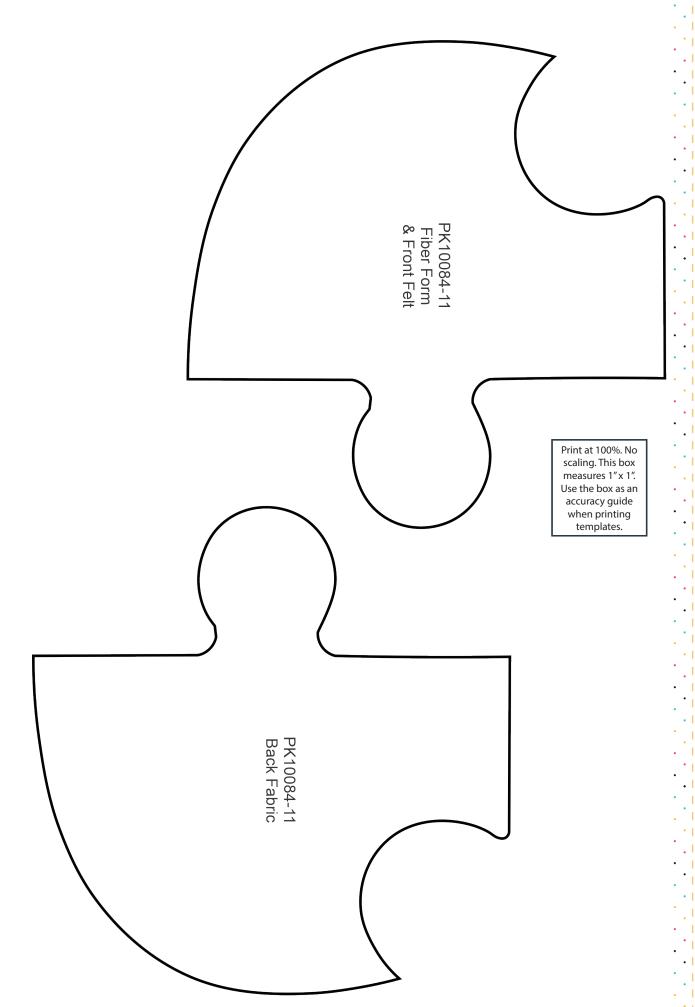




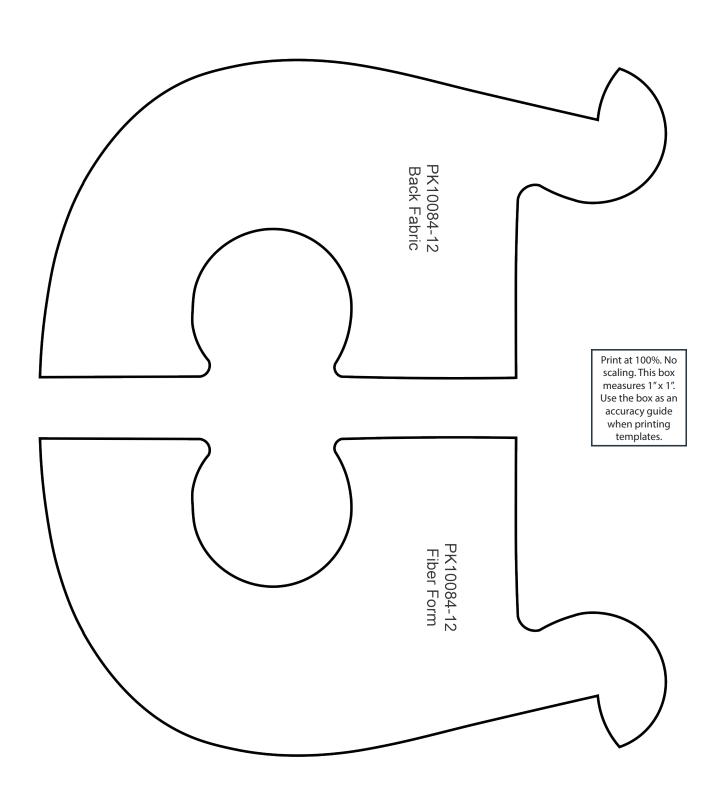





Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

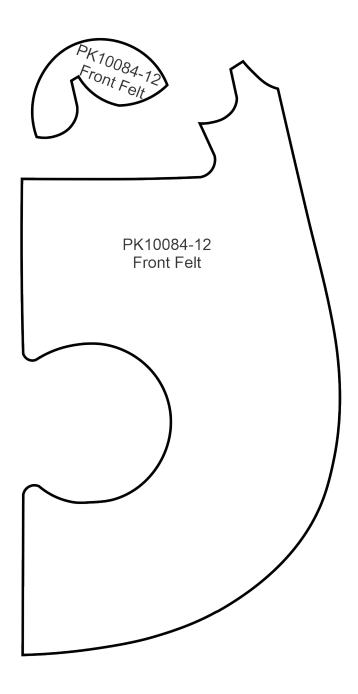



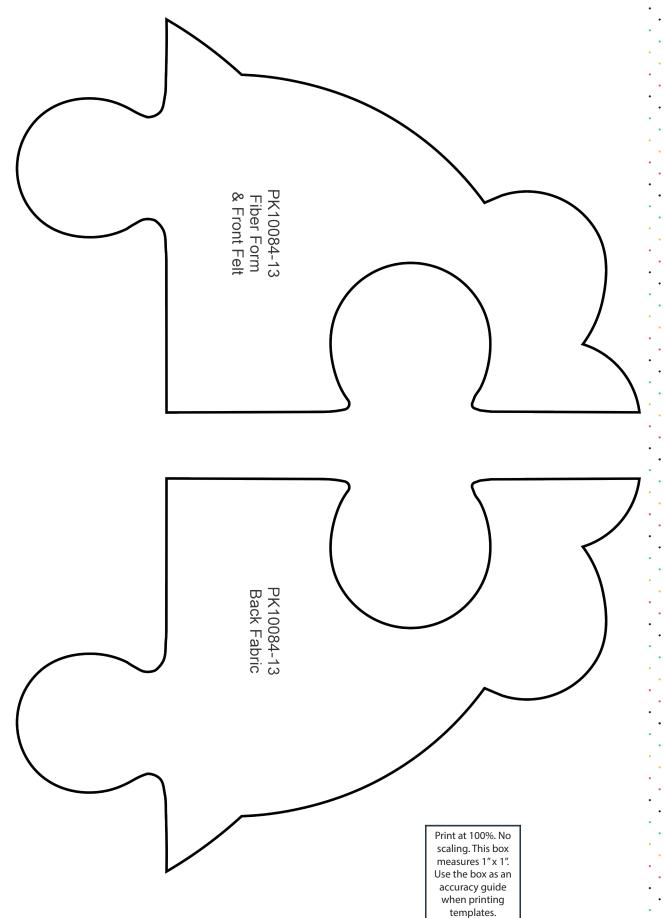




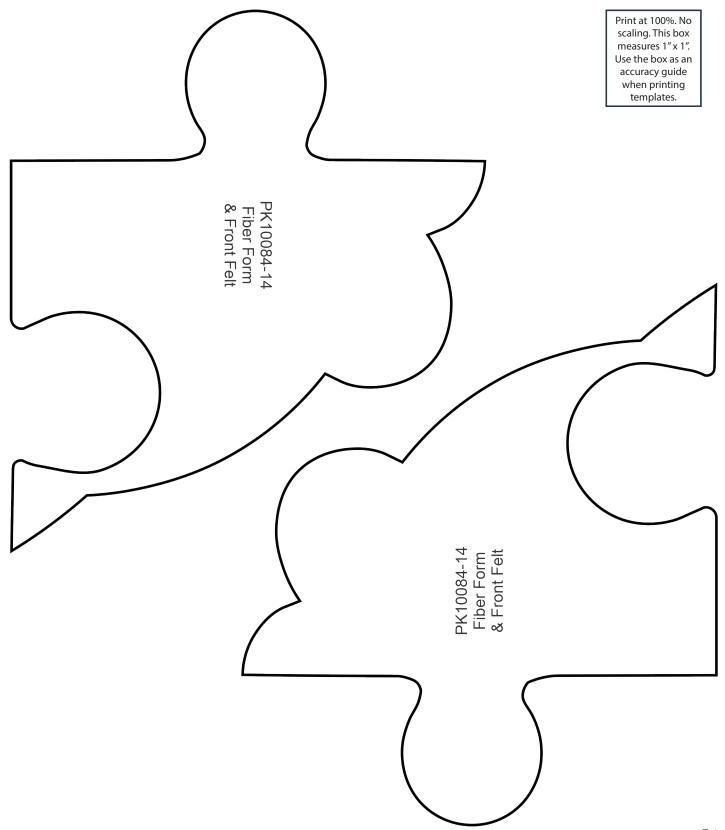




Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.

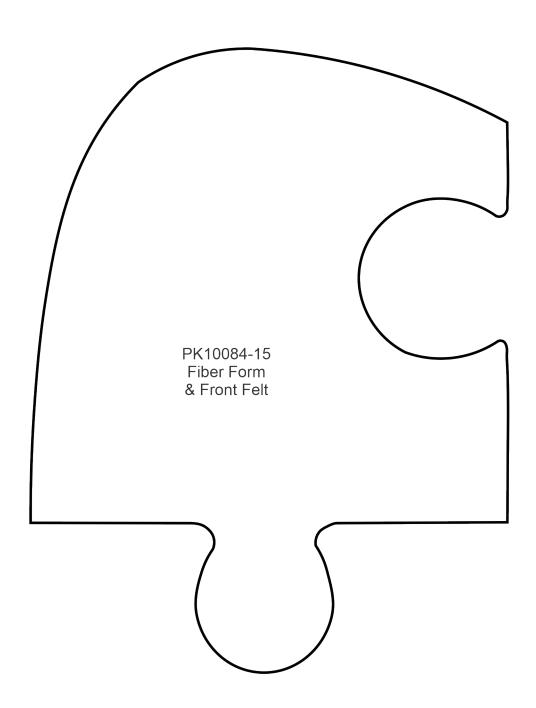



Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.

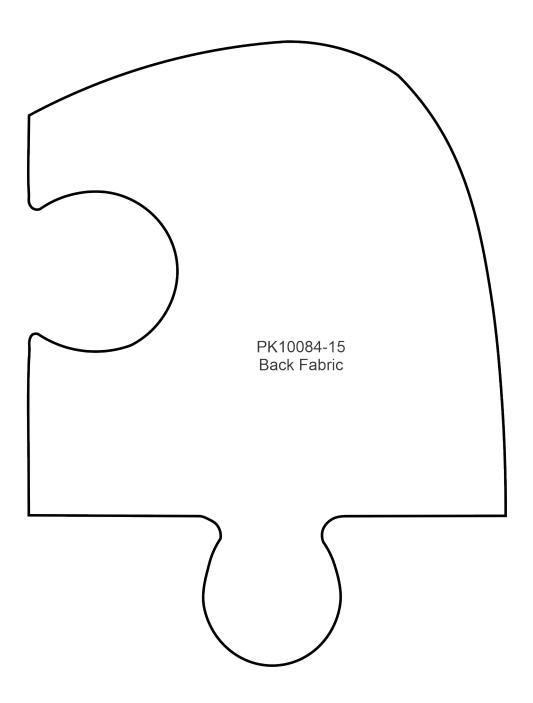


APPLIQUE PATTERNS PK10084-16 Fiber Form & Front Felt Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.


PK10084-16 Back Fabric






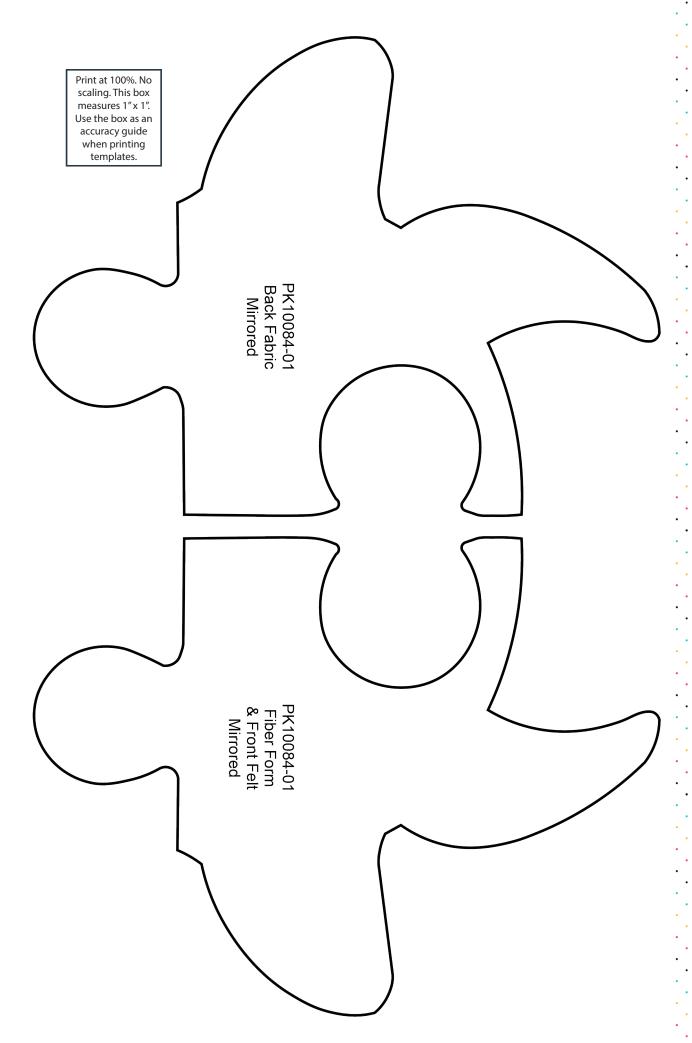




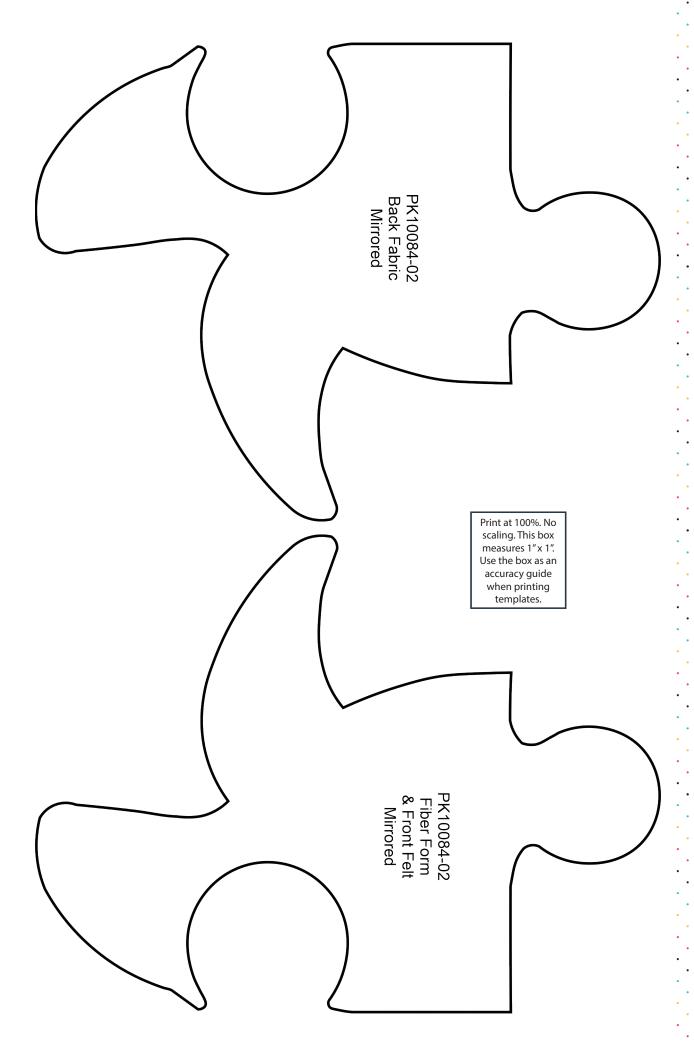




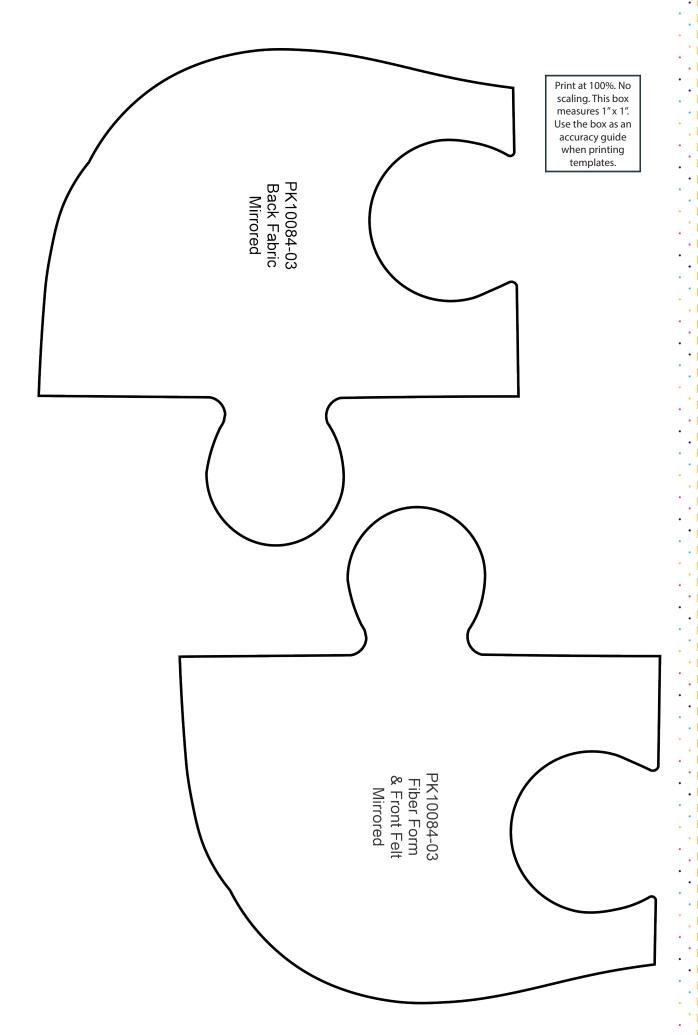




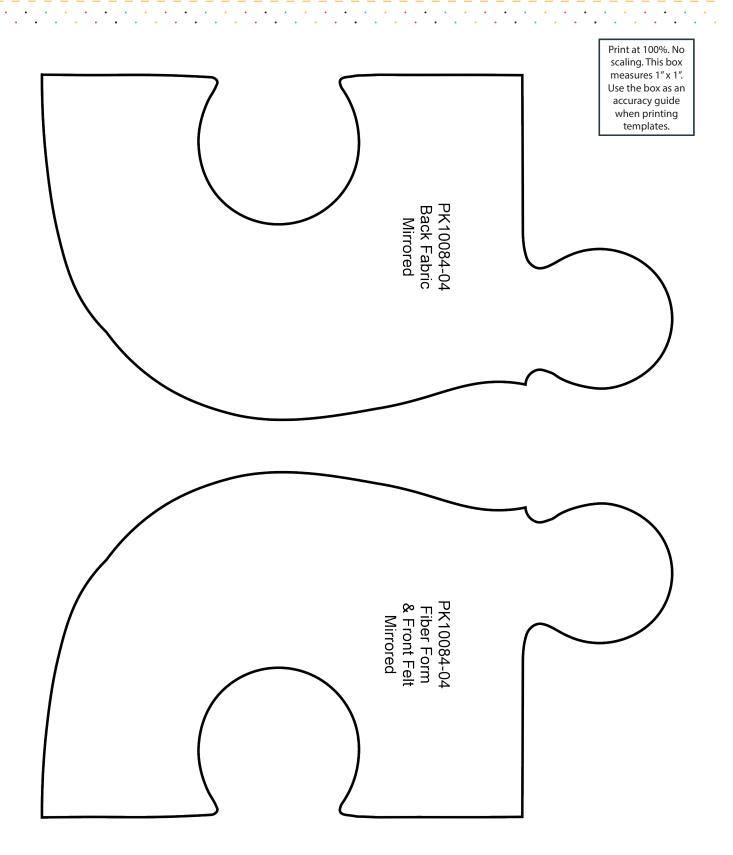




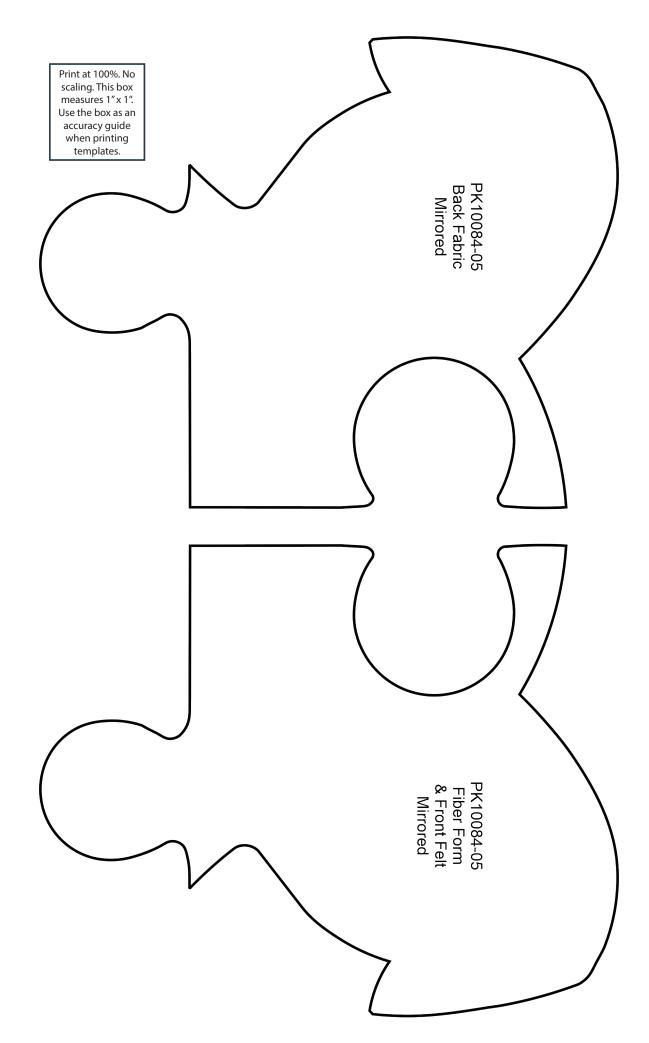




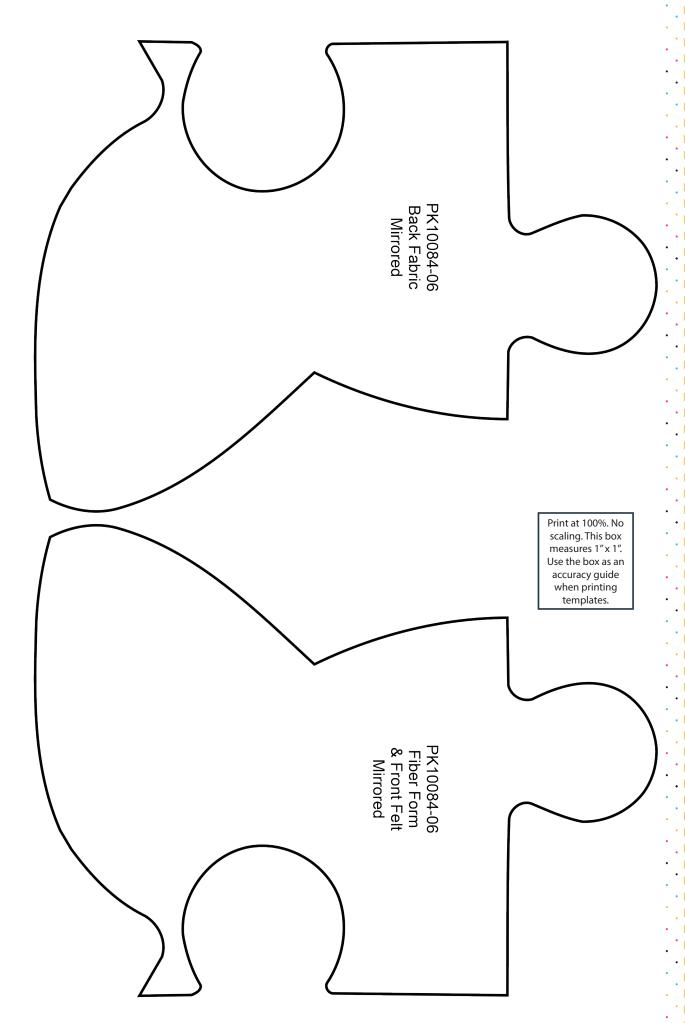



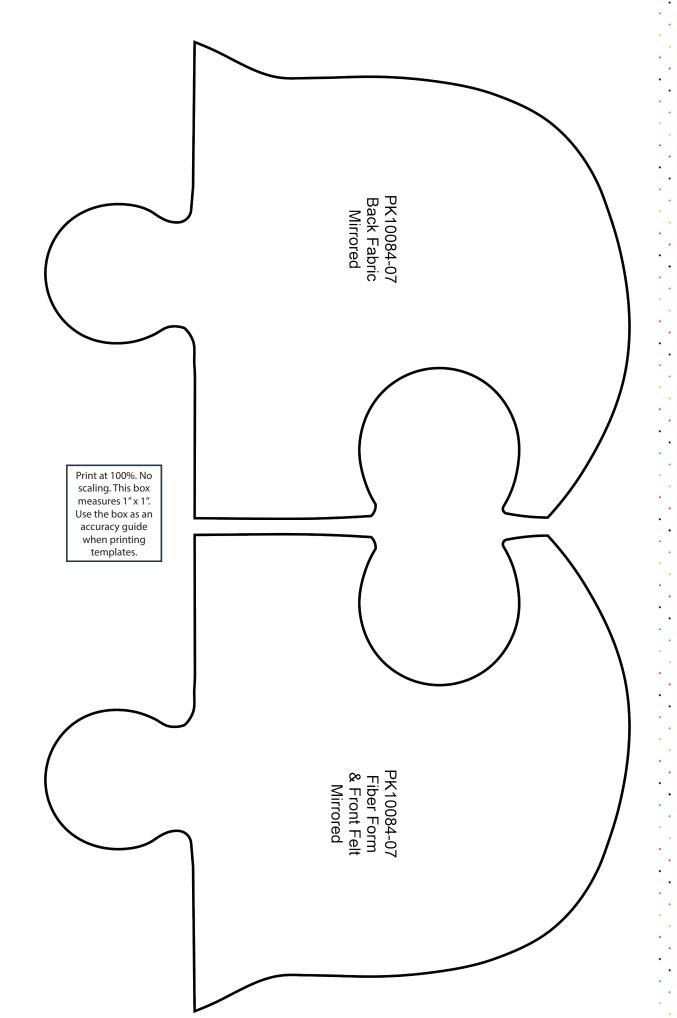




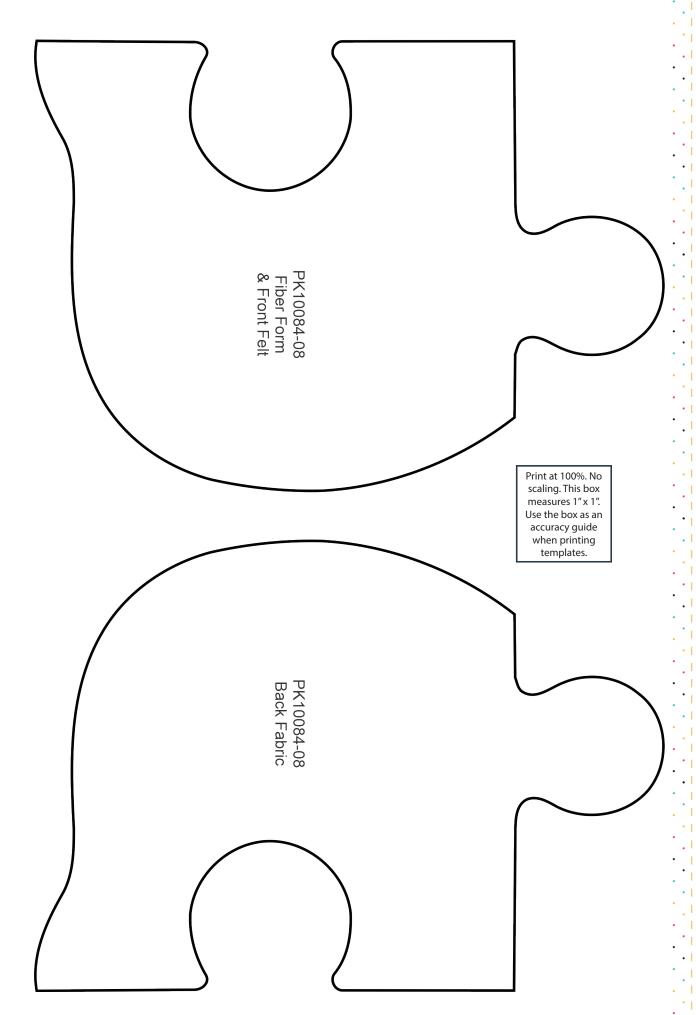





Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

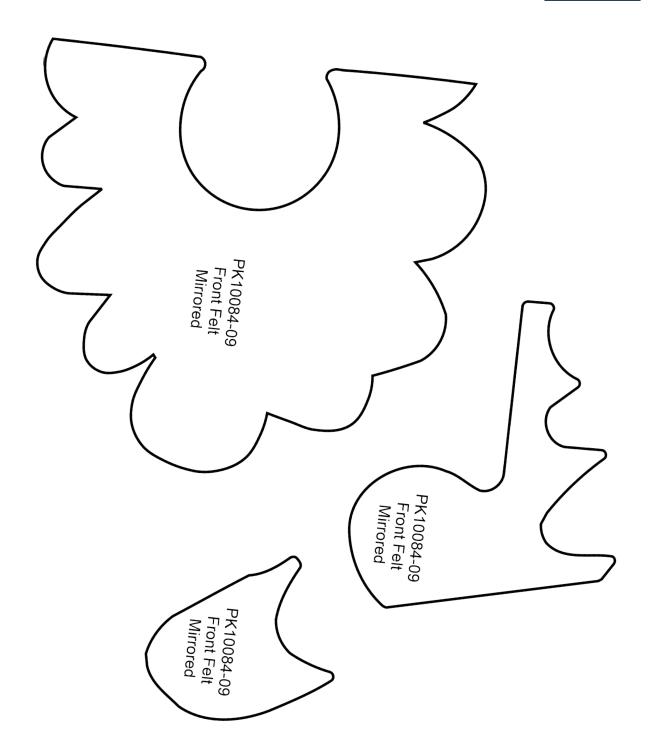




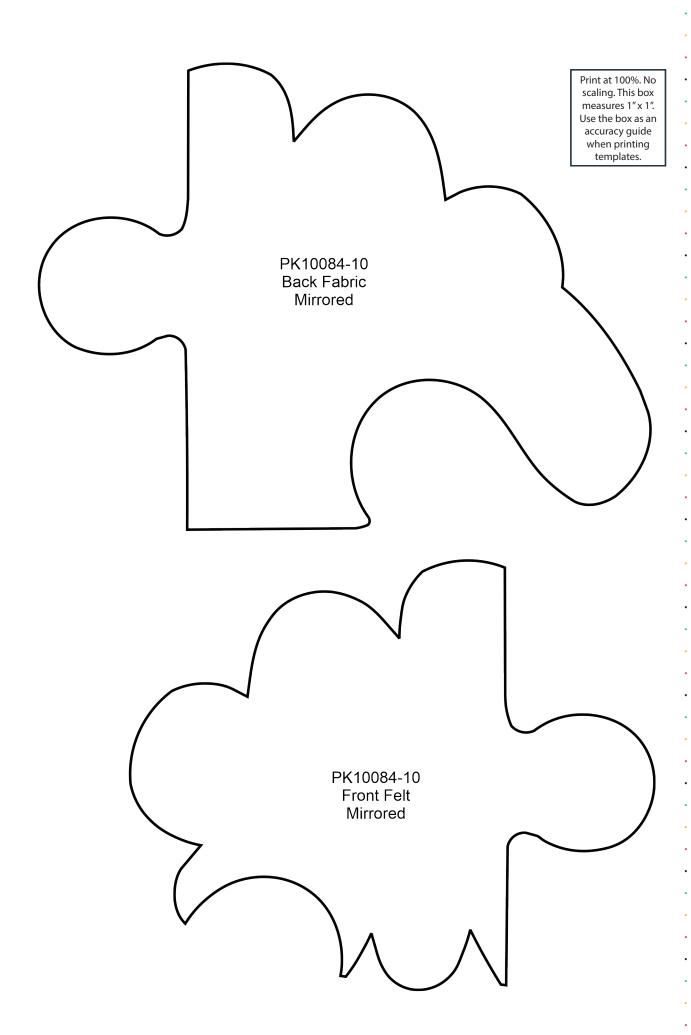

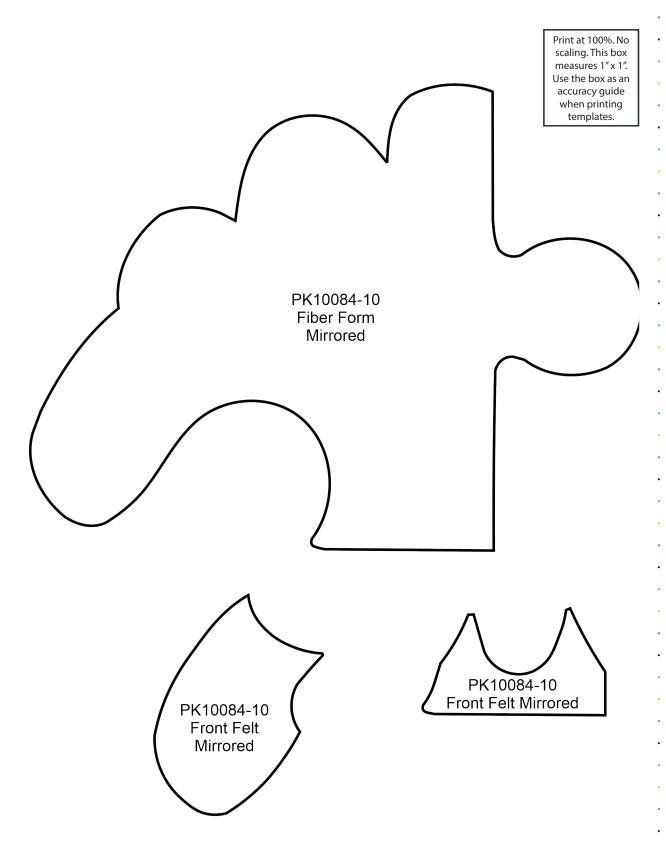






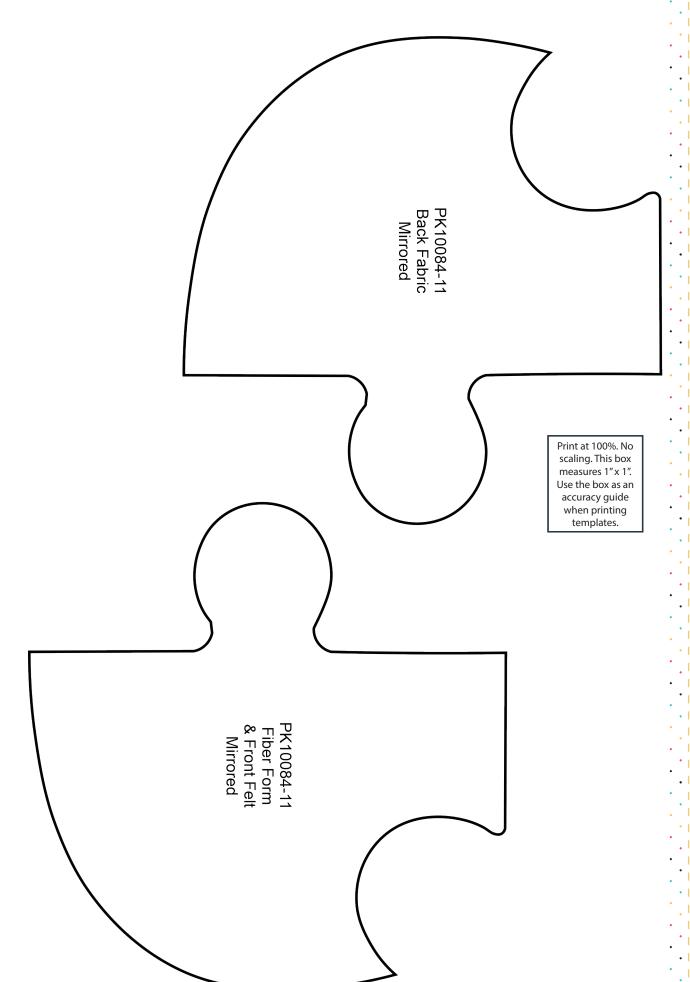




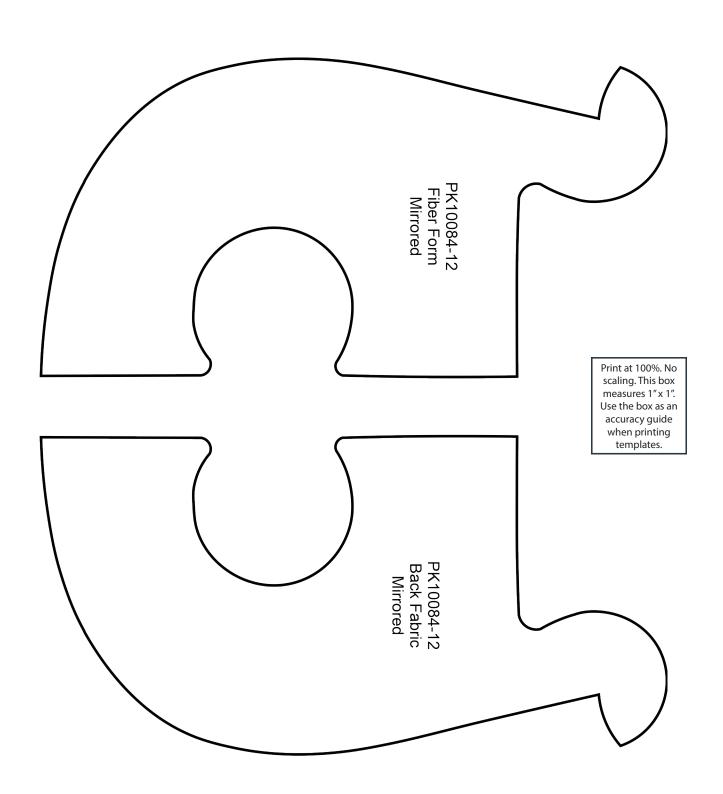


............




Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

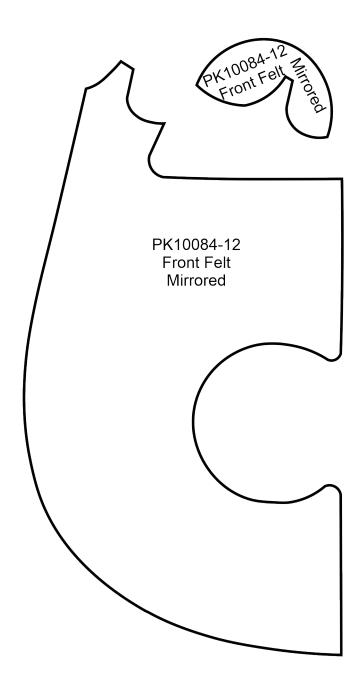

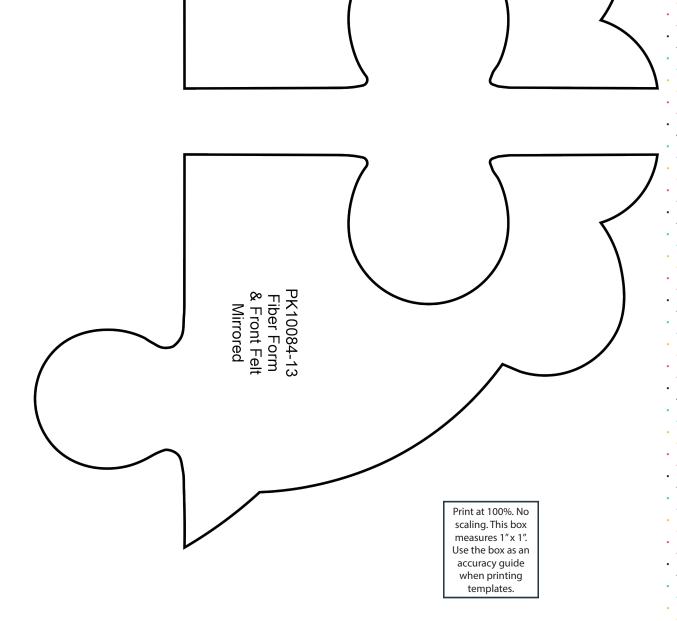


PK10084-13 Back Fabric Mirrored



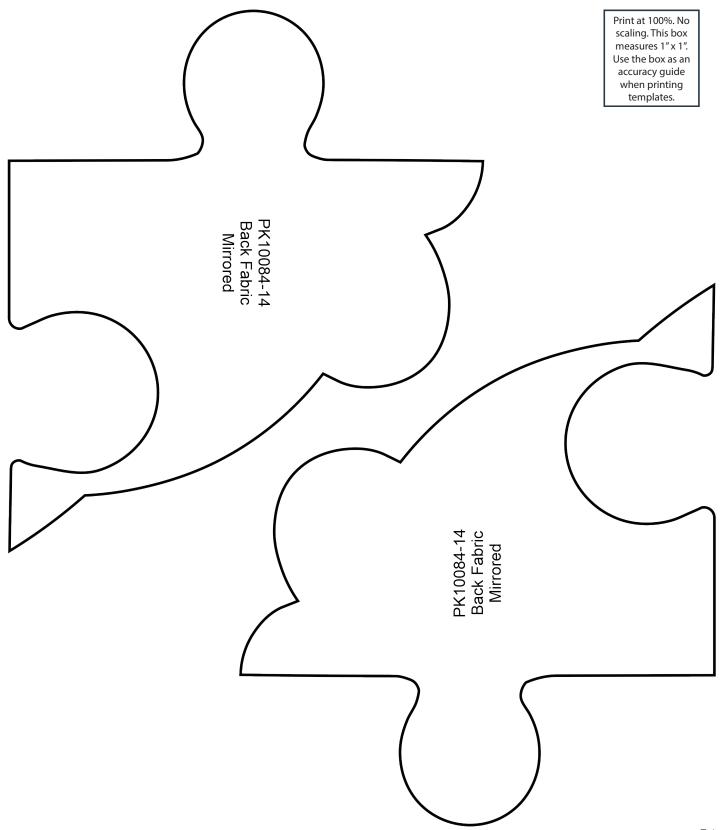




Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.

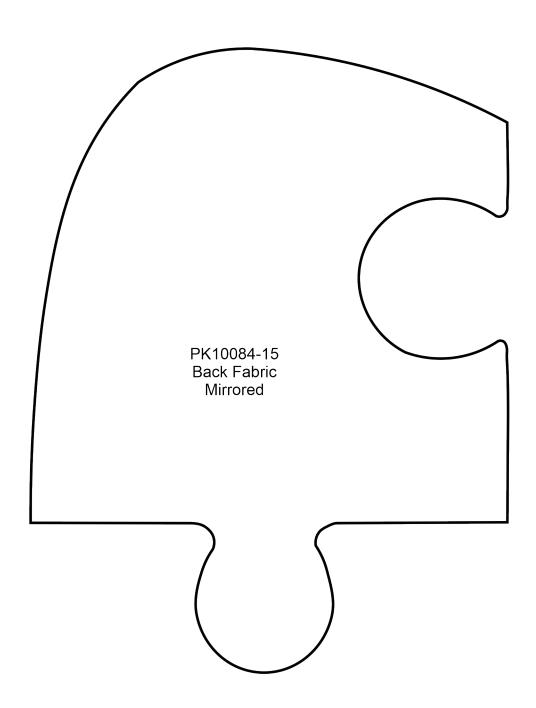



Print at 100%. No scaling. This box measures 1"x 1". Use the box as an accuracy guide when printing templates.

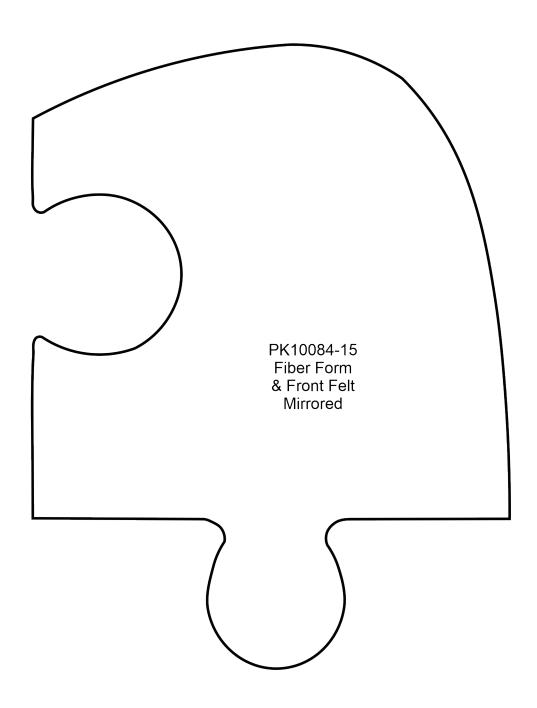

PK10084-16 Back Fabric Mirrored Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates. PK10084-16 Fiber Form & Front Felt Mirrored

