

Split Seam Lace



Collection No. PK10158
4 Designs

Isacord Thread Colors

0010 Silky White
0622 Star Gold
2510 Roseate
4421 Light Mallard
5822 Kiwi

 **Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.**

Stabilizers

- OEESD AquaMesh Plus WashAway

Fabrics/Textiles

- Sweatshirt or garment

Notion & Tools

- OEESD Grippy Grid
- OEESD Expert Embroidery Tape WashAway
- OEESD Perfect Embroidery Press Cloth
- Embroidery Needle Ballpoint 80/12

Thread Colors

- Per thread chart



SUMMARY



PK10158-01



Design Size:
5.82 X 4.70 in.

PK10158-02



Design Size:
5.82 X 4.84 in.

PK10158-03



Design Size:
5.82 X 4.99 in.

PK10158-04



Design Size:
5.82 X 5.39 in.

GENERAL INSTRUCTIONS



The instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Design PK10158-01 is shown here. Fabric and thread requirements will vary by design, but the general technique is the same.

All designs are stitched with matching thread, top and bobbin.

 **Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.**


Step 1

- Using the OESD Grippy Grid, hoop one layer of AquaMesh Plus paper (shiny) side up for all designs.
- Use the OESD Perfect Scoring Tool to score and remove the paper.
- Remove the paper to reveal the adhesive surface.

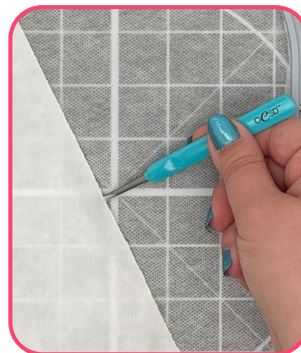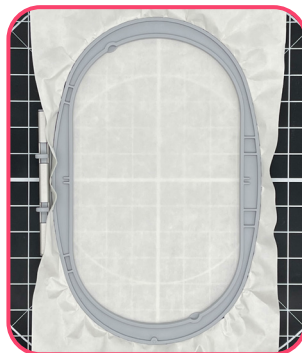

Step 2

- Load the selected design into the machine.
- Example design is PK10158-01.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Garment Placement Guide.

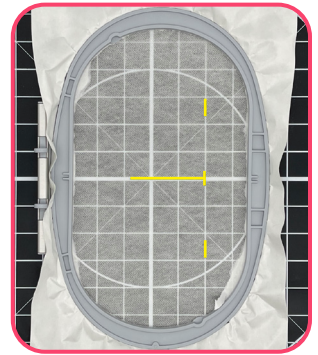


 **Tip: Trim any jump stitches so they are not embroidered into the white lace at a later machine step.**

Step 3

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Align the side seam of the garment with the horizontal placement line.
- Align the hem of the garment with the vertical placement line.
- Finger press to secure.
- Use OESD Expert Embroidery Tape WashAway to tape down the hem. This allows the presser foot to glide over the hem easier.

 **Tip: The Grippy Grid lines can assist with centering the garment.**

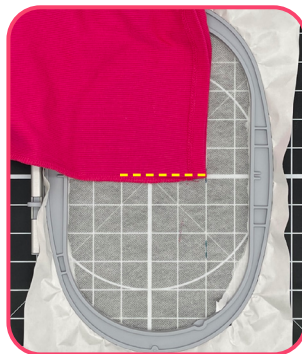

☐ Step 4

- Return the hoop to the machine.
- Stitch Machine Step 2, Seam Cut Line and Tackdown.



☐ Step 5

- Remove the hoop from the machine but NOT the project from the hoop.
- Trim the garment as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the garment in place.

 **Note: Be sure to trim on the side that will cut away just a small portion of the garment and leave the body of the garment intact.**

 **Tip: If the stabilizer is cut or a hole is created while trimming, use Expert Embroidery Tape WashAway as a patch.**



☐ Step 6

- Return the hoop to the machine.
- Stitch Machine Step 3, Cover Stitch and Detail **with matching bobbin thread.**
- Stitch Machine Step 4, Cover Stitch and Lace Detail **with matching bobbin thread.**



☐ Step 7

- When the design is complete, remove the project from the hoop.
- Trim the stabilizer 1/4" - 1/2" outside the design.



FINISHING TOUCHES



☐ Step 8

- Rinse in warm running water until the design is only slightly tacky.
- Place right side down on a non-stick surface to dry. Parchment paper or a cooling rack work well. Dry completely.
- Once dry, press right side down on an OESD Perfect Embroidery Press Cloth.



 **Tip: Use a garment bag and wash on delicate in the clothes washer.**

☐ Step 9

- The project is complete. Enjoy!

