

Cuddly Cord Keepers

Collection No. PK50041 4 Designs

STIT

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2024 OESD, LLC. All rights reserved.

MATERIALS





Isacord Thread Colors

0020 Black 0101 Eggshell 0138 Heavy Storm 0532 Champagne 0853 Pecan 0945 Pine Park 2152 Heather Pink 2520 Garden Rose 2532 Pretty in Pink 2711 Dark Current 5643 Green Dust 5832 Celery 5912 Erin Green

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

MATERIALS





Stabilizer

OESD Medium Weight TearAway

Fabrics/Textiles

- Design PK50041-01: OESD Luxe Sparkle Vinyl Pink 10" x 4" (2)
- Design PK50041-02: OESD Luxe Sparkle Vinyl Gold 10" x 4" (2)
- Design PK50041-03: OESD Luxe Sparkle Vinyl Grass Green 10" x 4" (2)
- Design PK50041-04: OESD Luxe Sparkle Vinyl White 10" x 4" (2) Note: If cut at this size, two cord keepers can be made from one roll of Luxe Sparkle Vinyl.

Notion & Tools

- OESD Expert Embroidery Tape TearAway
- **OESD** Grippy GRID
- **OESD MiniMAT**
- **OESD** Perfect Embroidery Press Cloth
- Craft Knife
- Embroidery Needle Sharp 75/11

Isacord Thread Colors

- Per the thread chart
- Match bobbin thread to top thread

SUMMARY







 Image: State Stat



General Instructions

The freestanding applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same. All designs are stitched with matching thread, top and bobbin.

Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

Step 1

Hoop one layer of Medium Weight TearAway for all designs.



Step 2

- Load selected design into the machine.
- Example design is PK50041-03.
- Thread the machine per the thread chart.
- Match bobbin thread to all top threads.
- Place the hoop on the machine.
- Stitch Machine Step 1, Front and Back Vinyl Placement Stitch.



Step 3

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Turn the hoop over.
- Completely cover the placement stitch with the • prepared vinyl.
- Note: The vinyl is almost the exact size of the • placement stitch, so place carefully.
- Carefully tape to secure.
- Tip: Avoid pushing too hard on the stabilizer to prevent • it from dislodging from the hoop.

Step 4

- Turn the hoop over.
- Completely cover the placement stitch on the front with the prepared vinyl.
- Tape in place to secure.

 $\times \mid \heartsuit \square \times$










.



Step 7

 $\heartsuit \cap \times \blacksquare$

- Return the hoop to the machine.
- Stitch Machine Step 2, Tackdown.





- When the design is complete, remove the project from the hoop.
- Trim excess stabilizer and vinyl inside the Tackdown Line.







. .



OCSD DESIGN PACK



Step 8

- Use the OESD MiniMAT and a craft knife to cut through all the layers of the slots, including the mouth. Tip: Take care to not cut the satin stitching.
- Reference the Cutting Guide on page 9.



Step 9

• Press right side down on a Perfect Embroidery Press Cloth.



Step 10

- Wrap the cord keeper around the cord and pull the tongue through mouth and slots.
- The cord keeper is complete. Enjoy!



PUNCH TOOL GUIDES OPSIGN

••••

••••

.



• .


• • • • •

.



••••••


.

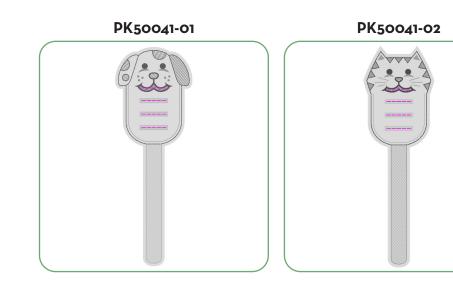

.

۰.

.

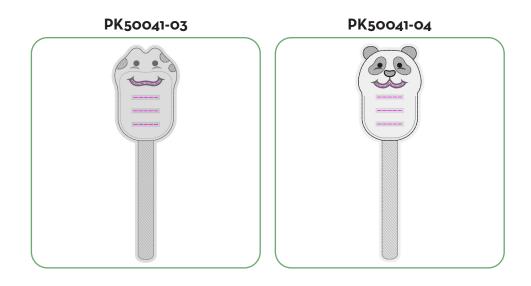



When printing this document, any page s dialog box must be turned OFF or set to their actual size. Images not printed at	NONE so that your files will print
Print	×
Printer	
Name: Savin C3535 PCL5c	Properties
Status: Ready	Comments and Forms:
Type: Savin C3535 PCL5c	Document and Markups 🔹
Print Range	Preview: Composite
Current view	k 8.5 3
Current page	\uparrow
© Pages 1-51	
Subset: All pages in range	
Reverse pages	
Page Handling	
Copies: 1 Collate	11
Page Scaling: None	
Auto-Rotate and Center	
Choose paper source by PDF page size	
Use custom paper size when needed	
	Document: 8.5 x 11.0in
	Paper: 8.5 x 11.0in
Print to file	

· · · · · · · · · · · · · · ·

۰.

F

• • •

• . •

•.

stitche

TO SAVE PAPER Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image. Print Range Image: Image: Image: Image Image: I


•

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2024 OESD, LLC. All rights reserved.


Pages 1 - 51
Subset: All pages in range

Reverse pages




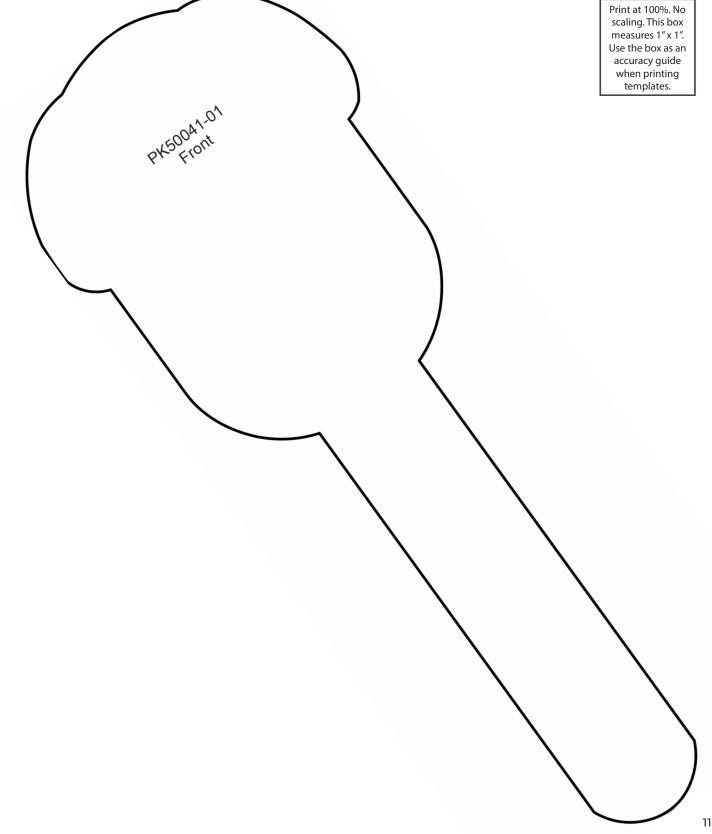




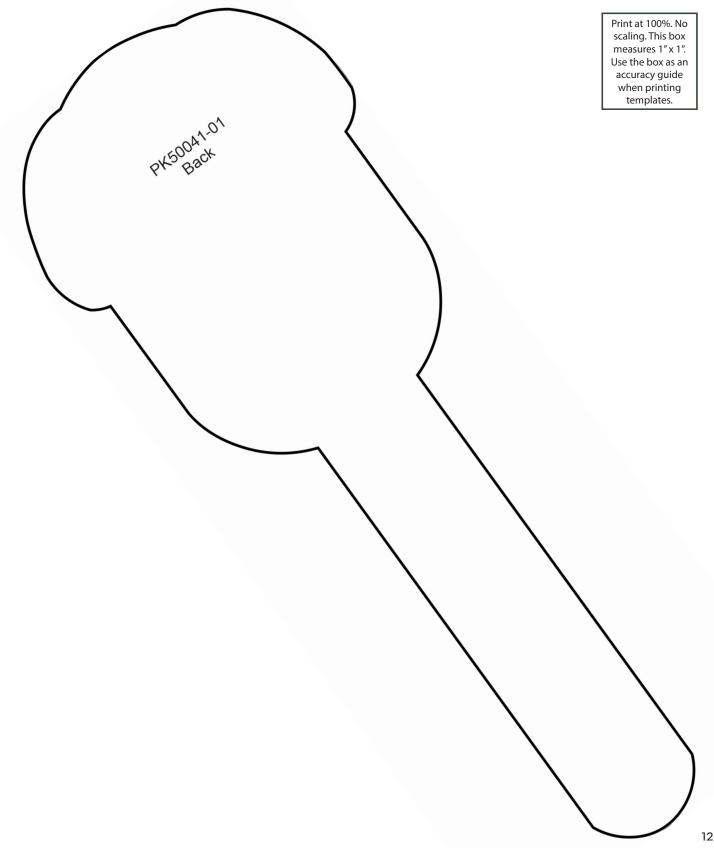


APPLIQUE PATTERNS OPSIGN

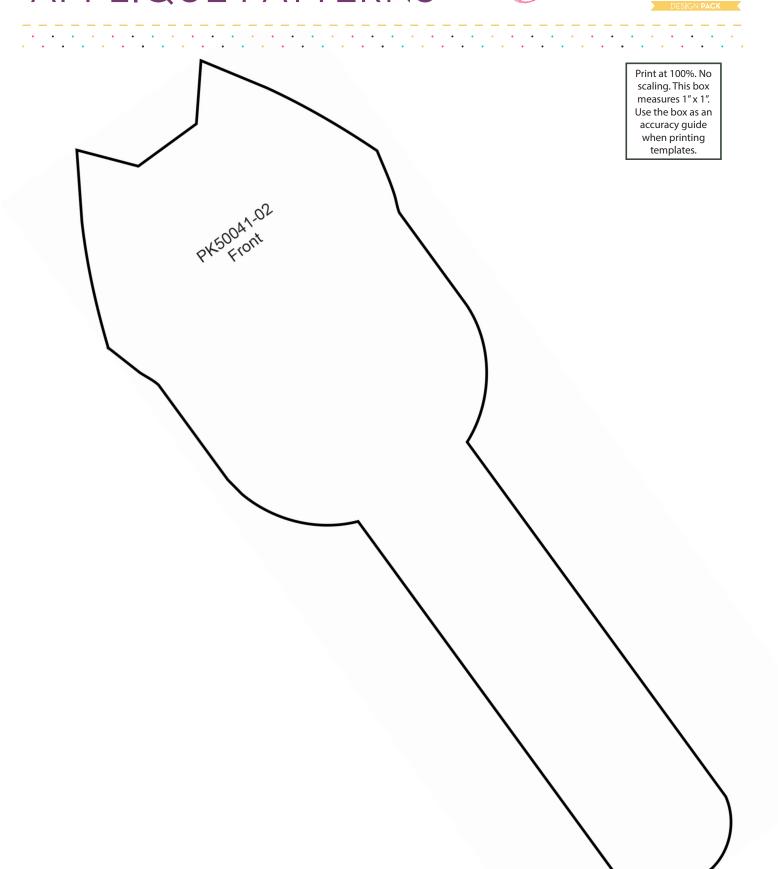


APPLIQUE PATTERNS OPSDERSIGN LESIGN DESIGN DESIGN DACK

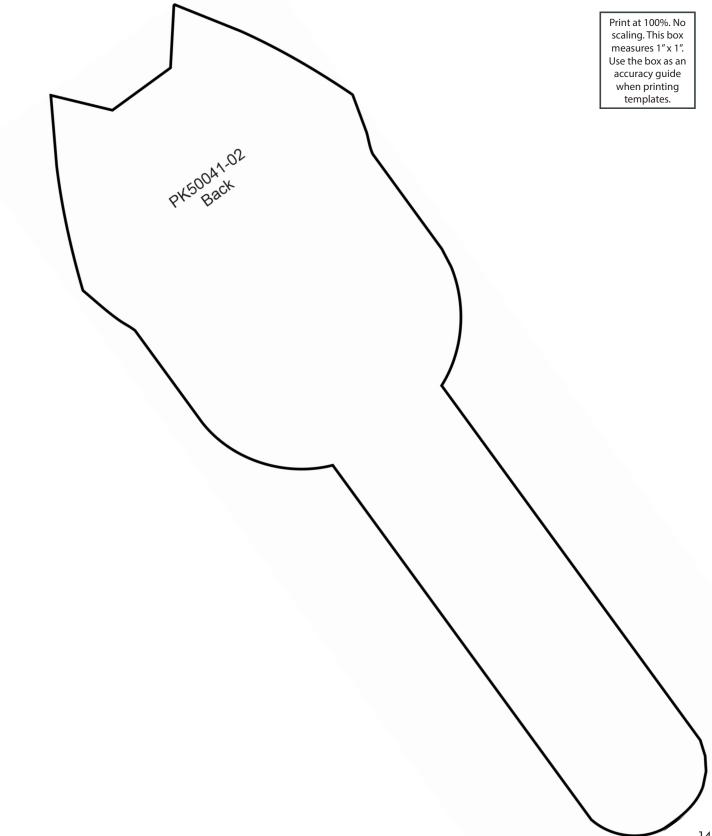



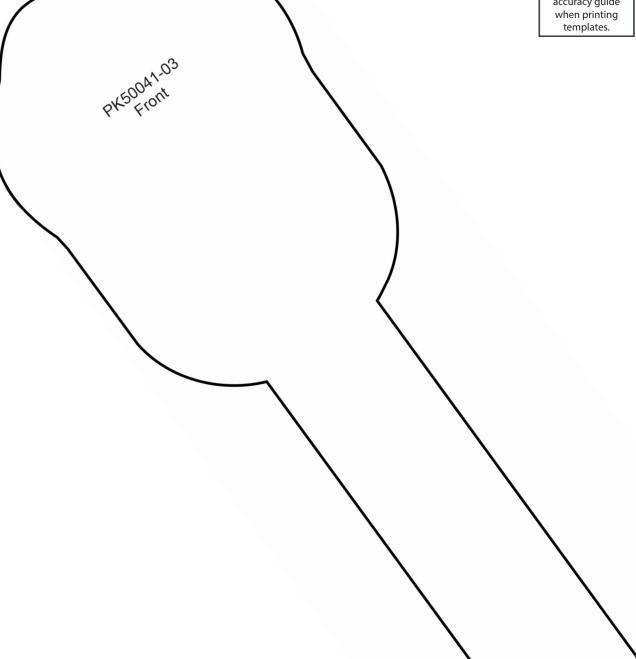




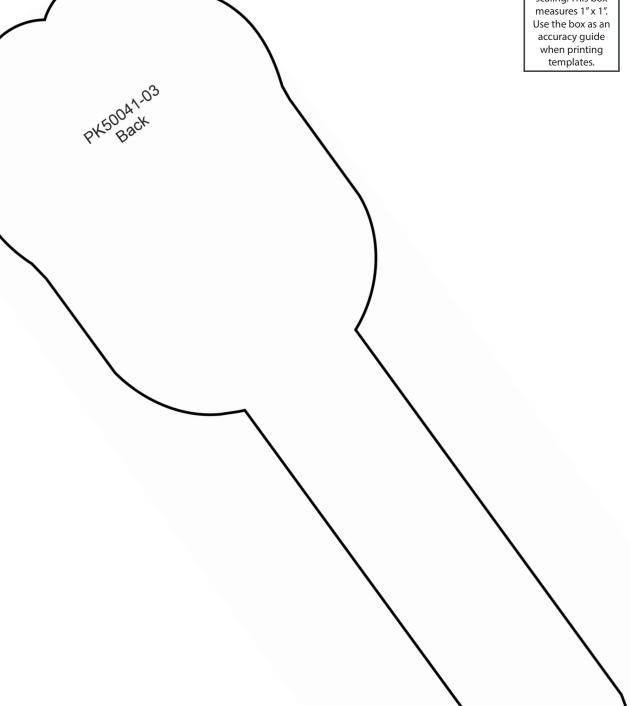


APPLIQUE PATTERNS





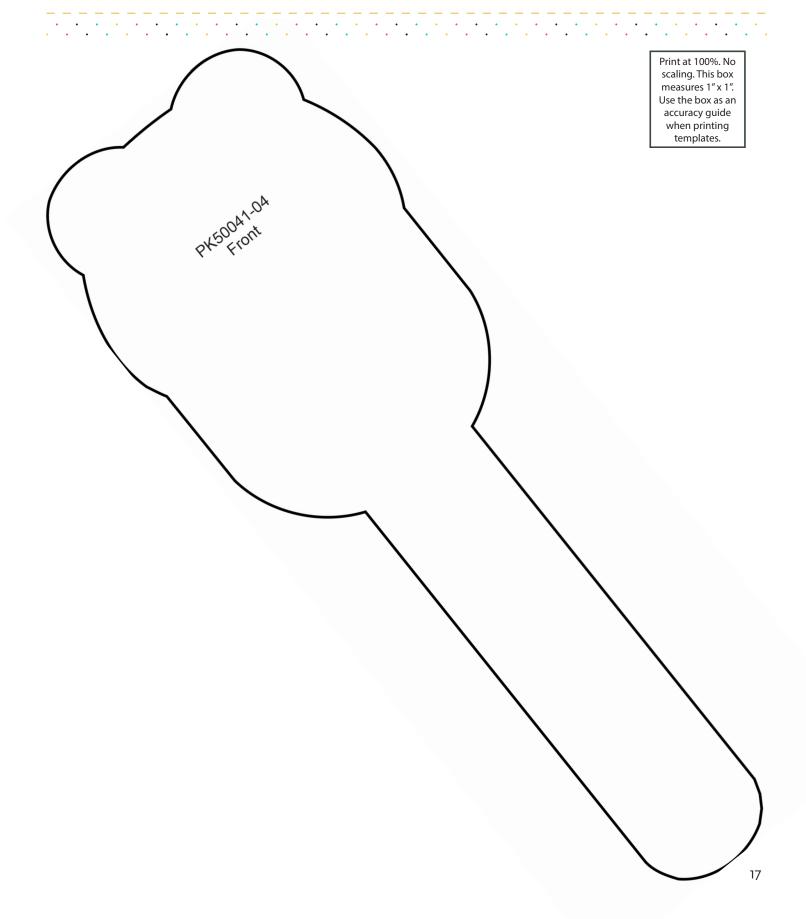

APPLIQUE PATTERNS OPSIGN Constant

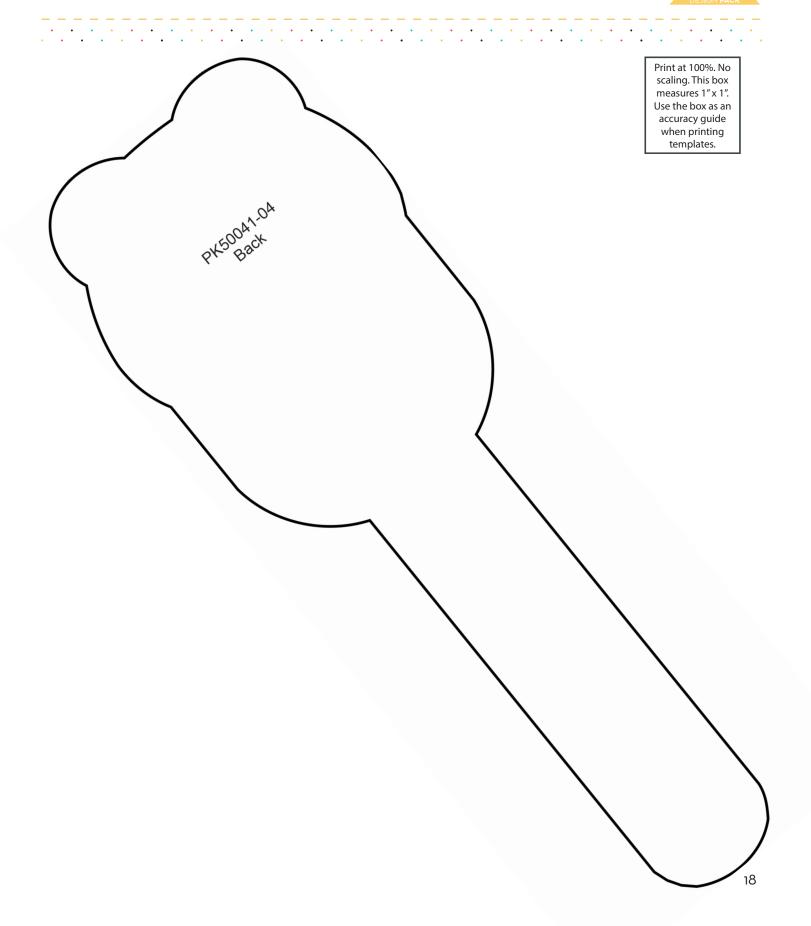

.


• • • • • •

.

• • •




.

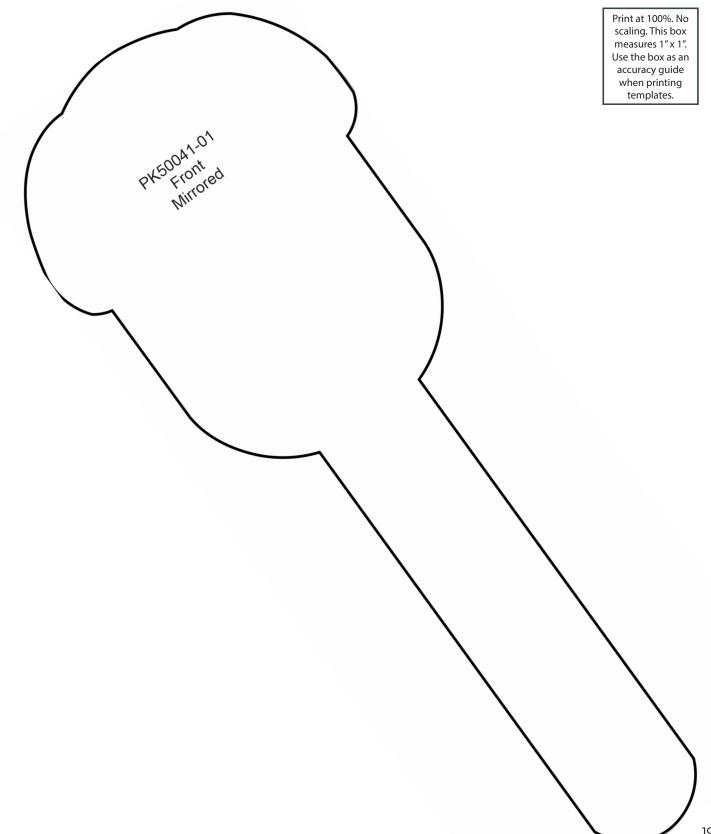

• • • • • •



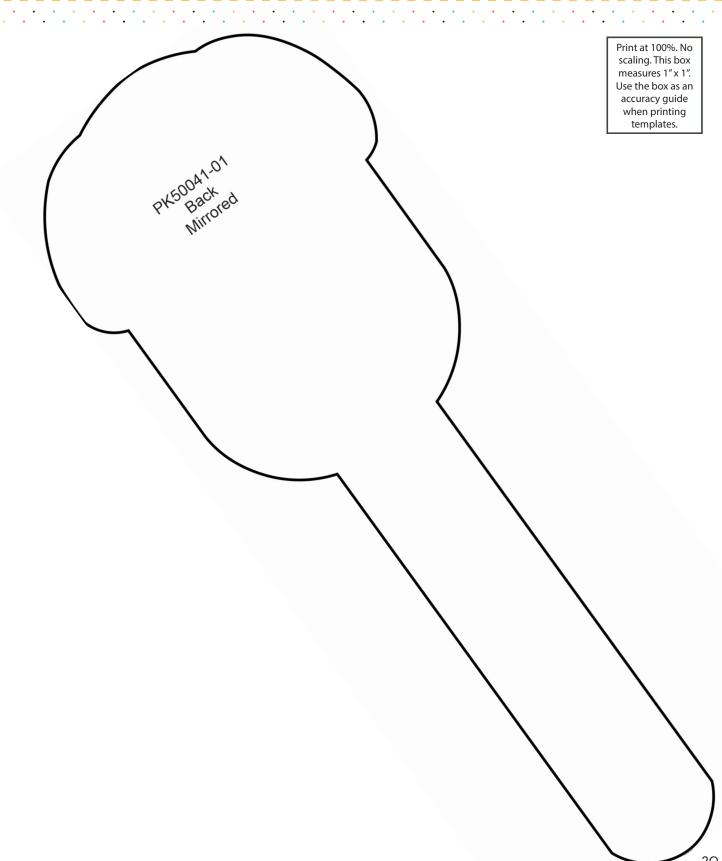

•

••••


.

•

• • • • • •

.



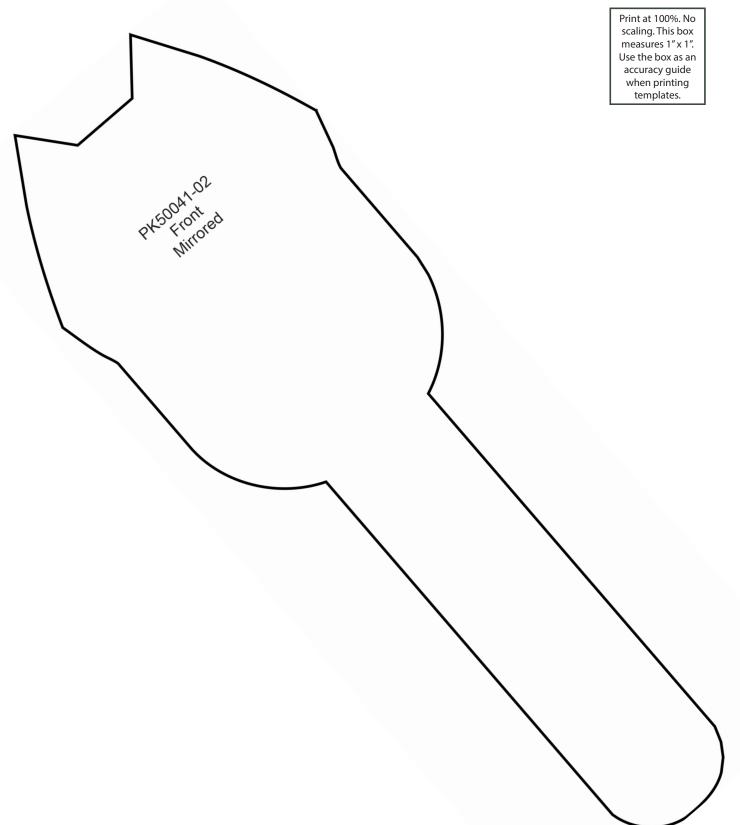

.


•••••

۰.

•

••••



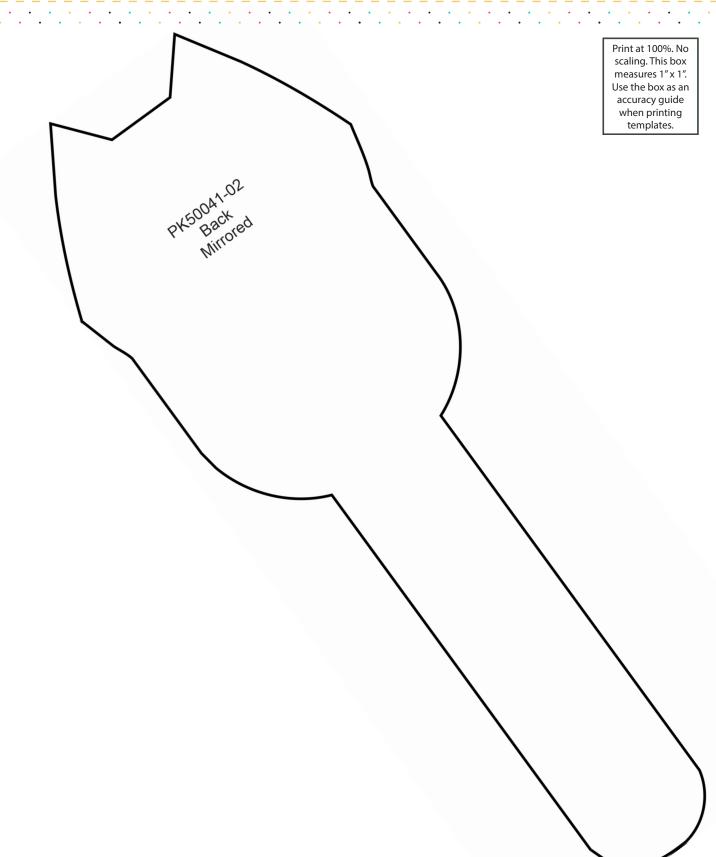


•

• • • • • •





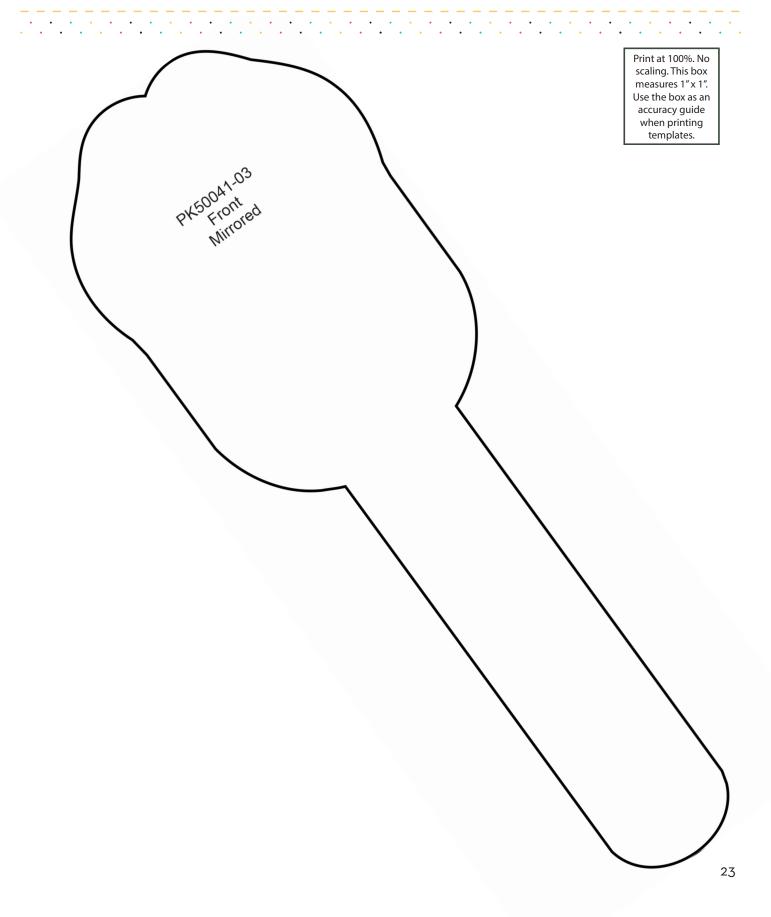


• • • • • •

.




· · · · · · · · · · · · ·

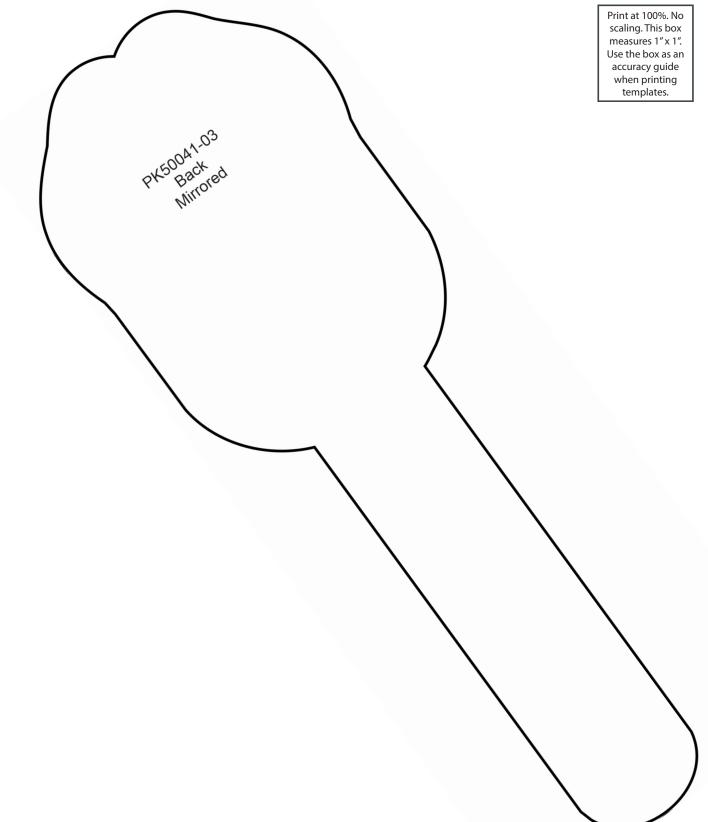

•••••



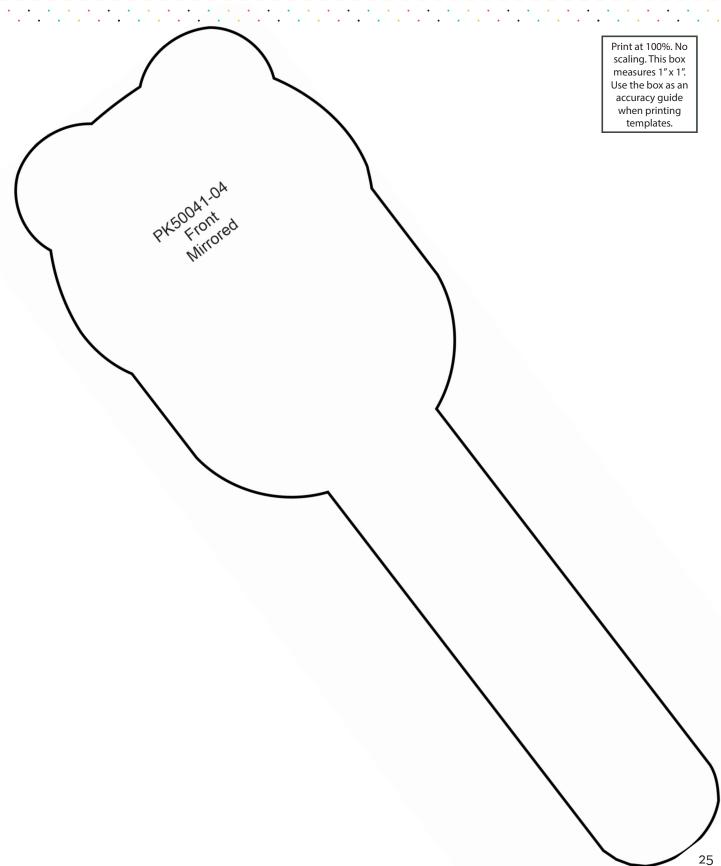

••••

• . •

.

• • • • • •


•

. . .



.



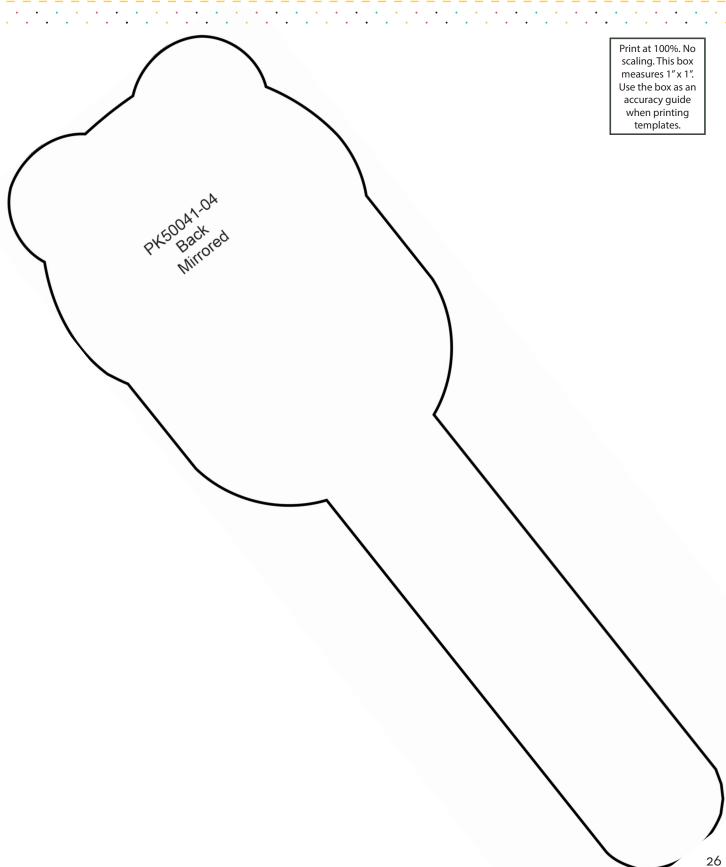

. . .

.