

Friends Appliques



Collection No. WB10064
13 Designs

Isacord Thread Colors

0015	White	1133	Peru	2776	Black Chrome
0020	Black	1140	Meringue	2830	Wild Iris
0101	Eggshell	1311	Date	2910	Grape
0520	Daffodil	1312	Burnt Orange	3030	Amethyst
0640	Parchment	1332	Harvest	3040	Lavender
0660	Vanilla	1351	Starfish	3274	Battleship Gray
0670	Cream	1430	Melon	3652	Baby Blue
0713	Lemon	1514	Brick	3713	Cornflower Blue
0771	Rattan	1521	Flamingo	3971	Silver
0781	Candlewick	1600	Spanish Tile	4073	Metal
0811	Candlelight	1725	Terra Cotta	4103	California Blue
0821	Honey Gold	1761	Tea Rose	4116	Dark Teal
0824	Liberty Gold	1902	Poinsettia	4122	Peacock
0842	Toffee	2152	Heather Pink	4240	Spearmint
0851	Old Gold	2224	Claret	4610	Deep Aqua
0853	Pecan	2241	Mauve	4620	Jade
0932	Nutmeg	2650	Impatiens	4952	Mystic Ocean
1114	Clay	2655	Aura		

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

GENERAL APPLIQUE SUPPLIES CUT IN PLACE

Stabilizers

- OESD SoftWeb
- OESD Heavy Weight TearAway

Fabrics/Textiles

Assorted applique fabrics
Desired background fabric

 **Note: An OESD Tea Towel is shown here.**

Notion & Tools

- OESD Grippy Grid
- OESD Expert Embroidery Tape TearAway
- OESD Perfect Embroidery Press Cloth
- Embroidery Needle Sharp 75/11

Isacord Thread Colors

- Per thread chart

GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS


The applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

☑ **Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.**

Example design is Harry Potter Chibi Applique 1 WB10040-01.

Step 1

- Cut the applique fabrics 1/4" - 1/2" larger than the applique patterns. The applique patterns are included at the end of the instructions.
- Fuse one layer of SoftWeb to the wrong side of all applique fabrics to provide some body to the fabric.

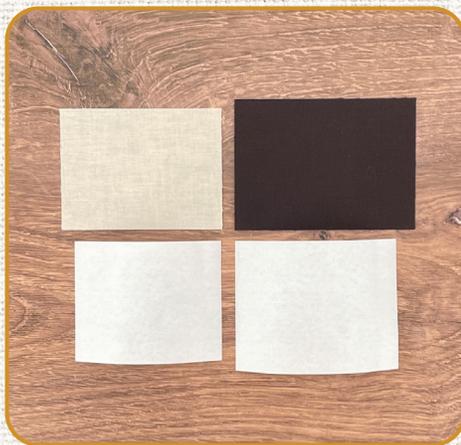

GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 2

- Using the OESD Grippy Grid, hoop the desired stabilizer and fabric for the project.

Note: The stabilizer shown is Heavy Weight TearAway under a tea towel.



Step 3



- Load the selected design into the machine.
- Example design is Harry Potter Chibi Applique 1 WB10040-01.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Use machine features to place the design as desired.
- Stitch Machine Step 1, Beige Fabric Placement Stitch.



GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 4


- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Remove the paper backing off the SoftWeb.
- Completely cover the placement stitch with the prepared beige applique fabric.
- Tape in place with OESD Expert Embroidery Tape TearAway to secure.

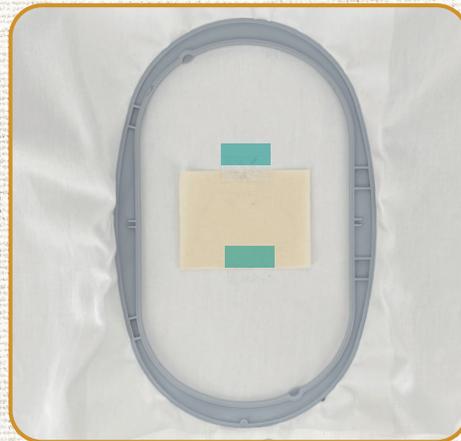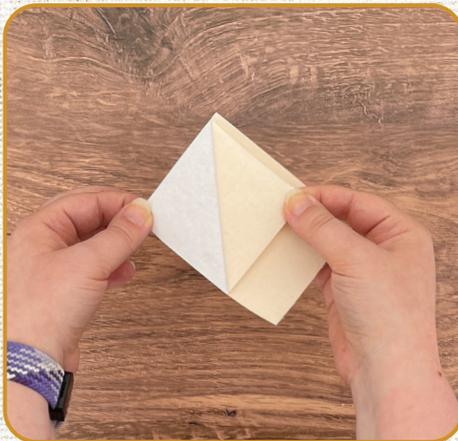

GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 5

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.

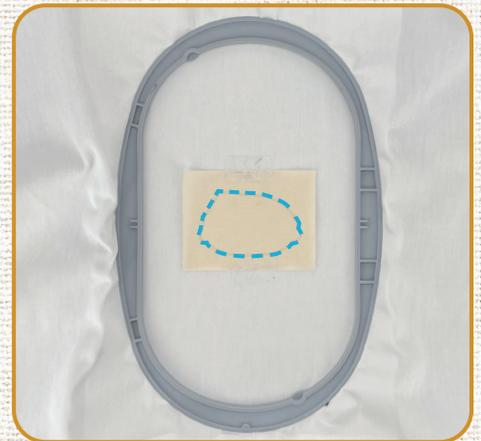

Step 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess fabric as close to the cut line as possible. If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.



GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS


Step 7

- Return the hoop to the machine.
- Stitch Machine Step 3, Brown Fabric Placement Stitch.



Step 8


- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Remove the paper backing off the SoftWeb.
- Completely cover the placement stitch with the prepared brown applique fabric.
- Tape in place to secure.

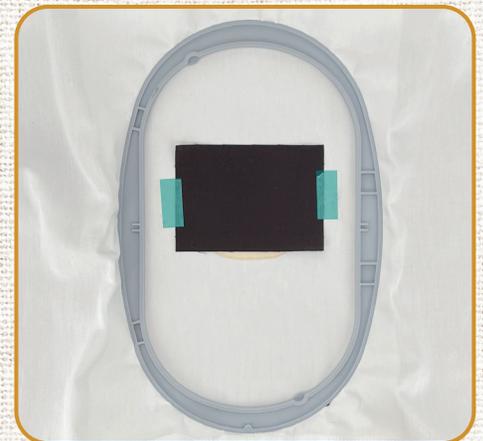

GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 9

- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.

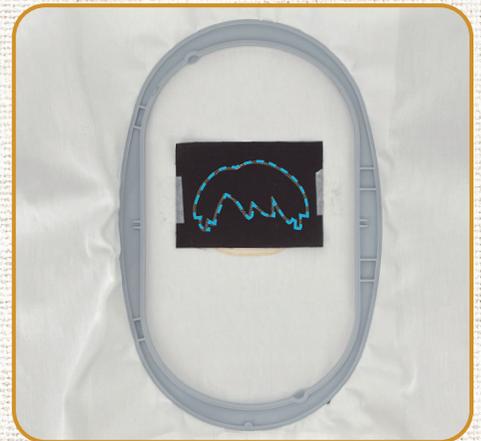

Step 10

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess fabric as close to the cut line as possible.



GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 11

- Return the hoop to the machine.
- Stitch the remaining machine steps per the thread chart.



Step 12

- When the design is complete, remove excess stabilizer.
- Press right side down on a Perfect Embroidery Press Cloth.



GENERAL CUT IN PLACE APPLIQUE INSTRUCTIONS

Step 13

- The design is complete. Enjoy!



GENERAL APPLIQUE SUPPLIES PRE-CUT

Stabilizers

- OESD Applique Fuse and Fix
- OESD Heavy Weight TearAway

Fabrics/Textiles

Assorted applique fabrics
Desired background fabric

 **Note: An OESD Tea Towel is shown here.**

Notion & Tools

- OESD Grippy Grid
- OESD Perfect Scoring Tool
- OESD Perfect Embroidery Press Cloth
- Embroidery Needle Sharp 75/11

Isacord Thread Colors

- Per thread chart

GENERAL PRE-CUT APPLIQUE INSTRUCTIONS

The applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

- ☑ **Note: Some thread colors in the instructions have been changed or digitally enhanced for better visibility.**

Example design is Hermione Granger Chibi Applique 1 WB10040-05.

Step 14

- Print the mirrored version of the applique patterns (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix. The applique patterns are included at the end of the instructions.
- Cut approximately 1/4" - 1/2" outside the printed applique patterns.



GENERAL PRE-CUT APPLIQUE INSTRUCTIONS


Step 15

- Cut the applique fabric 1/4" - 1/2" larger than the applique patterns.
- Fuse the trimmed patterns to the back of the applique fabric with the paper side of the printed patterns up. Hold the iron on the pattern for 10-15 seconds for a secure fuse.



Step 16

- Trim the appliques on the outer edges of the black outline.
- Set aside.

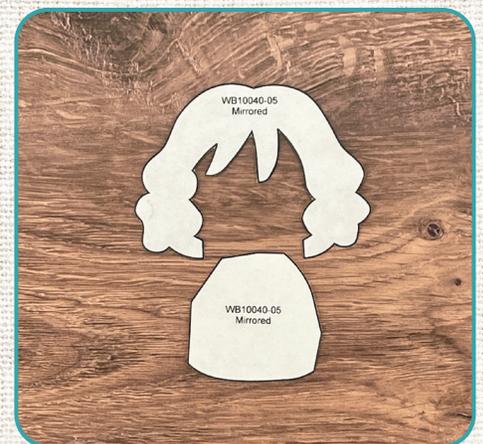

GENERAL PRE-CUT APPLIQUE INSTRUCTIONS

Step 17

- Using the OESD Grippy Grid, hoop the desired stabilizer and fabric for the project.

Note: The stabilizer shown is Heavy Weight TearAway under a tea towel.



Step 18

- Load the selected design into the machine.
- Example design is Hermione Granger Chibi Applique 1 WB10040-05.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Beige Fabric Placement Stitch.



GENERAL PRE-CUT APPLIQUE INSTRUCTIONS

Step 19

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the beige applique fabric, use the OESD Perfect Scoring Tool to score and remove the paper backing to reveal the adhesive surface.
- Place the fabric within the placement stitching.
- Finger press to secure.

Tip: Applique Fuse and Fix is repositionable.



GENERAL PRE-CUT APPLIQUE INSTRUCTIONS

Step 20

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.
- Stitch Machine Step 3, Tan Fabric Placement Stitch.



Step 21

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the tan applique fabric, score and remove the paper backing to reveal the adhesive surface.
- Place the fabric within the placement stitching.
- Finger press to secure.



Tip: Applique Fuse and Fix is repositionable.

GENERAL PRE-CUT APPLIQUE INSTRUCTIONS

Step 22

- Return the hoop to the machine.
- Stitch the remaining machine steps per the thread chart.



Step 23

- When the design is complete, remove excess stabilizer.
- Press right side down on a Perfect Embroidery Press Cloth.



GENERAL PRE-CUT APPLIQUE INSTRUCTIONS


Step 24

- The design is complete. Enjoy!




ATTENTION

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

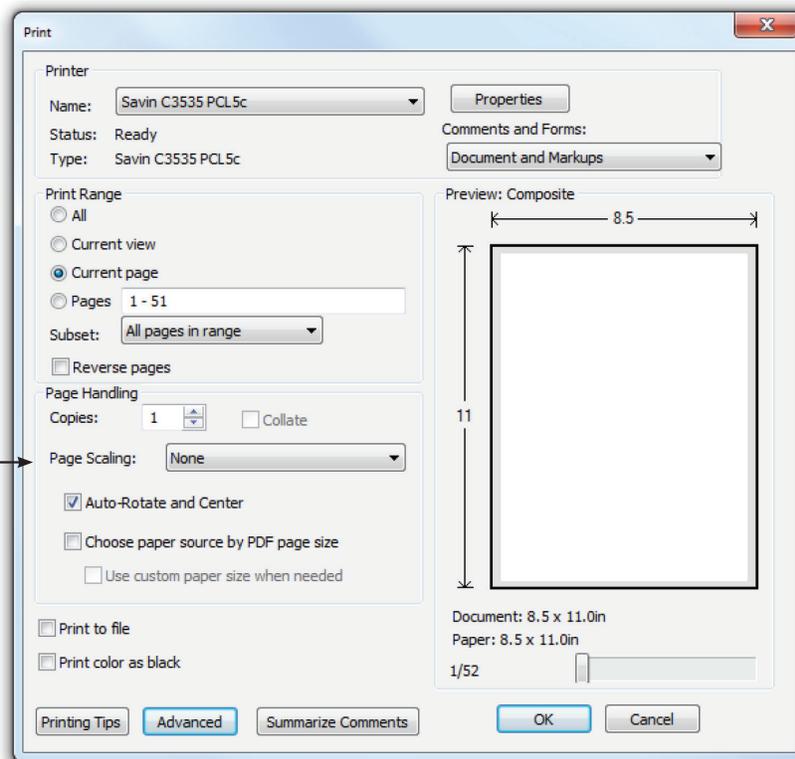


TO SAVE PAPER

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.




Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.


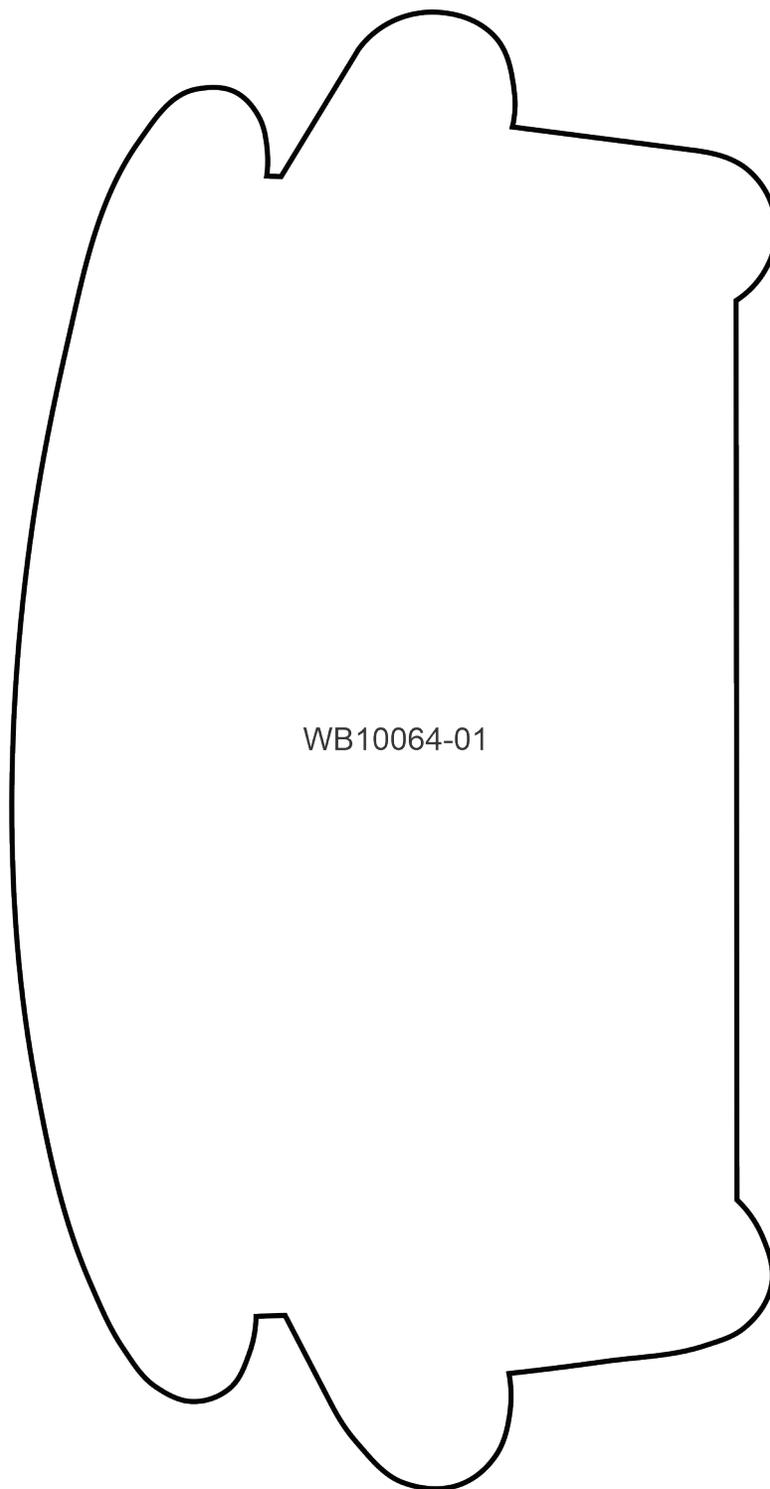


WB10064-01


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

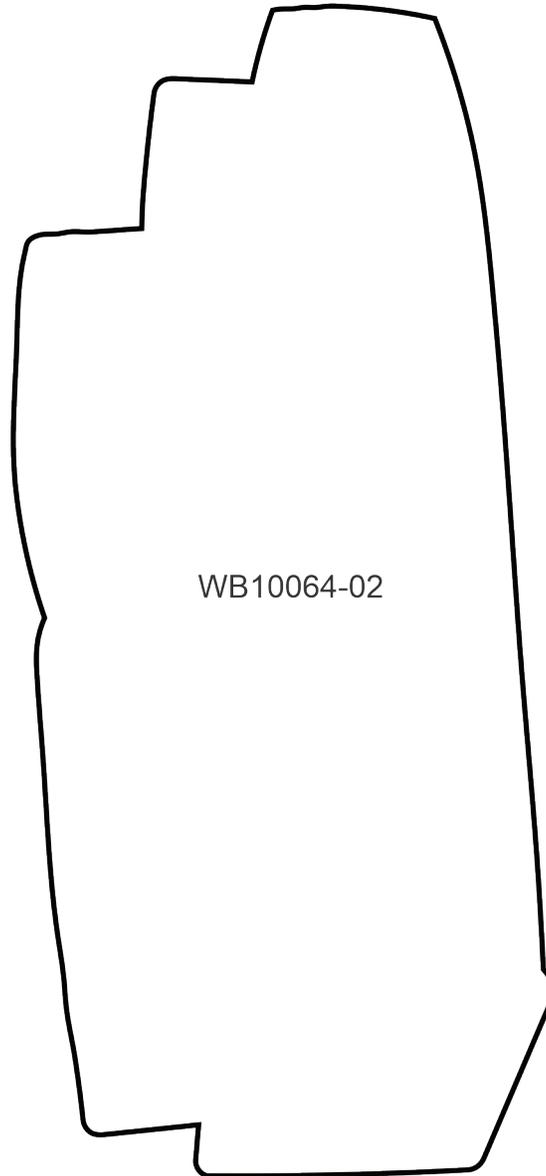


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

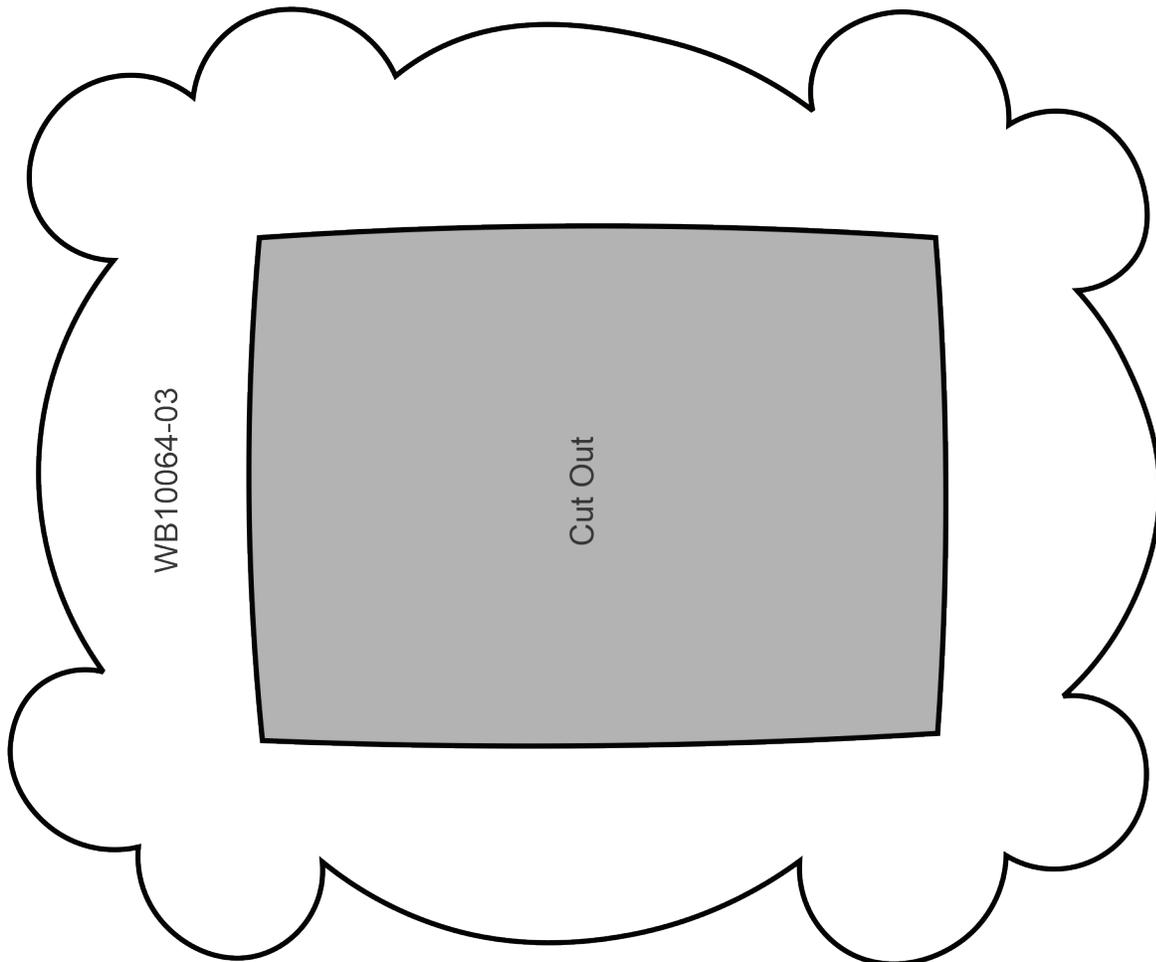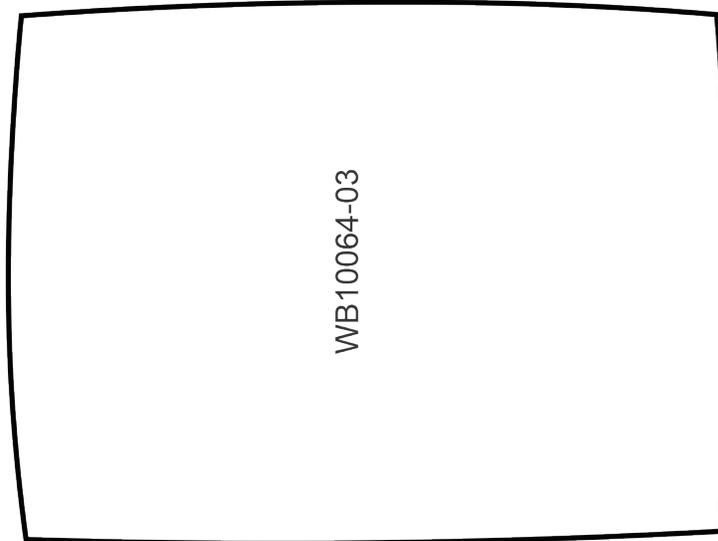

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

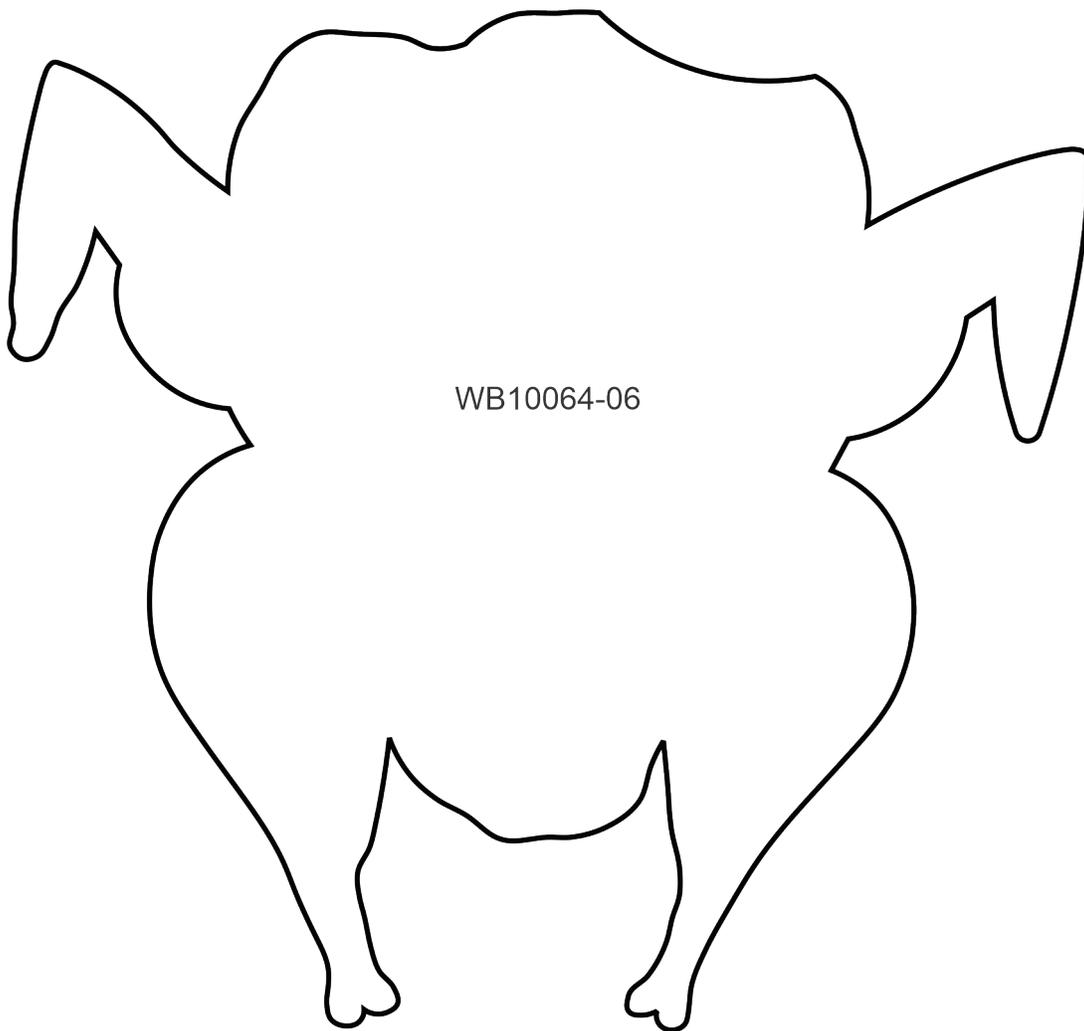


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

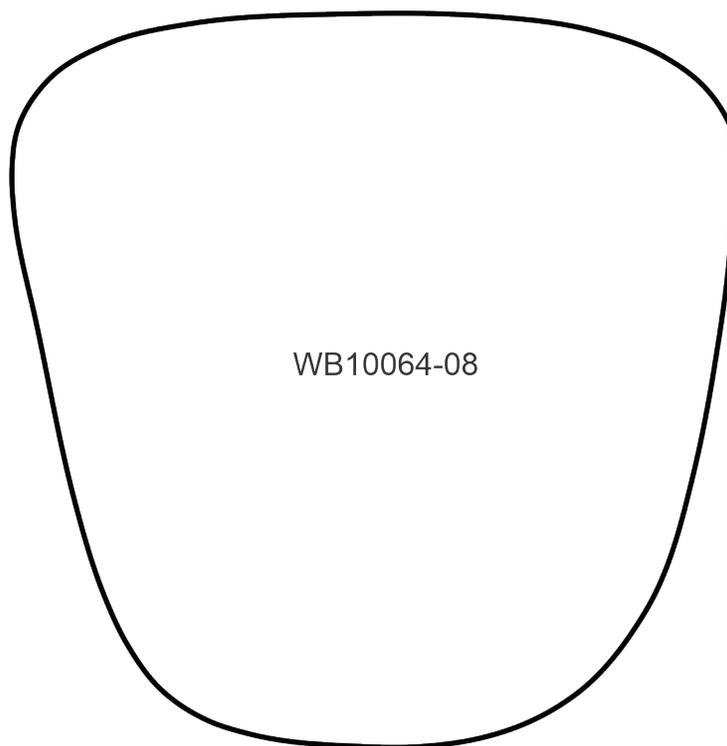


WB10064-08

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

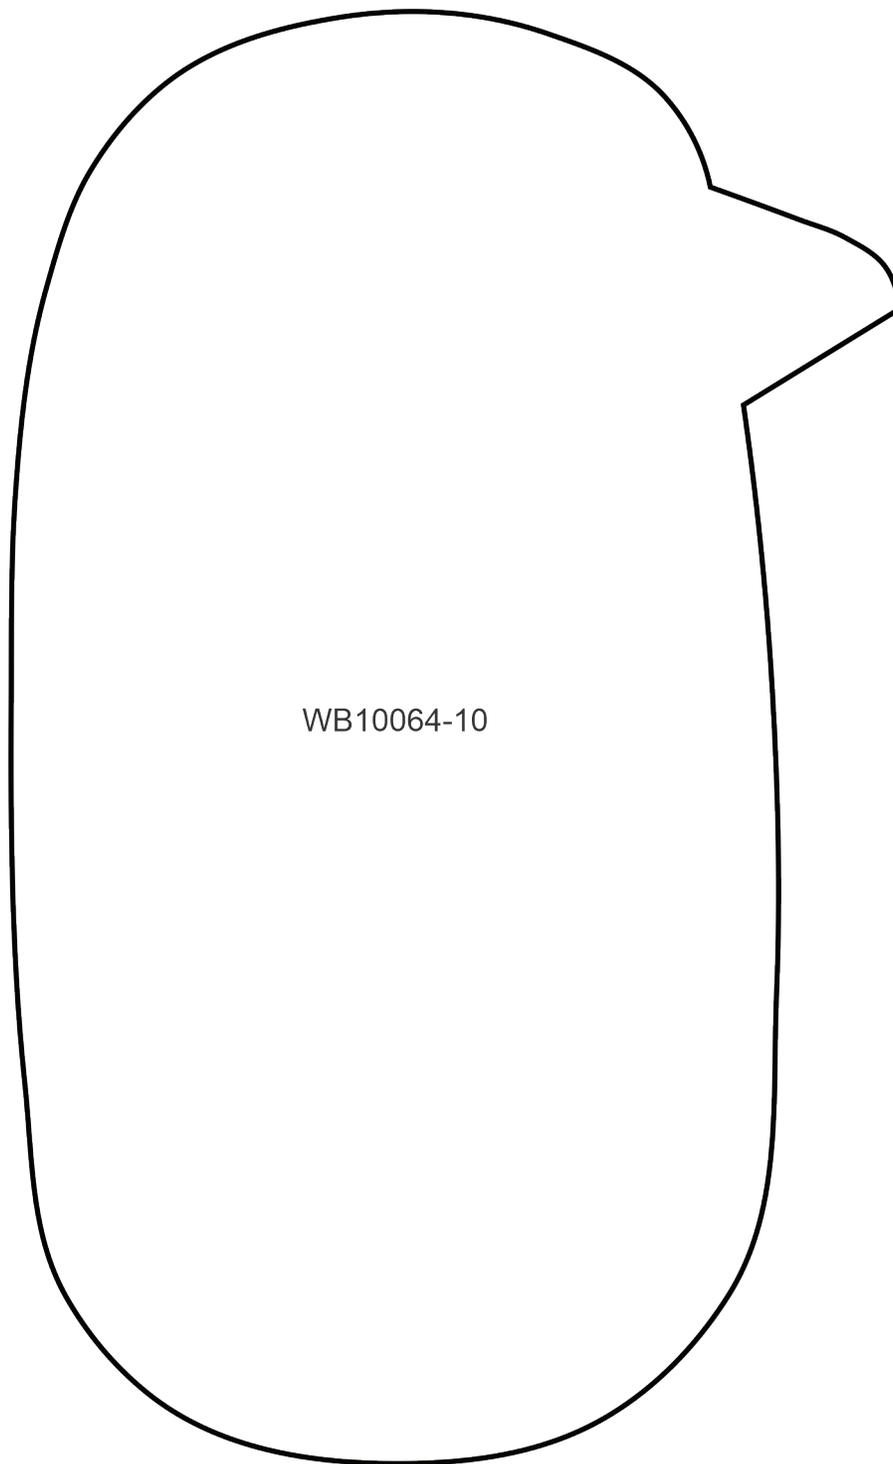


WB10064-10

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

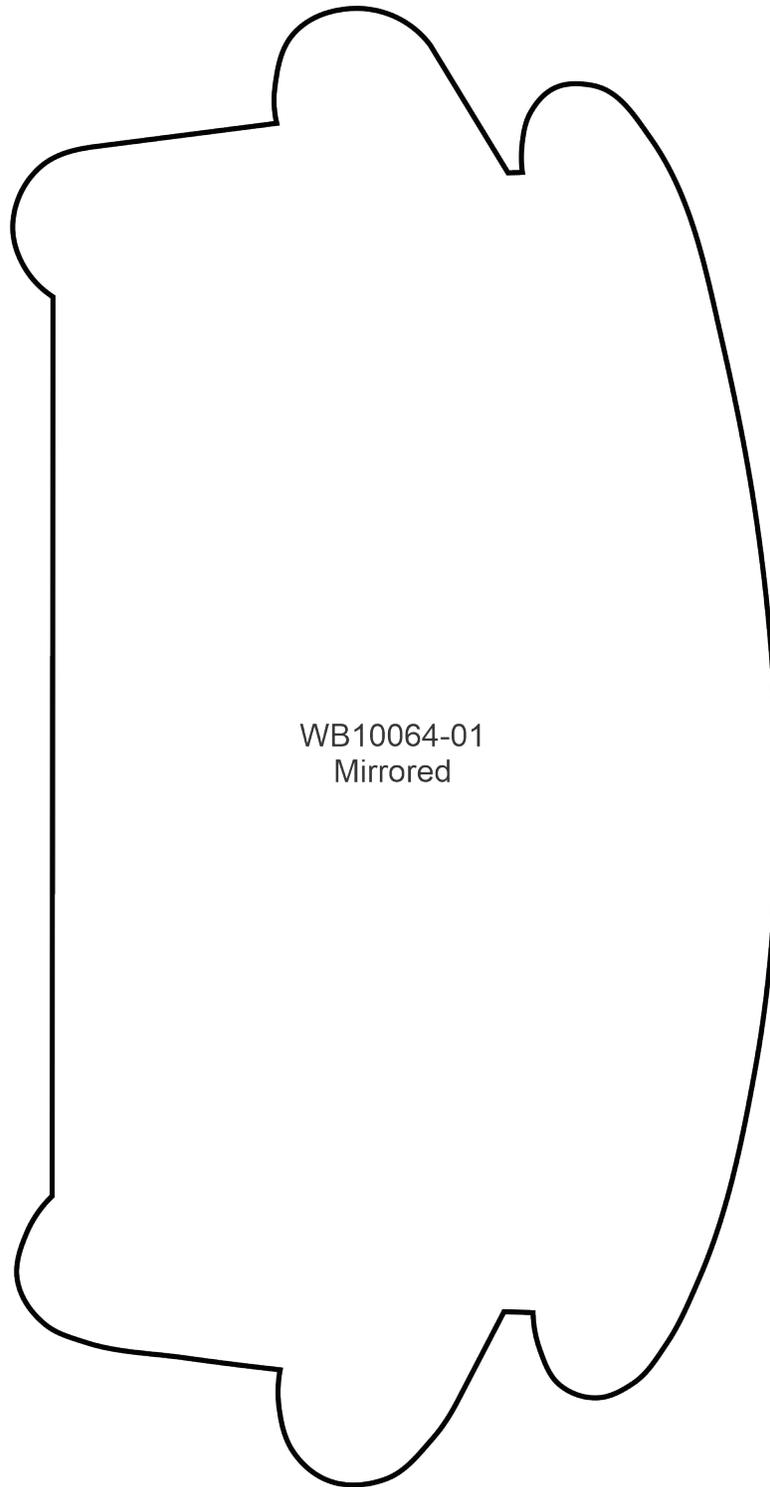



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

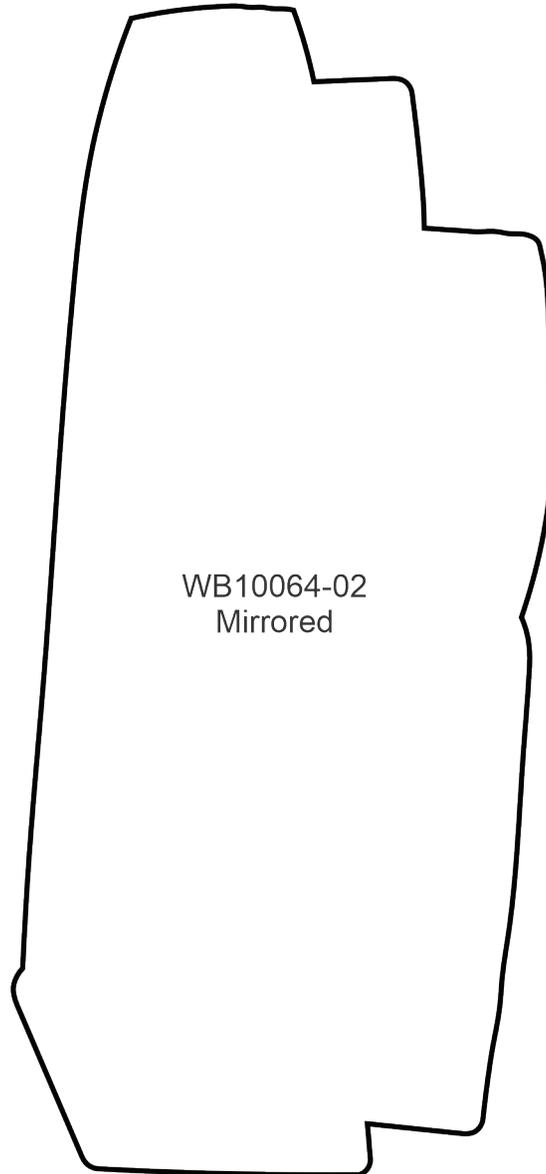


MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

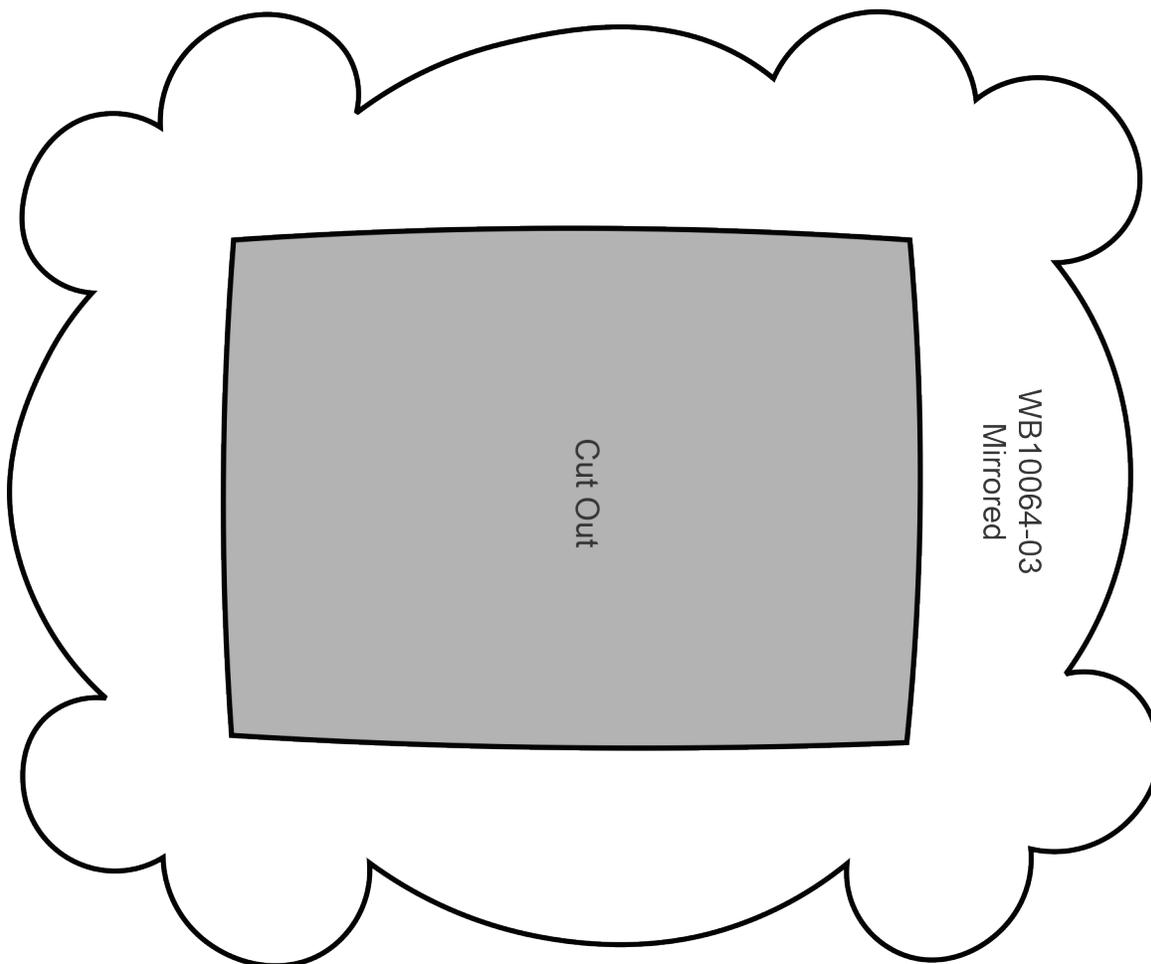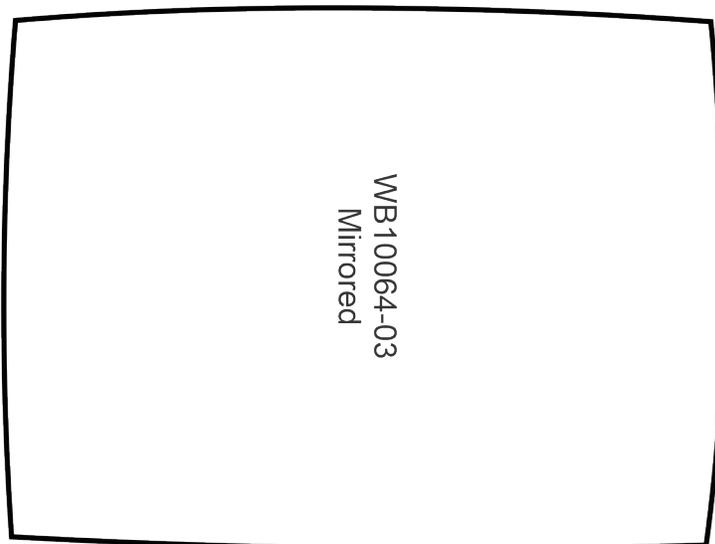


Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

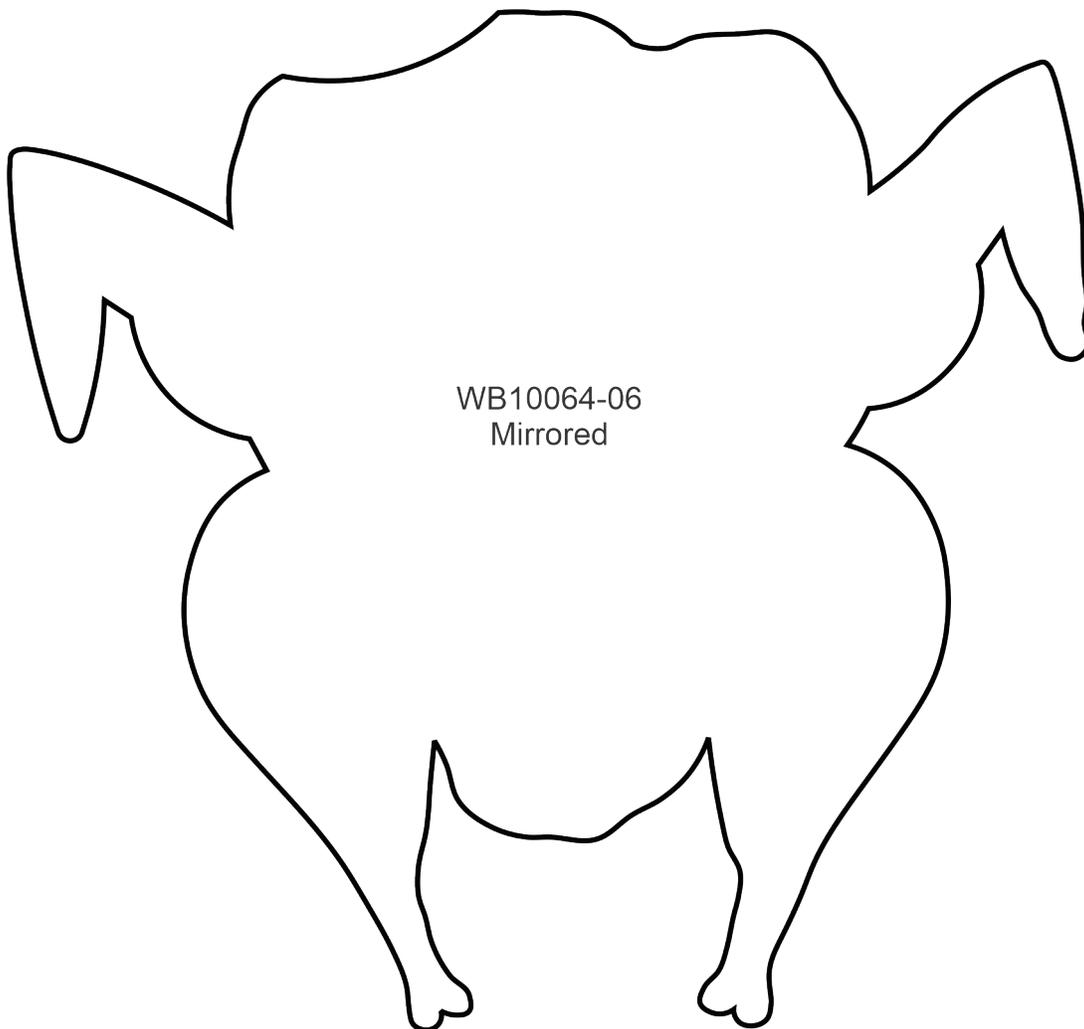

MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

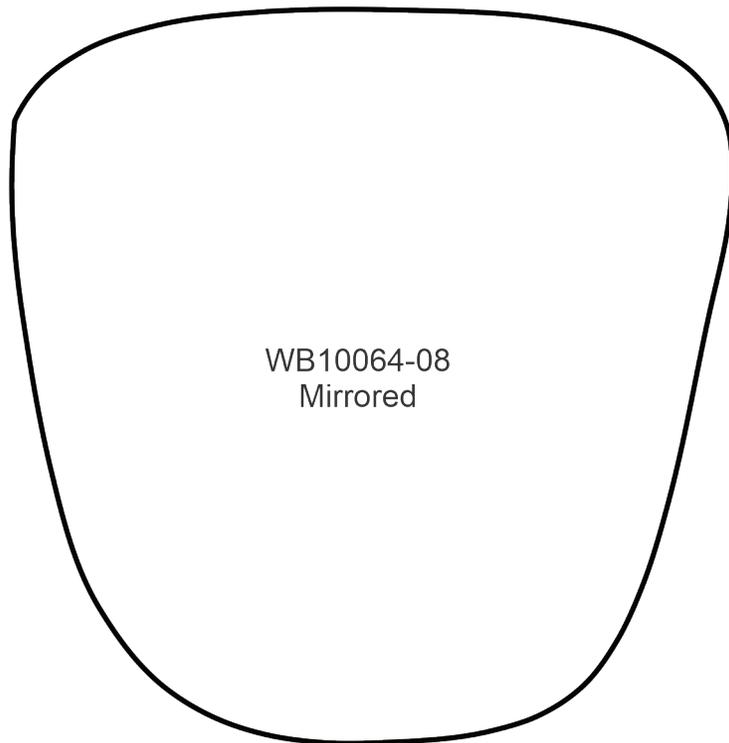

MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.



WB10064-10
Mirrored